www.sdcsecurity.com service@sdcsecurity.com
[t] 800.413.8783 805.494.0622 [f] 805.494.8861
801 Avenida Acaso, Camarillo CA 93012 • PO Box 3670, Camarillo CA 93011-3670

474U 2-SPDT Touchless Exit Switch

No Touch Wave-to-Exit Switch
For Sanitary Entry/Exit applications

- ***DPDT Dry Contact Output***
- ***No Moving Parts***
- ***Bi-color Status Illumination***



474




474D


Features & Applications

- Uses IR Sensor technology; device is active with the simple wave of a hand
- Designed to control electric locks/strikes, magnetic locks, or automatic door operators
- Ideal for use in sanitary applications such as cleanrooms, bathrooms, food processing, hospitals and labs.
- Sensing Range up to 4" (10.2cm)
- Mounted on a durable stainless steel plate
- Dual LED, illuminated sensor, Red/Green indicates Inactive/Active status
- Quick connect screwless terminal block for easy installation

Specifications

Input: 25mA (standby); 55mA (Active) @ 12/24VDC
Output: 2-SPDT, 3 Amp Dry Contact
Activation Time:
1 second or as long as sensor is triggered
LED Color: Standby RED; Active Green
Range: 5" (12.7cm)
Weight: 3 oz. (85g)
Dimensions: 4.5" x 2.75" x 1.375"
(115 x 70 x 35mm)

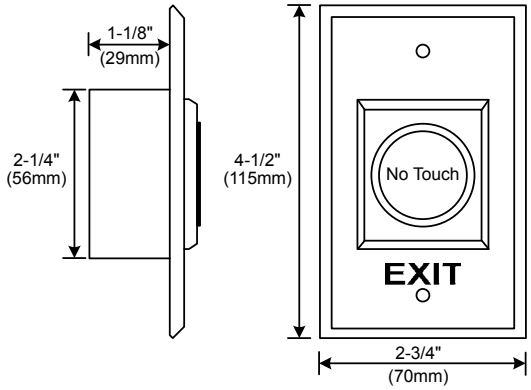

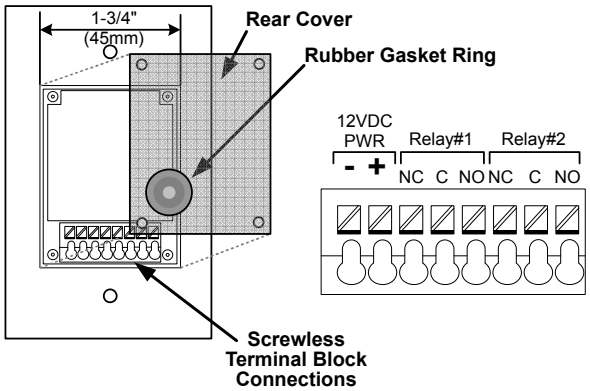

© 2013 Security Door Controls LIT-474U 07/13
M:\Marketing Files\In-House Pubs\Datasheets\Exit Switches\474 Exit Switch.indd

Price & Installation