
MAGLOCKS

ECONOMICAL ELECTROMAGNETIC LOCK WITHOUT TIME DELAY



PRIMARY APPLICATIONS



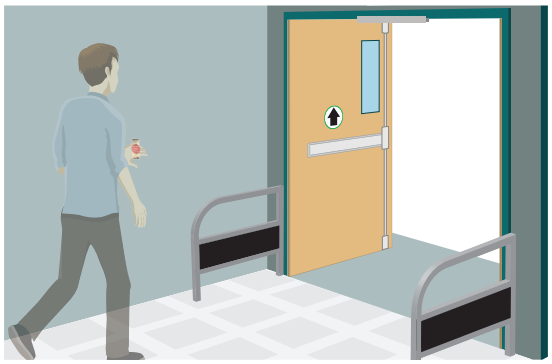

DESCRIPTION

BEA's Non UL Listed Maglocks are part of the portfolio of request to exit products, including presence sensors, power supplies, heavy duty piezoelectric devices, illuminated buttons, access keypads and other peripheral devices.

These locks provide a low voltage solution ideal for hotels, office buildings and low-risk security egress control. They are intended for indoor applications and dry environments.

BEA's Non UL Listed Maglocks are available in standard surface mount, single and double door configurations with holding forces of 600 or 1,200 lbs. All models include a lock status sensor with visible LED. A 100 lb surface mount single/cabinet maglock is also available for low holding force applications.

FEATURES & BENEFITS

- Lock status sensor with visible LED (not available on 100 lb models)
- Lock status sensor offers either normally open (NO) or normally closed (NC) output configurations (not available on 100 lb models)
- Input voltage of 12/24 VDC
- Variety of mounting hardware available
- Available in access control packages with sensor logic, module actuator, power supply and maglock
- This solution is tested and certified with all other BEA request to exit devices, including maglocks, sensors, logic modules, power supplies and other peripherals
- Backed by BEA's Technical Support Specialists, excellent customer service and BEA's Sensor Integration School.

A HALMA COMPANY

BEA, Inc.
RIDC Park West
100 Enterprise Drive
Pittsburgh, PA 15275-1213

Customer Service: 800.523.2462
Technical Support: 800.407.4545
www.BEAinc.com

RELATED REQUEST TO EXIT PRODUCTS



R2E-100



FLY KIT



BR3 LOGIC MODULE



ACTUATORS



ELECTRIC STRIKES



POWER SUPPLIES

TECHNICAL SPECIFICATIONS

10MAGLIFELOCK9

Door Configuration	Single/Cabinet, surface mount
Holding Force	100 lbs
Input Voltage	12/24 VDC
Current Draw	120 mA @ 12 VDC 60 mA @ 24 VDC
Dimensions	2.76 in x 1.40 in x 0.79 in

10MAGLOCK3

Door Configuration	Single, surface mount
Holding Force	600 lbs
Input Voltage	12/24 VDC
Current Draw	.40 A @ 12 VDC .20 A @ 24 VDC
Dimensions	9.84 in x 1.85 in x 1.02 in

10MAGLOCK6

Door Configuration	Double, surface mount
Holding Force	600 lbs
Input Voltage	12/24 VDC
Current Draw	.83 A @ 12 VDC .42 A @ 24 VDC
Dimensions	19.76 in x 1.85 in x 1.02 in


10MAGLOCK1

Door Configuration	Single, surface mount
Holding Force	1200 lbs
Input Voltage	12/24 VDC
Current Draw	.52 A @ 12 VDC .25 A @ 24 VDC
Dimensions	10.47 in x 2.91 in x 1.58 in


10MAGLOCK5

Door Configuration	Double, surface mount
Holding Force	1200 lbs
Input Voltage	12/24 VDC
Current Draw	1.03 A @ 12 VDC .52 A @ 24 VDC
Dimensions	20.94 in x 2.91 in x 1.58 in


PRODUCT FAMILY




10MAGLIFELOCK9
100 LB,
CABINET LOCK




10MAGLOCK3
600 LB, SINGLE



10MAGLOCK6
600 LB, DOUBLE



10MAGLOCK1
1200 LB, SINGLE



10MAGLOCK5
1200 LB, DOUBLE

BEA'S COMPLETE MAGLOCK PORTFOLIO

Maglock Portfolio	Description
Non UL Series	Single or Dual surface mount 100 lbs, 600 lbs and 1200 lbs 12/24 VDC
UL Series	Single or Dual surface mount 600 lbs and 1200 lbs 12/24 VDC Adjustable relock time display (0-9 secs) With or without Door Status Sensor
UL Certified Gatelock	Single, front or side mount NEMA 4 1200 lbs 12/24 VDC With or without monitoring
Delayed Egress Maglock	NFPA/ADA compliant kits available
Request to Exit	NFPA/ADA compliant kits available

© 2015 BEA, Inc. All rights reserved.

MAGLOCKS ECONOMICAL ELECTROMAGNETIC LOCK WITHOUT TIME DELAY

BEA, Inc.
RIDC Park West
100 Enterprise Drive
Pittsburgh, PA 15275-1213

Customer Service: 800.523.2462
Technical Support: 800.407.4545

79.0009.08 20150930

A HALMA COMPANY