
# UL LISTED GATELOCKS

## WEATHER RESISTANT, ELECTROMAGNETIC LOCK





### PRIMARY APPLICATIONS

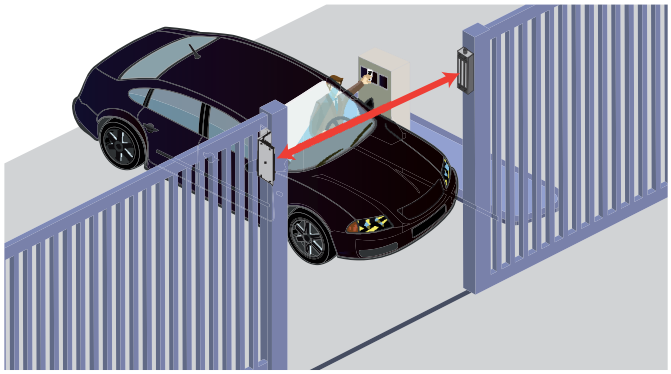



### DESCRIPTION

BEA's UL Listed Gatelocks are designed to withstand the elements, featuring a stainless steel exterior and NEMA 4 enclosure to protect internal electronics. It's weather-resistant construction makes it ideal for industrial gate and exterior door applications.

With a holding force of 1,200 lbs, the Gatelock is available in both a front mount model for sliding gates and a side mount model for swinging doors/gates. These locks include a built-in lock status sensor with a output relay.

### FEATURES & BENEFITS

- Available in front or side mount with a 1,200 lb holding force
- Front mount model comes with a 3/4 inch male NPS threaded conduit fitting
- Built-in remote lock status sensor with an output relay
- Built-in surge protection
- Weather-resistant, stainless steel housing makes these locks suitable for outdoor applications

BEA
A HALMA COMPANY

BEA, Inc.
RIDC Park West
100 Enterprise Drive
Pittsburgh, PA 15275-1213

Customer Service: 800.523.2462
Technical Support: 800.407.4545
www.BEAinc.com

## RELATED SECURITY PRODUCTS



LZR-S600



BR3 LOGIC MODULE



WEATHER-RESISTANT KEYPAD



POWER SUPPLIES

## TECHNICAL SPECIFICATIONS


**10GL1200R**


| | |
|---|---|
| **Door Configuration** | Sliding Gate, front mount |
| **Holding Force** | 1,200 lbs |
| **Input Voltage** | 12/24 VDC (UL Listed power supply recommended) |
| **Current Draw** | 500 mA @ 12 VDC<br>250 mA @ 24 VDC |
| **Relay Switch** | 250 mA @ 12 VDC<br>125 mA @ 24 VDC |
| **Dimensions** | 8.75 in x 2.50 in x 1.625 in |
| **Material** | Stainless steel |
| **Sensor** | Lock status sensor with relay output |
| **Cable Specifications** | 24 AWG 7 conductor cable, 3.5 ft |
| **Norm Conformance** | UL and CUL<br>ANSI 156.10<br>NEMA 4 / IP65 |
| **Conduit Fitting (10GL1200R ONLY)** | 3/4 inch NPS conduit fitting<br>14 threads per inch |

**10GL1200SR**

| | |
|---|---|
| **Door Configuration** | Swinging Door/Gate, side mount |
| **Holding Force** | 1,200 lbs |
| **Input Voltage** | 12/24 VDC (UL Listed power supply recommended) |
| **Current Draw** | 500 mA @ 12 VDC<br>250 mA @ 24 VDC |
| **Relay Switch** | 250 mA @ 12 VDC<br>125 mA @ 24 VDC |
| **Dimensions** | 8.75 in x 2.50 in x 1.625 in |
| **Material** | Stainless steel |
| **Sensor** | Lock status sensor with relay output |
| **Cable Specifications** | 24 AWG 7 conductor cable, 9.5 ft |
| **Norm Conformance** | UL and CUL<br>ANSI 156.10<br>NEMA 4 / IP65 |

## DIMENSIONAL DRAWINGS

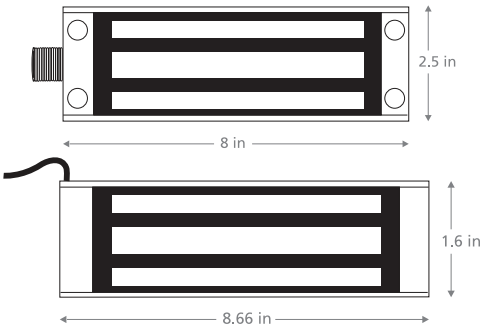

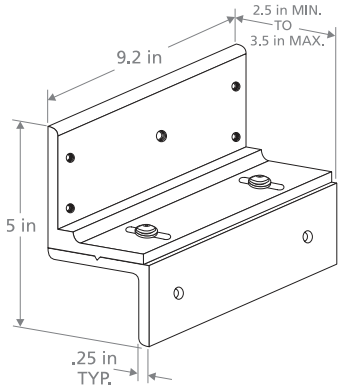

## RELATED PRODUCTS



10GL1200R
1200 LB,
FRONT MOUNT
FOR SLIDING GATE



10GL1200SR
1200 LB,
SIDE MOUNT FOR
SWINGING DOOR/GATE



10LZBRGATE1200
LZ MOUNTING
BRACKETS



10PS12-24
UL/CUL LISTED
POWER SUPPLY



10PS12-24D
UL/CUL LISTED
POWER SUPPLY WITH
BATTERY BACKUP


© 2016 BEA, Inc. All rights reserved.

**UL LISTED GATELOCKS** WEATHER RESISTANT, ELECTROMAGNETIC LOCK

BEA, Inc.
RIDC Park West
100 Enterprise Drive
Pittsburgh, PA 15275-1213

Customer Service: 800.523.2462
Technical Support: 800.407.4545



A HALMA COMPANY