Norton®

ASSA ABLOY

Installation Instructions

An Incorrectly installed or improperly adjusted door closer can cause property damage or personal injury. These installation instructions should be followed to avoid the possibility of misapplication or misadjustment.

8000 Series


Non Handed Door Closer

Non Hold Open Models


Parallel Arm Installation

Adjustable (Sizes 1 thru 6)

P8101
P8301
P8501

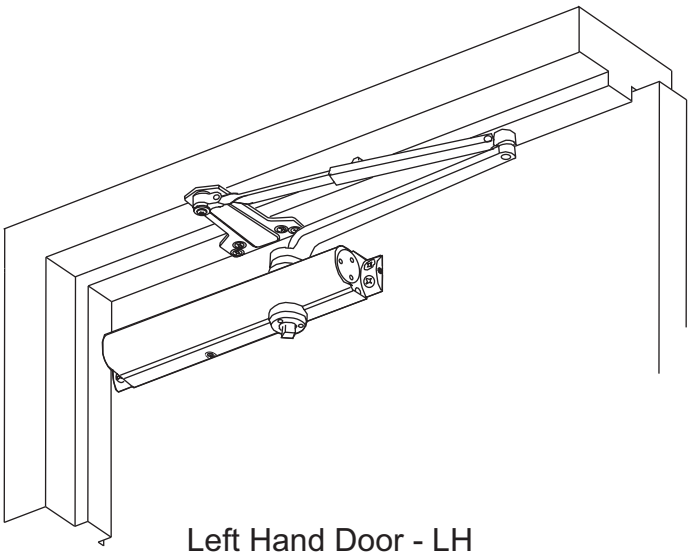

Left Hand Door - LH
Right Hand Reverse - RHR

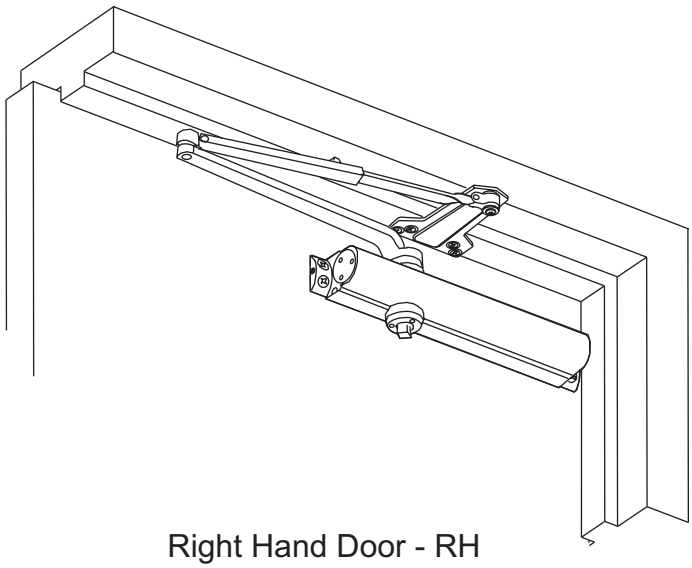


Right Hand Door - RH
Left Hand Reverse - LHR

- "DA" suffix (Delayed Action) is an optional feature.
- **NOTE:** For special applications a separate door and frame preparation template is packed with these instructions. Use this instruction sheet for installation sequence and closer adjustments only.
- Doors should be hung on ball bearing or anti-friction hinges.
- A separate door stop is recommended.
- Door and frame must be properly reinforced.
- Always adjust spring power before adjusting control valves.
- Adjust closing time speed between 3 and 7 seconds from 90° to 0°. Greater closing times may be required for elderly or handicapped.
- These door closers should NOT be installed on the exposed side (weather side) of exterior doors.


Copyright © 2004, 2014 Yale Security Inc., an ASSA ABLOY Group company. All rights reserved.
Reproduction in whole or in part without the express written permission of Yale Security Inc. is prohibited.

8000 Series


Non Hold Open Door Closers — **Parallel Arm**

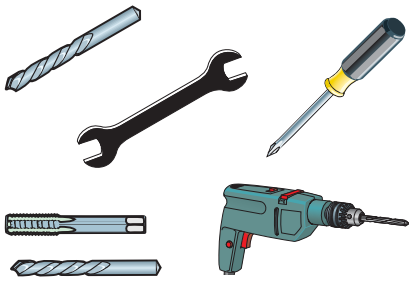

Metal



Wood



3/16"
* Pilot Hole Required

Self Drilling Screws Wood and Metal



For Wood drill 3/16 hole

Machine Screws



#7 Drill, 1/4-20 Tap

(Optional)

Sleeve Nut and Bolt




Drill 9/32 thru from Closer Side
3/8 Drill other side

Thru Bolt and Grommet Nut




Drill 9/32 thru from Closer Side
3/8 Drill other Side

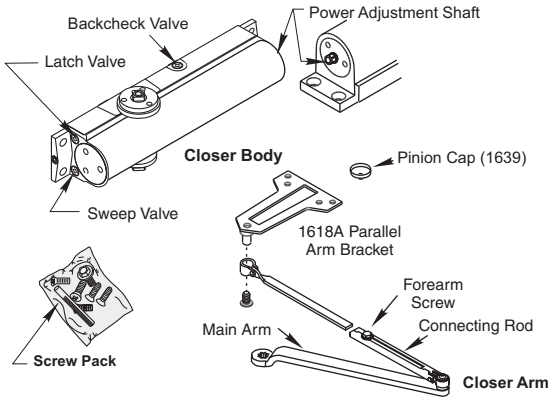





Narrow Cover
Standard With 8300 Series



Metal Cover
Standard With
8500M Series




Architectural Metal Cover
Standard With 8500MA Series



Full Cover
Standard With 8500 Series

NOTE: Architectural Cover CAN NOT be used for doors swinging over 120° using parallel mount.




Architectural Plastic Cover
Standard With 8500A Series

Mark and Drill Holes


This template for use with standard butt hinges or 3/4 offset pivots.
For all other hardware, please consult factory for template.


Opening	Dimension "A"	Dimension "B"
	Inches (mm)	
To 120°	9-1/2 (241.3)	3-3/4 (95.3)
121° to 180°*	7" (177.8)	1-1/4 (31.8)

*Door/Frame/Hardware/Wall conditions permitting.

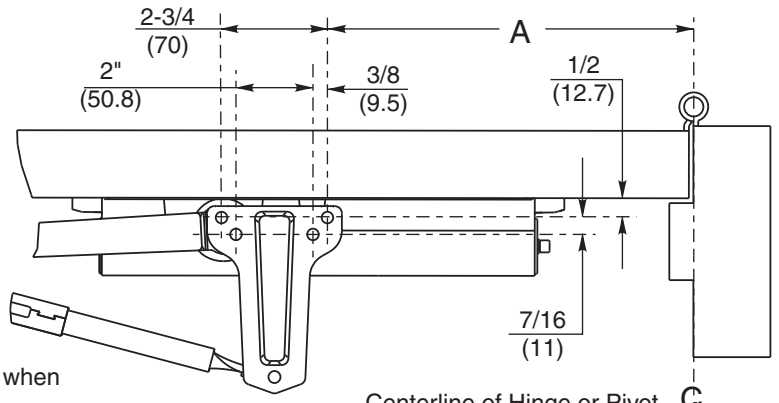

- Do not scale drawing.
- **Right hand door shown,** left hand opposite.
- Dimensions are in inches (mm).
- Hollow metal door require channel or box type reinforcement when through bolt mount is specified.
- Sex bolts required for wood or plastic faced fire door mounting.
- Minimum thickness recommended for reinforcements in hollow metal doors and frames: .146" (2.66mm) unless otherwise specified.
- Maximum width hinge for this template is 5" (127).

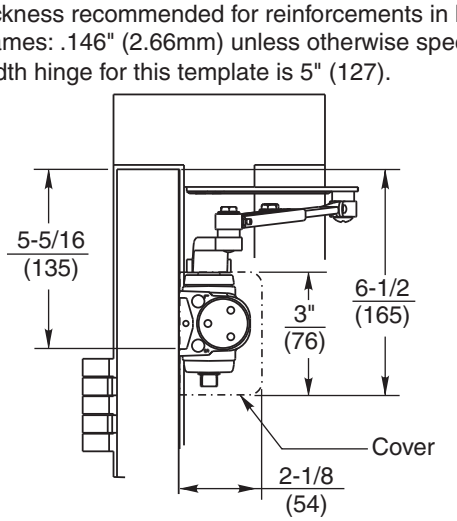

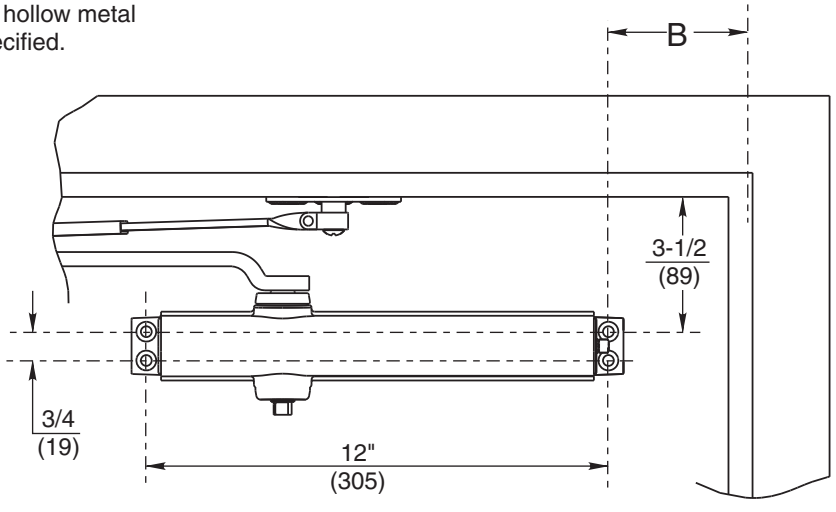

Copyright © 2004, 2014 Yale Security Inc., an ASSA ABLOY Group company. All rights reserved.
Reproduction in whole or in part without the express written permission of Yale Security Inc. is prohibited.

ASSA ABLOY, the global leader in door opening solutions

80-9380-2219-020 (09-14)

Installation Sequence

For Optional 8500M Cover, install clips before securing closer to door. (See Page 4)

2

3 **Remove forearm from connecting rod/main arm.**


Attach forearm to bracket.

4

1 **Close Valves**

Latch

Sweep

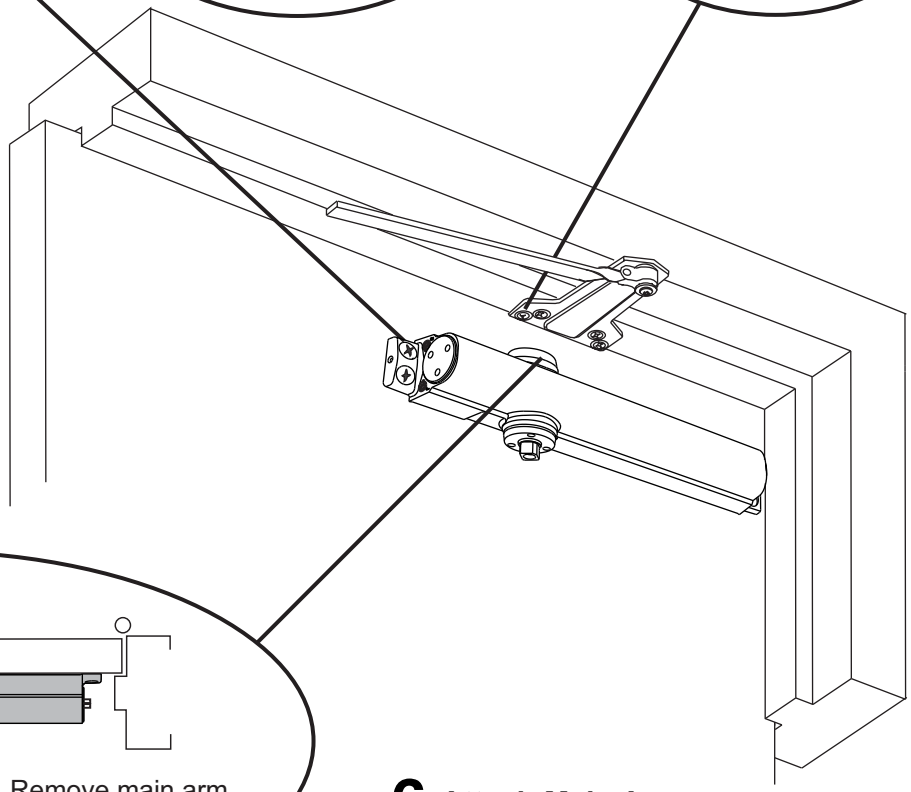

5 **Prep Closer For Arm To Be Parallel**

Place main arm on closer spindle.

Remove main arm from closer spindle.

Rotate

6 **Attach Main Arm**

Place main arm back on closer spindle ensuring flat is in correct position for hand of door.

Right Hand Door

or

Left Hand Door

Flat


Flat

Copyright © 2004, 2014 Yale Security Inc., an ASSA ABLOY Group company. All rights reserved.
Reproduction in whole or in part without the express written permission of Yale Security Inc. is prohibited.


8000 Series


Non Hold Open Door Closers — **Parallel Arm**

7 Open Valves

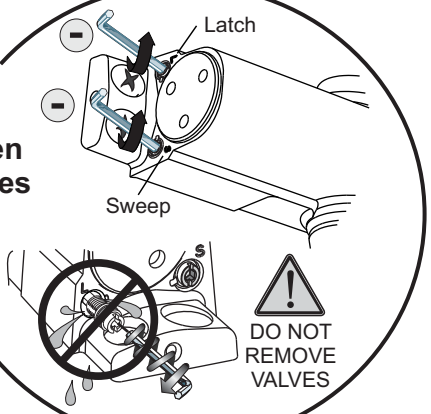


8 Attach forearm to connecting rod/main arm.

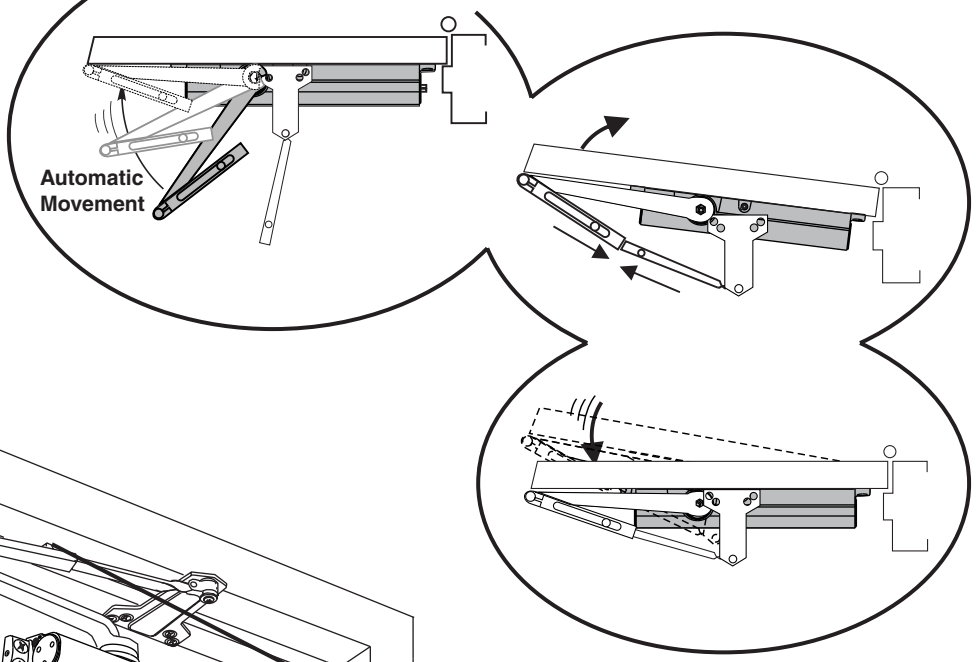

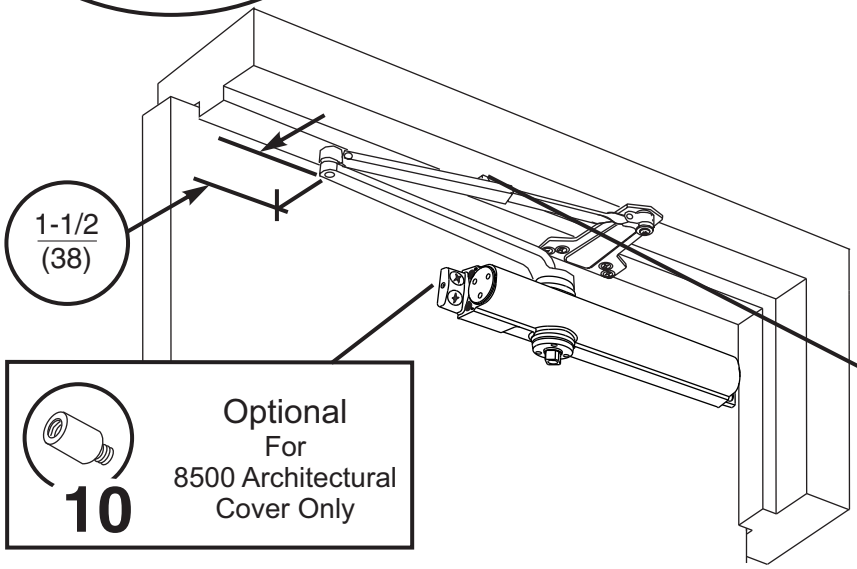


10

Optional
For
8500 Architectural
Cover Only

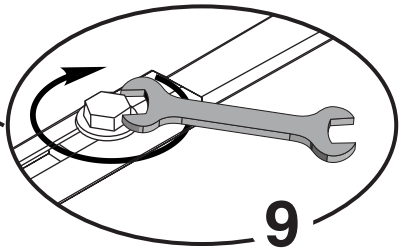


9

Check installation

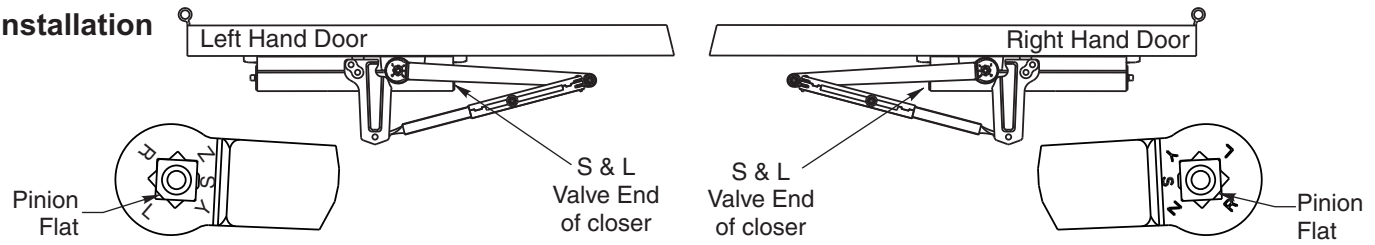


Pinion Cap or Optional Cover

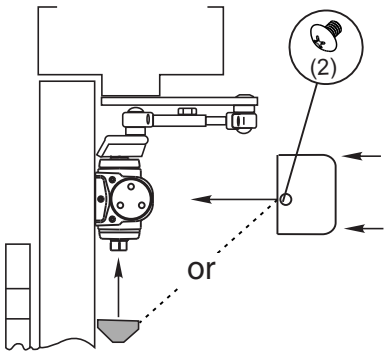

8300 Series

Screw pinion cap onto pinion shaft by hand or with a Phillips screw driver - DO NOT OVER TIGTHEN.


Optional 8500M Metal Cover Installation

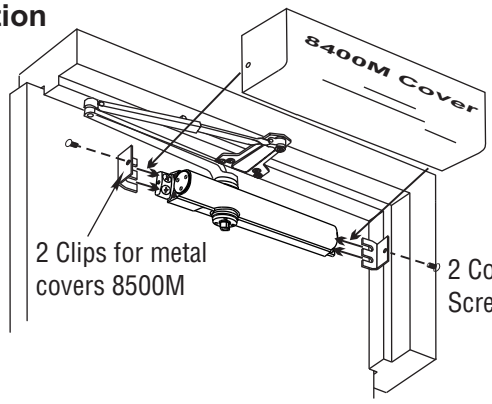

Copyright © 2004, 2014 Yale Security Inc., an ASSA ABLOY Group company. All rights reserved.
Reproduction in whole or in part without the express written permission of Yale Security Inc. is prohibited.

Norton
ASSA ABLOY

Spring Power Adjust



(Use 5/16” Socket or Adjustable Wrench for this Adjustment)


The closing force for series 8101, 8301 & 8501 door closers is adjustable from a size 1 to a size 6, as outlined in ANSI Standard A156.4. When these series of door closers are installed and adjusted to conform to ADA reduced opening force requirements (5 lbs max.) for interior doors, they may not have adequate closing force to reliably close and latch the door. Power adjustments charted on this page are recommended where possible, to ensure proper door control.

Adjustment Chart
Parallel Arm
P8101/P8301/P8501

DOOR	*	Number of Turns Required: MAXIMUM DOOR SIZE 32" (0.85M)	36" (0.90M)	42" (1.00M)	48" (1.20M)
INTERIOR	FULL 360° TURNS OF 5/16 POWER ADJUSTMENT WRENCH	7	10	13	16
EXTERIOR		9	12	15	18

*20 FULL (360°) TURNS MAXIMUM AVAILABLE
Closer is shipped set at mid range setting = 10 turns


By law the Americans with Disabilities Act (ADA) may require that door closer installation comply with accessability guidelines.

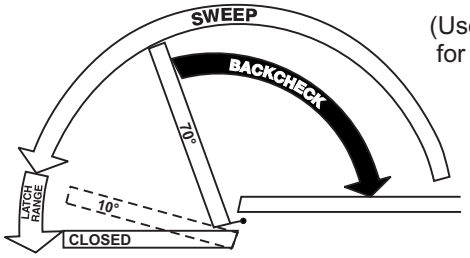


(Use 1/8" Hex Wrench for these Adjustments)

Adjust Closing Speed Time to between 3 to 7 seconds from 90°. Use of the door by handicapped, elderly or small children may require greater closing time.


Delayed Action (Optional)

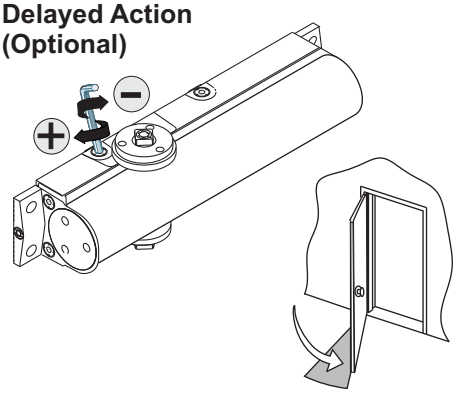


Sweep

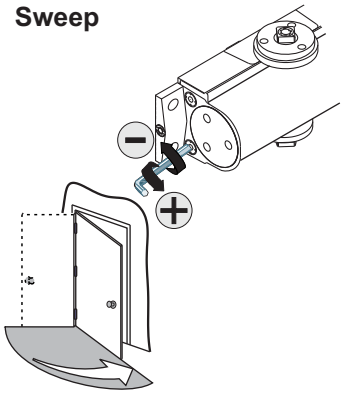


Latch

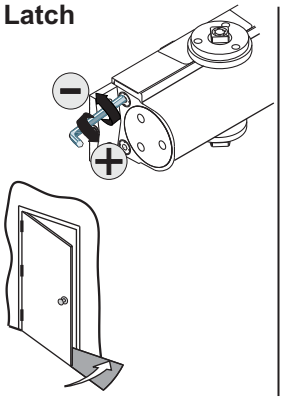

Backcheck

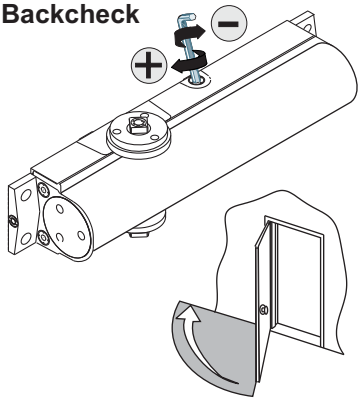

To Identify Date Code:

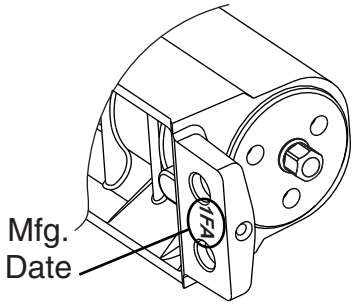

Copyright © 2004, 2014 Yale Security Inc., an ASSA ABLOY Group company. All rights reserved.
Reproduction in whole or in part without the express written permission of Yale Security Inc. is prohibited.

Norton
ASSA ABLOY
3000 Highway 74 East • Monroe, NC 28112
Tel: (877)-974-2255 • Fax: (800)-338-0965
www.nortondoorcontrols.com

Copyright © 2004, 2014 Yale Security Inc., an ASSA ABLOY Group company. All rights reserved.
Reproduction in whole or in part without the express written permission of Yale Security Inc. is prohibited.

ASSA ABLOY, the global leader in door opening solutions

80-9380-2219-020 (09-14)