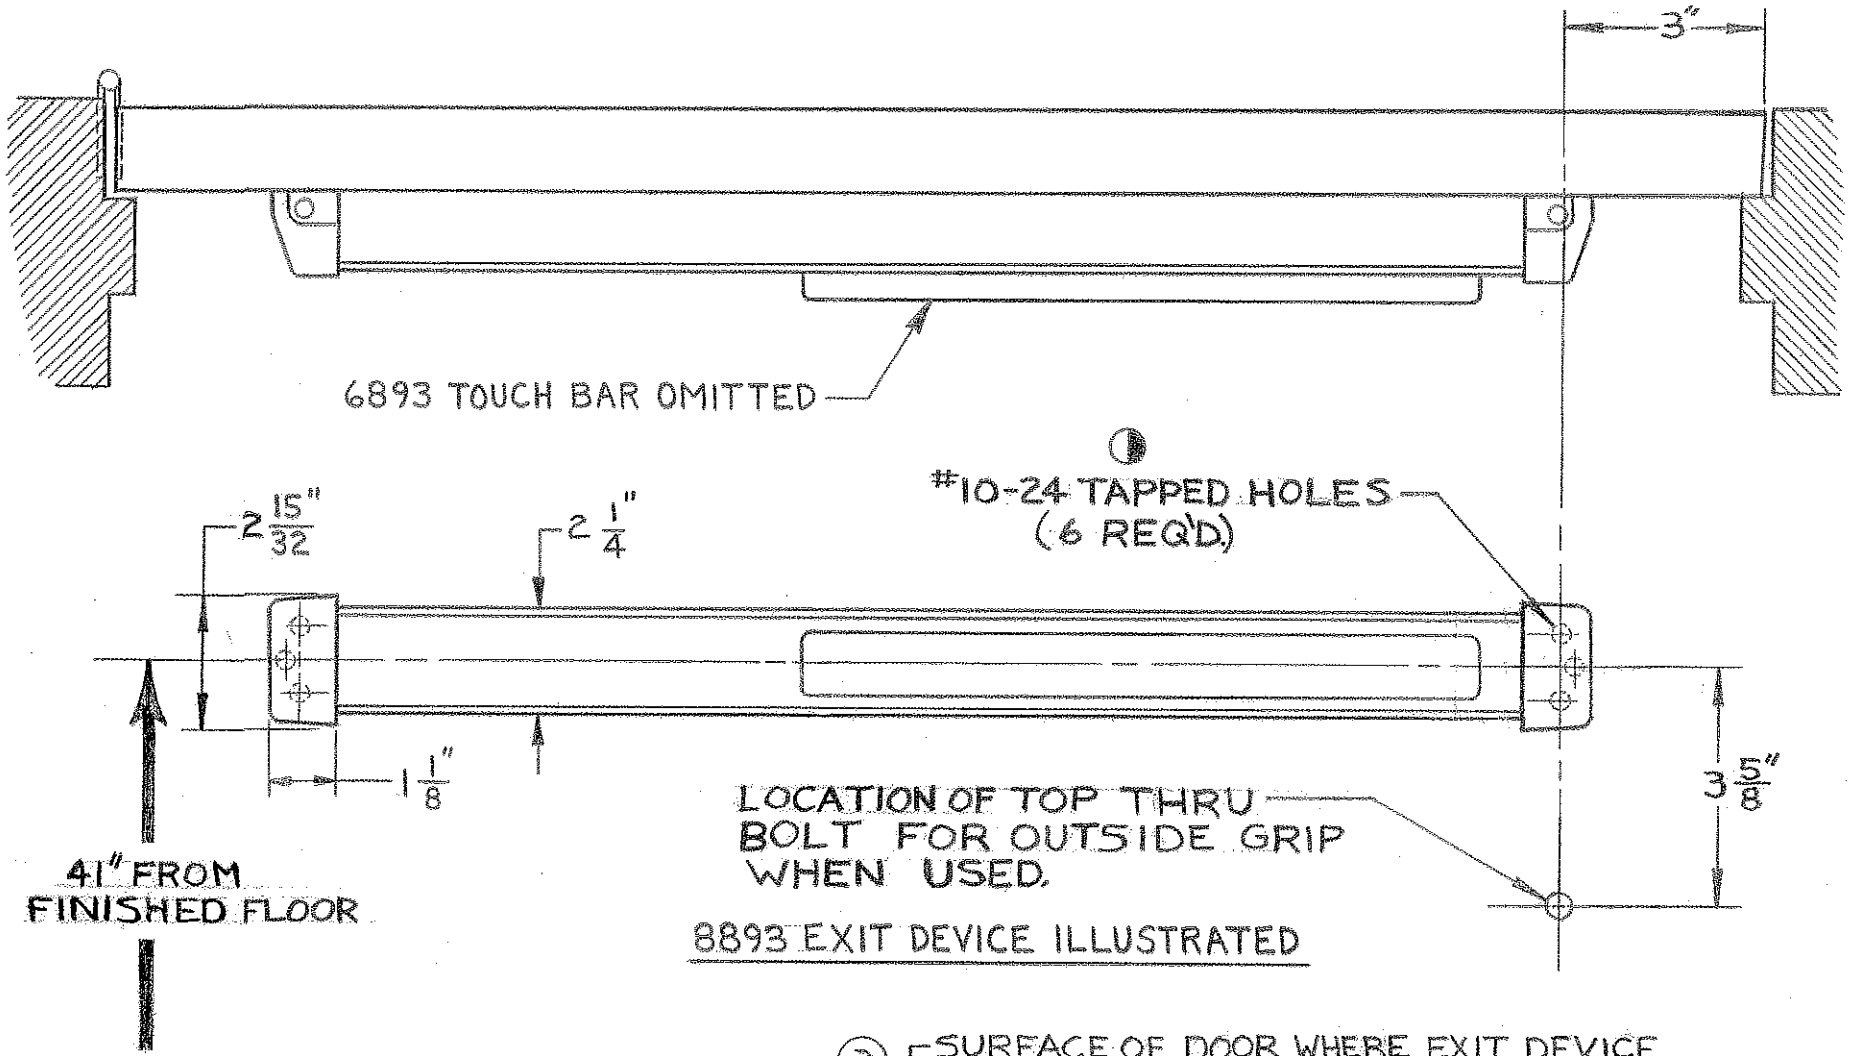


8893 EXIT DEVICE ILLUSTRATED

(2) ◑ LOCATE, DRILL AND TAP HOLES WHEN APPLYING HARDWARE TO DOOR.

(1) TOLERANCE ON ALL FRACTIONAL DIMENSIONS ±1/64".

(3) SURFACE OF DOOR WHERE EXIT DEVICE IS TO BE APPLIED, MUST BE FLUSH.

SARGENT & COMPANY — NEW HAVEN 9, CONN.

METAL DOOR TEMPLATE:
6893 & 8893 EXIT DEVICE
(INACTIVE TRIM)

RELEASE DATE:
16 DEC 87

TEMPLET NO.
4286 D