


Magnetic Lock Accessories

GDH Glass Door Holder


For 600 and 1200 lbs Magnetic Locks

- Size: 7-5/16" L x 1-3/8" W x 2-1/2" H
- Glass thickness: 1/2" – 5/8"
- Minimum clearance between top of door and door header: 13/64"
- Armature adjustment range: 1"
- Compression mounts armature on frameless glass doors
- Clear anodized (US28) standard finish

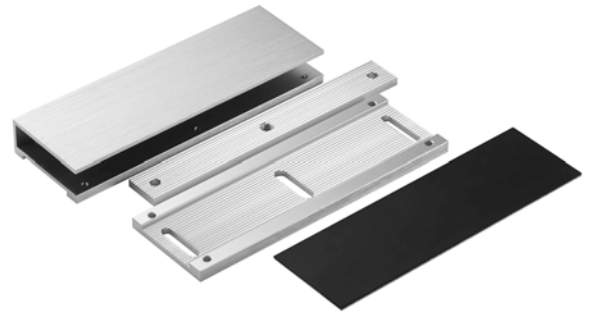

Filler Plates

- AM6360: 5/8" filler plate for all 600 and 1200 series magnetic locks
 - Size: AM6360: 10-1/2" L x 3/4" W x 5/8" Thick
- AM6361: 1/2" filler plate for all 600 and 1200 series magnetic locks
 - Size: AM6361: 10-1/2" L x 3/4" W x 1/2" Thick
- Clear Anodized (US28) standard finish

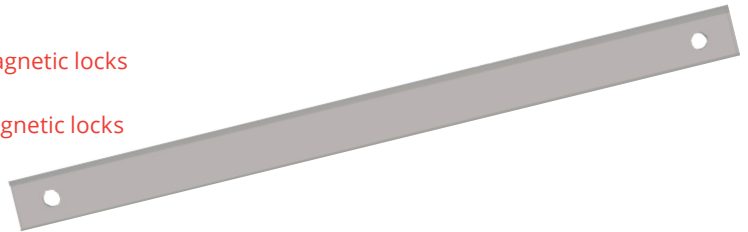

Installation Tools

- **DJ-1 Magnetic Lock Installation Drill Jig**
 - Designed for accurate and fast installation of magnetic locks
 - Compatible with: 600S, 600L, 600LB, 1200S, 1200L, 1200LB
 - 6" drill bit included
- **DB-1 Drill Bit**
 - 8.9MM Drill Bit for Installing Brass Rivet Nuts when mounting weather resistant locks

(Grey metal box shown; actual metal box is white)



Jack Nuts

Provide a reliable and secure method for mounting magnetic locks in metal door frames that are 3/16" thick or less. During installation the body of the jack nut collapses on the back side to form legs which grip the inside of the mounting surface.

- **JN-1 Jack Nut Tool Kit**
 - Jack nut tool kit includes the following: Jack nut installation tool, 25/64" drill bit, 5M mandrel installed in installation tool, 50-5M jack nuts, 50-5M x .75" flat head Phillips machine screws, 1 each of 3M, 4M and 6M mandrel, Metal tool box (holds all items)
 - **JN-50 Pack of 50 (also available separately)**

