
# Deadbolt functions

## ANSI A156.36 bored deadbolt locks

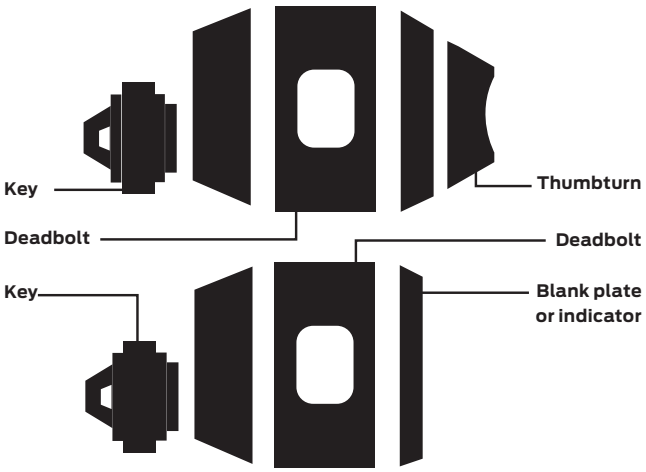


Standard cylinder.

FSIC - full size interchangeable core option.

SFIC - small format interchangeable core option.

Complies with ADA Accessibility Guidelines.


***Caution:**
Double cylinder locks on any door are a life safety hazard in times of emergency and their use is not recommended. Installation should be in accordance with existing codes only.

**ADA compliant:**
Schlage Lock Company offers a wide selection of locks designed to meet the Americans with Disabilities Act.

Schlage **B560P** ANSI **E0152**

### Single cylinder deadbolt


- Deadbolt thrown or retracted by key outside or thumbturn inside




Schlage **B561** ANSI **E0162**

### Cylinder only x blank plate deadbolt


- Deadbolt thrown or retracted by key outside
- Blank plate with exposed screws inside




Schlage **B562P*** ANSI **E0142**

### Double cylinder deadbolt


- Deadbolt thrown or retracted by key either side
- Not UL rated




Schlage **B563** ANSI **E0172**

### Classroom deadbolt


- Deadbolt thrown or retracted by key outside
- Inside units retracts bolt only




Schlage **B571** ANSI **-**

### Door bolt occupancy indicator


- Deadbolt thrown or retracted by thumbturn inside
- Outside indicator displays “In use” or “Vacant”
- Requires 1 ½" cross bore prep
- Not UL rated
- 61-509 Emergency key included




Schlage **B580** ANSI **E0192**

### Door bolt

- Deadbolt thrown or retracted by trim unit only
- Requires 1 ½" cross bore prep




Schlage **B581** ANSI **E01112**

### Door bolt with trim

- Deadbolt thrown or retracted by trim unit only
- Blank plate outside
- Requires 1 ½" cross bore prep

