Listed Components

CM-160/170/180

AUTOMATIC DOOR KEY SWITCHES



CM-160/23



CM-170/23



CM-180/24

FEATURES

- 3 FORMATS: JAMB, HEADER OR SINGLE GANG MOUNT
- 2, 3, OR 4 POSITION MAINTAINED AND 2 POSITION MOMENTARY MODELS
- VARIOUS LOGOS, AND LANGUAGES
- KEY REMOVABLE IN ALL MAINTAINED POSITIONS
- UL/CSA APPROVED SWITCH RATED 4 AMPS @ 28V DC

DESCRIPTION

Camden Door Controls CM-160/170/180 Series key switches are economical, automatic door controls. All key switches are keyed alike, and keys are removable in all maintained positions. The switches are UL/CSA approved, and rated 4 amps @ 28 VDC.

The CM-160 1 11/16" x 3" compact lamacoid faceplate is designed for easy installation directly in the aluminum jamb or operator header.


The CM-170 narrow stainless steel faceplate is 1 1/2" x 4 1/2", and is designed to mount in the aluminum jamb.

The CM-180 stainless faceplate is 2 3/4" x 4 1/2" and will fit on any standard electrical box, flush or surface.


APPLICATION

Camden automatic door key switches are designed to control automatic pedestrian & overhead doors.

They may also be used for shunting, bypassing alarms, request to exit, timed functions and many other applications. Camden key switches are versatile and can be supplied in various logos and languages to suit any commercial, industrial or residential application.

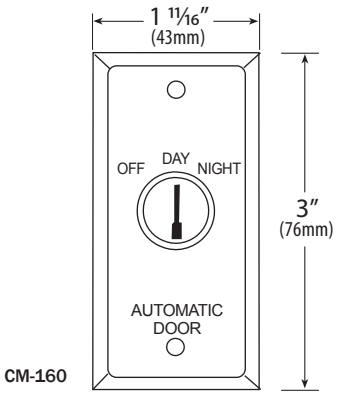

CM-160

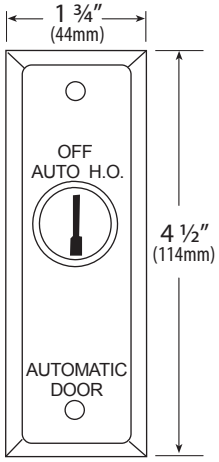

CM-170


Camden DOOR CONTROLS

5502 Timberlea Blvd. Mississauga, ON Canada L4W 2T7 • Toll Free: 1 877 226-3369 (CAMDEN9)
Tel: (905) 366-3377 • Fax: (905) 366-3378 • E-mail: info@camdencontrols.com • www.camdencontrols.com

ARCHITECTS/ENGINEERS SPECIFICATIONS

The key switches to be used throughout the site/complex shall be Camden Door Controls CM-160, 170, or 180 series key switches.

The switches shall all be keyed alike, with the key removable in all maintained positions. Faceplates shall be constructed of engraved plastic, or stainless steel with laser etched lettering. Switches shall be rated at a minimum of 4 amps @ 28V AC.

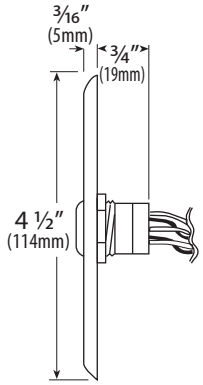


CM-170

ORDERING INFORMATION

All CM-160/170/180 series key switches are complete ready-to-install assemblies. They are supplied with mounting hardware, 2 keys and 6″ wire leads.

MODEL	DESCRIPTION
1 11/16" X 3" LAMACOID	
CM-160/20	OFF-OPEN MOMENTARY
CM-160/21	OFF-AUTO MAINTAINED
CM-160/22	OFF-AUTO-HOLD OPEN MAINTAINED
CM-160/23	OFF-DAY-NIGHT MAINTAINED
CM-160/24	OFF-EXIT-AUTO-HOLD OPEN MAINTAINED
1 1/2" X 4 1/2" NARROW STAINLESS	
CM-170/20	OFF-OPEN MOMENTARY
CM-170/21	OFF-AUTO MAINTAINED
CM-170/22	OFF-AUTO-HOLD OPEN MAINTAINED
CM-170/23	OFF-DAY-NIGHT MAINTAINED
CM-170/24	OFF-EXIT-AUTO-HOLD OPEN MAINTAINED
2 3/4" X 4 1/2" SINGLE GANG STAINLESS	
CM-180/20	OFF-OPEN MOMENTARY
CM-180/21	OFF-AUTO MAINTAINED
CM-180/22	OFF-AUTO-HOLD OPEN MAINTAINED
CM-180/23	OFF-DAY-NIGHT MAINTAINED
CM-160/24	OFF-EXIT-AUTO-HOLD OPEN MAINTAINED
CM-A126	2 KEYS FOR KEY SWITCHES

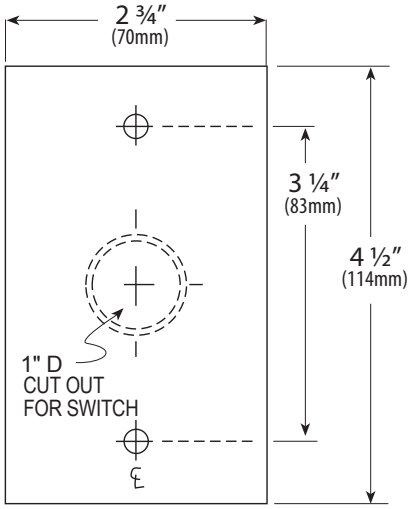

CM-180

Camden DOOR CONTROLS
5502 Timberlea Blvd. Mississauga, ON Canada L4W 2T7 • Toll Free: 1 877 226-3369 (CAMDEN9)
Tel: (905) 366-3377 • Fax: (905) 366-3378 • E-mail: info@camdencontrols.com • www.camdencontrols.com
LIT-SP-KYSWTCHR1
BSI FS 541752 Certified ISO 9001: 2008