

CONTACT ARRANGEMENT




Pos 1
OFF



Pos 2
OPEN

→

ARROW INDICATES CONTACT CLOSURE

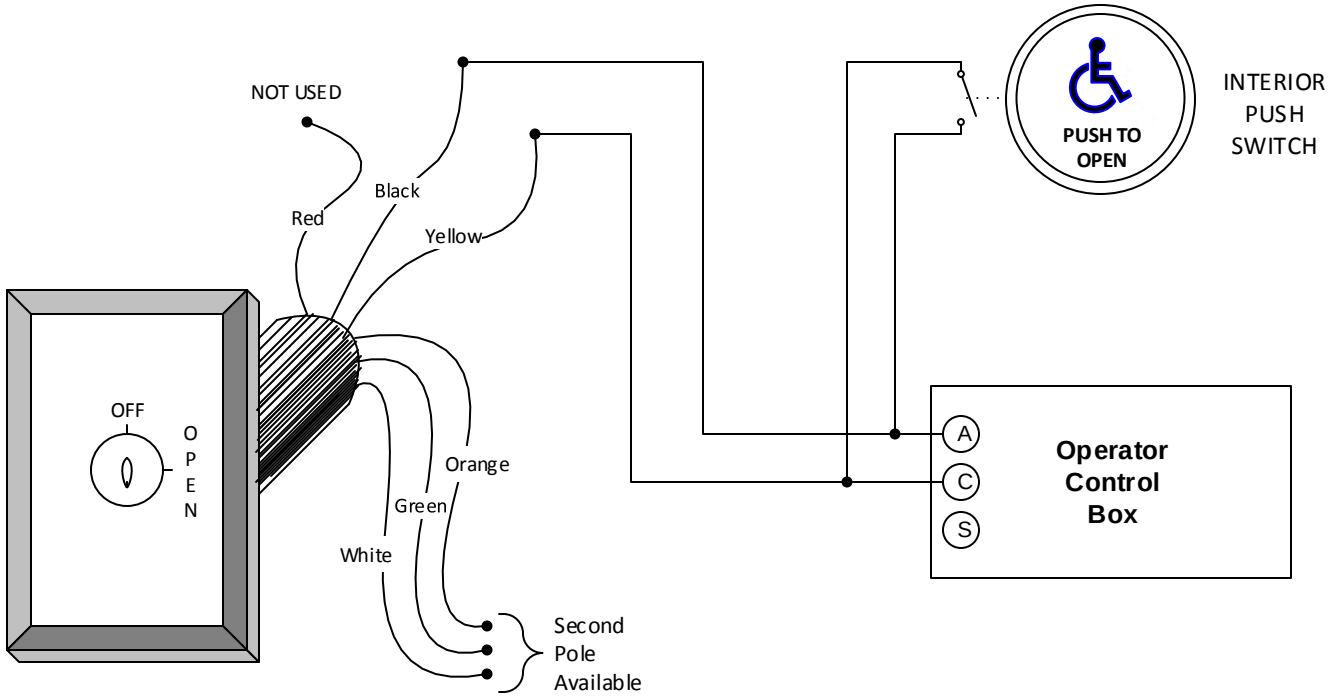

TYPICAL WIRING DIAGRAM

AUTOMATIC SWING DOOR

SPECIFICATIONS

- Contact Rating : 4 amps @ 125VAC
- 4 Tumbler Lock
- All locks keyed alike
- Key removable in *OFF* only
- Switch Depth: 1 1/4"
- Frame hole diameter: 1 1/8" min.

Camden Door Controls

5502 Timberlea Blvd.
Mississauga, ON
L4W 2T7

SCALE: NONE	DRAWN BY: DGW	DATE: 05/16/03	REVISED: 10/06/14

Two Position Momentary Keyswitch (CM-160/170/180 -20)

DRAWING No: 40-82B031	FILENAME: CM_160_20.vsd