
COMMAND ACCESS
TECHNOLOGIES

ELECTRIFIED CYLINDRICAL

CL1 Series

(Command Access Complete Lock)

- UL Listed
- Grade 1
- 12 or 24 VDC
- Low Current Draw
- 3-Year Warranty

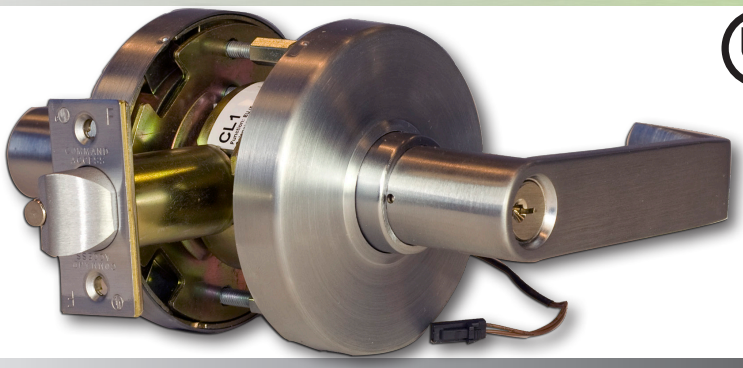

The **Command Access CL1** is a high quality grade 1 cylindrical lock with the look and feel our customers have come to expect from leading brands, but at a significantly lower price. The CL1 is an ideal solution for that project where a "brand name" electrified product is not specified or required yet a high quality and economical solution is desired. You can install this lock with the confidence of knowing that the CL1 meets or exceeds the high standards of our other grade 1 modifications and carries the same no hassle 3-year warranty.

Models Available

CL180EL - storeroom: (fail safe)
Outside lever locked (EL) electronically. Latchbolt retracted by key outside or lever inside. Switched power allows outside lever to retract latchbolt. Inside lever is always free for immediate egress.

CL180EU - storeroom: (fail secure)
Outside lever unlocked (EU) electronically. Latchbolt retracted by key outside or lever inside. Switched power allows outside lever to retract latchbolt. Inside lever is always free for immediate egress.

Finishes Available

612, 613, 625 & 626

Trim Available



L6, L7, L17

FEATURES:

- Continuous duty solenoids allow for "continuously on" applications such as Fail Safe or an unlock cycle
- Plug-in bridge rectifier that allows for an AC or DC power source
- Low current draw Clutching lever design
- Available SFIC
- Available with Schlage C type keyway standard
- No hassle 3-Year Warranty

OPTIONS:

- Available Fail Safe (Electrically Locked) or Fail Secure (Electrically Unlocked)
- Voltage options - 12V or 24V (AC/DC)
- REX - Request to Exit or AE switch available (on all functions)
- CRU2 - Current Reduction Unit to improve solenoid life in "continuously on" applications

SPECIFICATIONS:

- Operating Voltage - 12 or 24VAC/DC (+or- 10%) (must specify 12 or 24 volts when ordering)
- Amperage - 12V = 250 mA / 24V = 150 mA
- Power consumption - 3 watts
- Solenoid coil resistance - 12V = 49 Ω / 24V = 159 Ω

U.S. Customer Support
1-888-622-2377

Visit our website for more details
www.CommandAccess.com

Canada Customer Support
1-855-823-3002

Command Access is not a licensee, or affiliated, associated or connected with Allegion, Assa Abloy, Stanley, Schlage, Falcon, Von Duprin, Dorma, Sargent, Corbin Russwin, Yale, Emtek, Adams Rite, Best, Precision, Arrow, Design Hardware, Cal Royal, Jackson, AHT, Marshall Best, Marks, Accurate, Baldwin, FSB, PDQ, Lawrence, Trans Atlantic, Hager, LSDA, General Lock, or Omnia or any of their subsidiaries or affiliates.

#20323_A