

Installation Instructions


Corbin Russwin
ASSA ABLOY

(Flush or Overlapping) for doors with glass bead


PED5000 Series Exit Device with Shim Kit

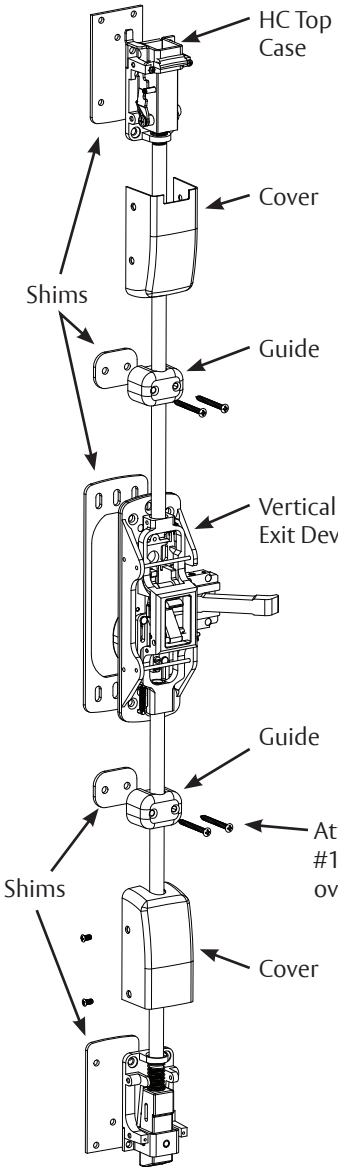





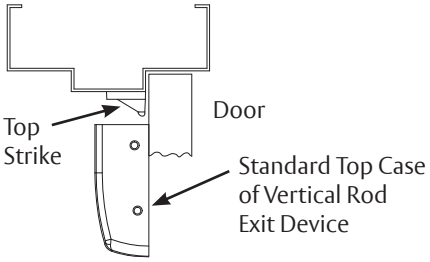

1. Place shim plates under the exit device as illustrated (1/4" Max - not to exceed 2 plates).
2. Use screws provided in the screw pack to attach the exit device and shims to the door.

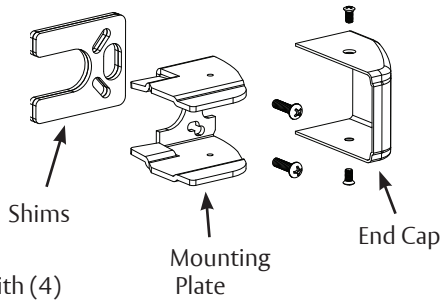

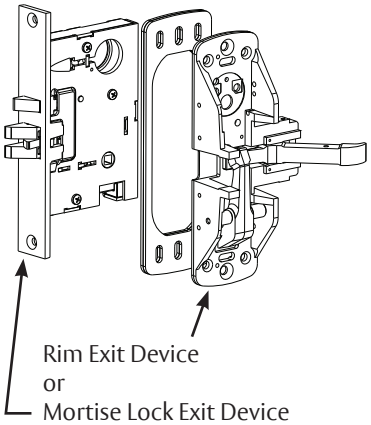

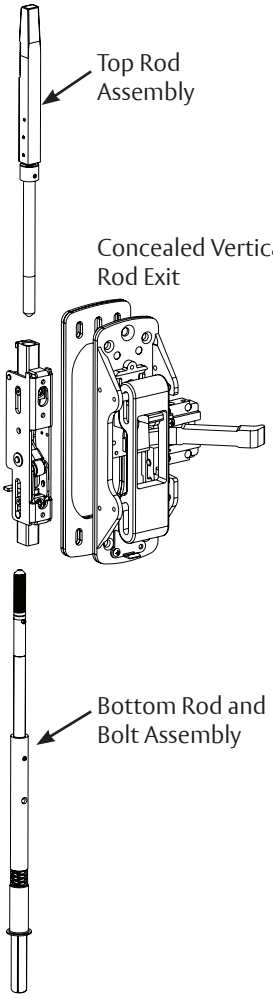

⚠ WARNING

This product can expose you to lead which is known to the state of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65warnings.ca.gov.

For installation assistance contact Corbin Russwin
1-800-543-3658 • techsupport.corbinrusswin@assaabloy.com

FM624 01/23

Experience a safer and more open world

Copyright © 2023, ASSA ABLOY Access and Egress Hardware Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Access and Egress Hardware Group, Inc. is prohibited.