

DS9360 Panoramic TriTech Detector

www.boschsecurity.com



BOSCH
Invented for life



- ▶ Motion Analyzer II processing
- ▶ Microwave adaptive processing
- ▶ Self-test supervision systems
- ▶ Changeable mirrors (two mirrors provided)

The ceiling mount panoramic DS9360 TriTech® PIR/Microwave Detector uses several patented processing techniques to provide excellent catch performance with freedom from false alarm. Supervised microwave and PIR sections ensure that the detector is working properly. Field replaceable mirrored optics allows it to be mounted on ceilings from 2.4 m to 5.5 m (8 ft to 18 ft) in height.

Functions

Signal Processing

Uses passive infrared and microwave technologies to provide an alarm condition when both fields of protection are simultaneously activated. Alarm signals must meet the signaling requirements of both technologies to activate an alarm. Adjustable PIR and microwave sensitivity.

PIR Signal Processing

Motion Analyzer II uses multiple thresholds and timing windows to analyze timing, amplitude, duration and polarity of signals to make an alarm decision. Will not alarm on extreme levels of thermal and illumination disturbances caused by heaters and air conditioners, hot and cold drafts, sunlight, lightning, and moving headlights. Two sensitivity settings are provided.

Microwave Signal Processing

Adaptive processing adjusts to background disturbances. This helps to reduce false alarms while maintaining catch performance.

Test Features

Two high output tri-color alarm LEDs visible from any angle, and flash to indicate a trouble condition.

Certifications and approvals

This detector has been designed to also comply with the requirements of:


Europe Complies with EN50131-1, Grade 2

| Region | Certification | |
|-----------|---------------|--|
| Australia | RCM | DS9360 |
| Europe | CE | EMC, LVD, R&TTE, RoHS [DS9360] |
| | EN50131 | EN50131-2-4, Grade 2 DS9360 |
| Belgium | INCERT | B-509-0049_b_PIR+MW DS9360 |
| USA | UL | ANSR: Intrusion Detection Units (UL639) DS9360 |
| | FCC | ESV9360 DS9360 |


| Region | Certification | |
|-----------|---------------|-------------------------|
| France | AFNOR | 2820200006A0 DS9360 |
| Brazil | ANATEL | 0868-03-1855 DS9360 |
| Singapore | iDA | LPREQ-S0153-2004 DS9360 |

Installation/configuration notes

Coverage Patterns

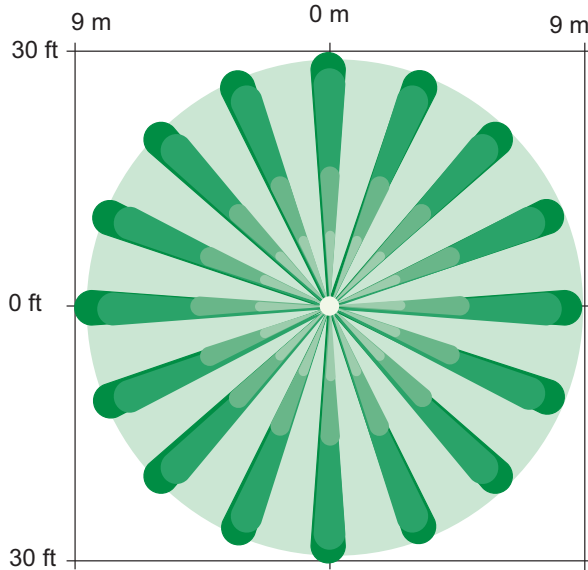

Top view
360° x 18 m (60 ft) diameter

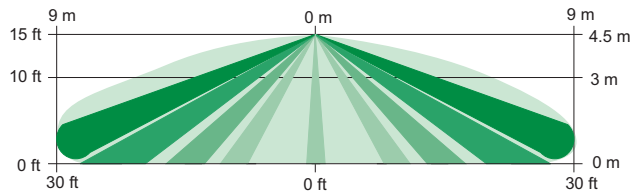

AR13-18 Side view

Selecting a Mirror

Two types of mirrors (AR8-13, AR13-18) are shipped with the product to accommodate different ceiling heights.

Mirror type and ceiling height

| | |
|---------|-------------------------------|
| AR8-13 | 2.4 m – 4.0 m (8 ft – 13 ft) |
| AR13-18 | 4.0 m – 5.5 m (13 ft – 18 ft) |

Parts included

| Quantity | Component |
|----------|---------------------------|
| 1 | Detector |
| 1 | B334 Swivel Mount Bracket |

| Quantity | Component |
|----------|--|
| 1 | Standard Broad Coverage Mirror, labeled OA90 |
| 1 | Long Range Coverage Mirror, labeled OA300 |

Technical specifications

Enclosure Design

| | |
|-------------|---|
| Design: | Modular high impact ABS electronic head and mounting/wiring base design with rugged polyethylene dome provides easy access to field setup switches. |
| Dimensions: | 8.5 cm x 13.3 cm (3.5 in. x 5.25 in.) |
| Material: | High impact ABS plastic enclosure |

Environmental Considerations

| | |
|--|--|
| Operating Temperature: | -40°C to +49°C (-40°F to +120°F) <i>For UL Certificated installations, 0°C to +49°C (+32°F to +120°F)</i> |
| Radio Frequency Interference (RFI) Immunity: | No alarm or setup on critical frequencies in the range from 26 MHz to 950 MHz at 50 V/m. |

Complies with Environmental Class II (EN50130-5)

Mounting

| | |
|---------------|---|
| Height Range: | 2.4 m to 5.5 m (8 ft to 18 ft) recommended |
| Location: | Mounts directly to ceiling or to standard 10.2 cm (4 in.) octagonal electrical box. |

Outputs

| | |
|---------|--|
| Alarm: | Form C reed relay rated at 3.0 W, 125 mA at 28 VDC for resistive loads. |
| Tamper: | Normally-closed (with cover in place) tamper switch. Contacts rated at 28 VDC, 125 mA maximum. |

Power Requirements

| | |
|----------|-------------------------------|
| Current: | 18 mA standby; 75 mA in alarm |
| Voltage: | 6 VDC to 15 VDC |

Trademarks

TriTech® is a registered trademark of Bosch Security Systems, Inc. in the United States.

Ordering information

DS9360 Panoramic TriTech Detector

Provides PIR and microwave, 360° x 18 m (60 ft) diameter coverage, and 2.4 m to 5.5 m (8 ft to 18 ft) mounting height.

Order number **DS9360**

Represented by:

Europe, Middle East, Africa:
Bosch Security Systems B.V.
P.O. Box 80002
5600 JB Eindhoven, The Netherlands
Phone: + 31 40 2577 284
emea.securitysystems@bosch.com
emea.boschsecurity.com

Germany:
Bosch Sicherheitssysteme GmbH
Robert-Bosch-Ring 5
85630 Grasbrunn
Germany
www.boschsecurity.com

North America:
Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
onlinehelp@us.bosch.com
www.boschsecurity.us

Asia-Pacific:
Robert Bosch (SEA) Pte Ltd, Security Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6571 2808
Fax: +65 6571 2699
apr.securitysystems@bosch.com
www.boschsecurity.asia