ASSA ABLOY
Opening Solutions

Electric Strike Overview

Electric Strikes for every type of lockset application

ELECTRONIC SECURITY HARDWARE HES | SECURITRON | **ACCESSORIES**

Experience a safer and more open world










Works with Cylindrical & Mortise Locksets with or without a 1" Deadbolt

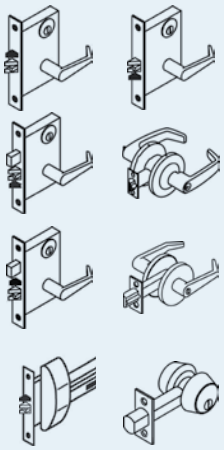


Compatible with all manufacturers

HES 1600CS

Dynamic, low profile design with integrated adjustability and field configurable options

.24 Amps at 12 VDC/VAC | .12 Amps at 24 VDC/VAC
DC continuous duty | AC intermittent duty only



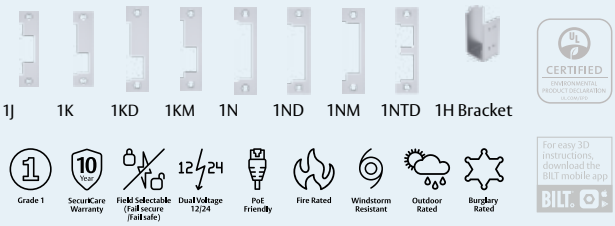


HES 1006CS

Strongest design with SMART Pac® III in-line power controller

.45 Amps at 12 VDC | .25 Amps at 24 VDC







Works with Cylindrical & Mortise Locksets for an ANSI 4-7/8" Strike Plate with a 1" Deadbolt




HES 1600CDB

Dynamic, low profile design with integrated adjustability and field configurable options for deadbolt applications

.24 Amps at 12 VDC/VAC | .12 Amps at 24 VDC/VAC
DC continuous duty | AC intermittent duty only














HES 1006CDB


Strongest design for deadbolt applications

.45 Amps at 12 VDC | .25 Amps at 24 VDC









Compatible with all manufacturers


HES 1006CAS

Strongest design for deadbolt recapture applications


.45 Amps at 12 VDC | .25 Amps at 24 VDC







Works with Cylindrical & Mortise Locksets for an ANSI 4-7/8" Strike Plate with a 3/4" Latchbolt



HES 1600CLB

Dynamic, low profile design with integrated adjustability and field configurable options for latchbolt applications

.24 Amps at 12 VDC/VAC | .12 Amps at 24 VDC/VAC
DC continuous duty | AC intermittent duty only











Compatible with all manufacturers


HES 1006CLB


Strongest design for latchbolt applications

.45 Amps at 12 VDC | .25 Amps at 24 VDC
DC continuous duty | AC intermittent duty only









Compatible with all manufacturers


HES 1500C

Heavy duty low profile design for latchbolt applications

.24 Amps at 12 VDC/VAC | .12 Amps at 24 VDC/VAC
DC continuous duty | AC intermittent duty only














Compatible with most manufacturers




See installation instructions for Schlage and Yale 8700


HES 4500C

Low profile design for installation in 2" UL 10C fire-rated frames with 1/2" drywall penetration


.24 Amps at 12 VDC/VAC | .12 Amps at 24 VDC/VAC
DC continuous duty | AC intermittent duty only







Works with Cylindrical & Mortise Locksets without a Deadbolt, 1/2", 5/8", 3/4" Throw Latchbolt



Single door, fail secure only. Hollow metal frame applications


HES Folger Adam 742-75

Fire-rated industrial grade electric strike designed for heavy duty applications

.29 Amps at 12 VDC | .15 Amps at 24 VDC








Single and double door, fail secure only

HES Folger Adam 310-1-(X)


3 hour fire rated, industrial grade, designed for extreme heavy duty applications

.51 Amps at 12 VDC | .25 Amps at 24 VDC





Works with Cylindrical & Mortise Locksets without a Deadbolt 3/4" Throw Latchbolt



Compatible with most manufacturers

HES Folger Adam 310-2-3/4

Fire-rated industrial grade electric strike designed for heavy duty applications

.51 Amps at 12 VDC | .25 Amps at 24 VDC



Grade 1 · 5 Year SecuriCare Warranty · Fire Rated · Burglary Rated

Works with Mortise Locksets without a Deadbolt up to 3/4" Throw Latchbolt

Sargent 8100, 8200, 9200 » 851M Model

Corbin Russwin ML 2000 » 852K Model

Schlage L9000 » 852L Model

Yale 8700 (made before 2005) & 8800, Accurate, Falcon, Kaba Ilco/Unican » 852M Model

HES 8500


Concealed design for easy installation with minimal modification to the frame

.24 Amps at 12 VDC/VAC | .12 Amps at 24 VDC/VAC
DC continuous duty | AC intermittent duty only



Grade 1 · 5 Year SecuriCare Warranty · Field Selectable (Fail secure / Fail safe) · 12/24 Auto Sensing Dual Voltage 12/24 · PoE Friendly · Outdoor Rated · Burglary Rated · Fire Rated

< Shown with 852L Faceplate




Securitron MUNL

No cut motorized electric strike capable of releasing under preload conditions with lock monitoring



Grade 1 · 5 Year SecuriCare Warranty · Fire Rated · Windstorm Resistant · Preload

Works with Cylindrical Locksets up to a 3/4" Throw Latchbolt




Compatible with most manufacturers

HES 5200C

In-frame horizontal adjustable design

.24 Amps at 12 VDC/VAC | .12 Amps at 24 VDC/VAC
DC continuous duty | AC intermittent duty only





501 501A

Grade 1 · 5 Year SecuriCare Warranty · Specialty Locksets · Field Selectable (Fail secure / Fail safe) · 12/24 Dual Voltage 12/24 · PoE Friendly · Burglary Rated

HES 7501

Designed for fire-rated applications with pre-load conditions

.45 Amps at 12 VDC | .25 Amps at 24 VDC



Grade 1 · 5 Year SecuriCare Warranty · Field Selectable (Fail secure / Fail safe) · 12/24 Dual Voltage 12/24 · Fire Rated · Preload · Burglary Rated


Works with Cylindrical Locksets up to a 5/8" Throw Latchbolt

HES 5000C

Low profile, compact design for easy installation

.24 Amps at 12 VDC/VAC | .12 Amps at 24 VDC/VAC
DC continuous duty | AC intermittent duty only





Grade 1 | SecuriCare Warranty | Field Selectable (Fail secure /Fail safe) | Dual Voltage 12/24 | PoE Friendly | Outdoor Rated | Burglary Rated


HES 7000C

Designed to address pre-loaded doors, and with in-frame horizontal adjustability

.45 Amps at 12 VDC | .25 Amps at 24 VDC

Also compatible with certain rim exit devices






Grade 1 | SecuriCare Warranty | Field Selectable (Fail secure /Fail safe) | Dual Voltage 12/24 | Preload | Burglary Rated

HES 8000C

Concealed design for easy installation with no cutting on the frame required and with vertical alignment adjustability

.24 Amps at 12 VDC/VAC | .12 Amps at 24 VDC/VAC
DC continuous duty | AC intermittent duty only






Grade 1 | SecuriCare Warranty | Field Selectable (Fail secure /Fail safe) | Dual Voltage 12/24 | PoE Friendly | Outdoor Rated | Burglary Rated

HES 8300C


Concealed, fire-rated design for easy installation with no cutting on the frame required and with vertical alignment adjustability

.24 Amps at 12 VDC/VAC | .12 Amps at 24 VDC/VAC
DC continuous duty | AC intermittent duty only





Grade 1 | SecuriCare Warranty | Field Selectable (Fail secure /Fail safe) | Dual Voltage 12/24 | PoE Friendly | Fire Rated | Outdoor Rated | Burglary Rated



Compatible with most manufacturers

Securitron UNL

No cut motorized electric strike capable of releasing under preload conditions



Grade 1 | SecuriCare Warranty | Fire Rated | Windstorm Resistant | Preload

HES Folger Adam 310-2

3 hour fire-rated industrial grade electric strike designed for extreme heavy duty applications

.51 Amps at 12 VDC | .25 Amps at 24 VDC



Grade 1 | SecuriCare Warranty | Fire Rated | Burglary Rated

HES Folger Adam 712

For use with 1/2" to 5/8" latchbolts on hollow metal frame applications

.29 Amps at 12 VDC | .15 Amps at 24 VDC

Also available as a 3/4" latchbolt variant



Grade 1 | SecuriCare Warranty | Fire Rated | PoE Friendly | Burglary Rated

HES Folger Adam 732

For use with 1/2" to 5/8" throw latchbolts on wood frame applications

.29 Amps at 12 VDC | .15 Amps at 24 VDC

Also available as a 3/4" latchbolt variant



Grade 1 | SecuriCare Warranty | Fire Rated | PoE Friendly | Burglary Rated

Works with Rim Exit Devices up to 1/2" Throw Latchbolt



Compatible with most manufacturers

HES 9400

Slim-line surface mounted design for easy installation

.45 Amps at 12 VDC | .25 Amps at 24 VDC



Grade 1 | SecuriCare Warranty | Field Selectable (Fail secure /Fail safe) | Dual Voltage 12/24 | Outdoor Rated | Burglary Rated

Works with Rim Exit Devices up to 3/4" Pullman Latchbolt



Compatible with most manufacturers

HES 7000

Designed to address pre-load doors, and with in-frame horizontal adjustability

.45 Amps at 12 VDC | .25 Amps at 24 VDC



Grade 1 | SecuriCare Warranty | Field Selectable (Fail secure /Fail safe) | Dual Voltage 12/24 | Preload | Burglary Rated

Shown with 789S faceplate

HES 9500

Fire-rated surface mounted design for easy installation

.45 Amps at 12 VDC | .25 Amps at 24 VDC



Grade 1 | SecuriCare Warranty | Field Selectable (Fail secure /Fail safe) | Dual Voltage 12/24 | Fire Rated | Outdoor Rated | Burglary Rated

HES 9600

Windstorm resistant, surface mounted design for easy installation

.45 Amps at 12 VDC | .25 Amps at 24 VDC



Grade 1 | SecuriCare Warranty | Field Selectable (Fail secure /Fail safe) | Dual Voltage 12/24 | Windstorm Resistant | Outdoor Rated | Burglary Rated

HES Folger Adam 310-4


Fire-rated surface industrial grade electric strike designed for extreme heavy duty applications

.51 Amps at 12 VDC | .25 Amps at 24 VDC



Grade 1 | SecuriCare Warranty | Fire Rated | Burglary Rated

Works with Rim Exit Devices with SquareBolts



Corbin Russwin SecureBolt® and Yale SquareBolt®

HES 9700


Windstorm resistant and fire-rated, surface mounted design for SquareBolt applications

.45 Amps at 12 VDC | .25 Amps at 24 VDC



Grade 1 | SecuriCare Warranty | Field Selectable (Fail secure /Fail safe) | Dual Voltage 12/24 | Fire Rated | Windstorm Resistant | Outdoor Rated | Burglary Rated

Works with Rim Exit Devices with Adams Rite® Starwheel or Interlocking Latchbolt



HES 9800

Outdoor-rated, surface mounted design for Adams Rite Starwheel and Interlocking Rim Exit Devices

.45 Amps at 12 VDC | .25 Amps at 24 VDC



Grade 1 | SecuriCare Warranty | Field Selectable (Fail secure /Fail safe) | Dual Voltage 12/24 | Outdoor Rated | Burglary Rated

Accessories

2005M3 SMART Pac® III



In-line power controller able to receive input voltages from 12 – 32 VAC or DC. Built-in bridge rectifier. Reduces initial voltage by 25% to extend the life of the electric strike Includes built-in resettable fuse, MOV, voltage regulation and input voltage level indicating and unit status. For use with 1006, input voltage must be DC.

10 Year
SecuriCare Warranty

When installed with a Smart Pac® III, HES, Folger Adam and Securitron Electric Strikes are upgraded to the SecuriCare no-fault 10-year Warranty.

NOTE: All ASSA ABLOY Electronic Security Hardware electric strikes are covered by the exclusive SecuriCare five-year, no-fault warranty.



HES 9000-MTK Metal Template Kit

For installing the 9400, 9500, 9600, 9700 and 9800 electric strikes



HESCUT-MTK Metal Template Kit

For installing the 1500, 1600, 1006, 4500, 5000, 5200, 7000 and 7501 electric strikes (4-7/8" ANSI jamb preparation only)



2004M Electrolynx® Adapter

Adapter between existing HES electric strikes and ElectroLynx® connectors







The ASSA ABLOY Group is the global leader in access solutions. Every day, we help billions of people experience a more open world.

ASSA ABLOY Opening Solutions leads the development within door openings and products for access solutions in homes, businesses and institutions. Our offering includes doors, frames, door and window hardware, locks, perimeter fencing, access control and service.

ASSA ABLOY
Opening Solutions



ELECTRONIC SECURITY HARDWARE

HES | Securitron

USA

80 626 7590 | F. 866 582 4641 | assaabloyesh.com

customerservice.esh@assaabloy.com | techsupport.esh@assaabloy.com | orders.esh@assaabloy.com

CANADA

800 461 3007 | assaabloydss.ca

sales.dss.ca@assaabloy.com | orders.dss.ca@assaabloy.com

Connect with ASSA ABLOY Electronic Security Hardware

@assaabloyesh ASSA ABLOY Electronic Security Hardware

Patent pending and/or patent www.assaabloydss.com/patents

Copyright © 2019, Hanchett Entry Systems, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of Hanchett Entry Systems, Inc. is prohibited. ESH-HES-10-0719