

Shown with 501 Option

The 5200 Series is also available in a **Complete One Box Solution**

5200 Series

The **grade 1** solution with **horizontal adjustability**

Specifications

- UL 1034, burglary-resistant listed
- UL 294 (6th Edition) listed
- ANSI/BHMA A156.31, Grade 1
- RoHS compliant
- Patent: 5,934,720

Electrical

- .24 Amps @ 12VDC/VAC
- .12 Amps @ 24VDC/VAC
- DC continuous duty/ AC intermittent duty only
- PoE friendly

Frame Application

- Metal
- Wood

The 5200 series electric strikes feature an in-frame horizontal adjustable design to simplify the installation process. This feature allows the installer to easily adjust the electric strike opening to accommodate the horizontal position of the latchbolt after the strike has been installed. This field selectable fail secure/fail safe unit is easy to install and accommodates latchbolts up to 3/4" throw.



5200 Models

5200
Universal electric strike
Faceplate options ordered separately, see page 26

5200C
Complete electric strike
Includes the 501 and 501A faceplates in the box



Model 5200C includes a 501 and a 501A faceplate in the box

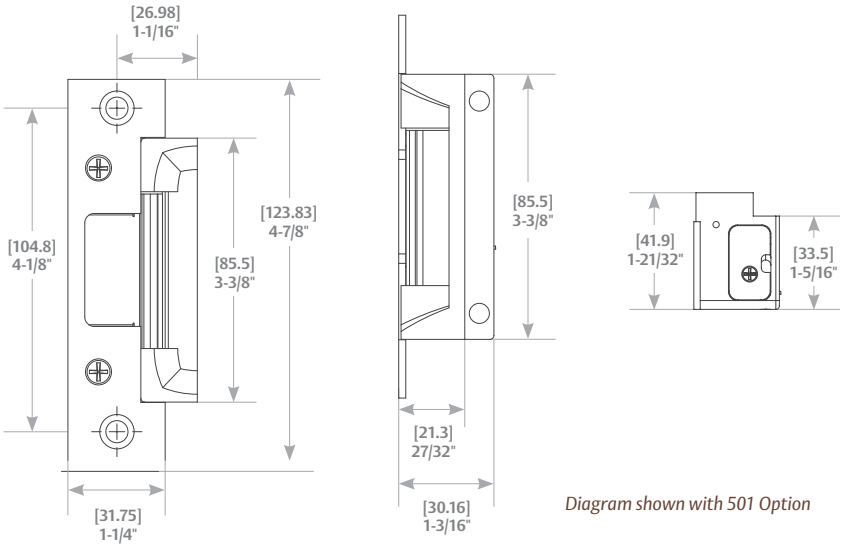


Diagram shown with 501 Option

Standard Features

- Tamper resistant
- Static strength 1,500 lbs.
- Dynamic strength 70 ft-lbs.
- Endurance 500,000 cycles
- Field selectable fail secure/ fail safe
- Dual voltage 12 or 24 VDC/VAC
- In-frame horizontal adjustment
- Non-handed
- Internally mounted solenoid
- Accommodates 5/8" - 3/4" latchbolt (3/4" with 1/8" door gap)
- Strike body depth 1-3/16"
- Plug-in connector
- Trim enhancer included
- Five-year limited warranty

Optional Features

- **LBM** » Latchbolt monitor
- **LBSM** » Latchbolt strike monitor

Accessories

5200-500 » Filler block for retro-fit applications

150 » Strike latch guard

154-MTK » Metal template kit

2001M » Plug-in bridge rectifier

2004M » ElectroLynx® adapter

2005M3 » SMART Pac® III

2006M » Plug-in buzzer

5204-1/2 » 1/2" stackable lip extension

5204-1 » 1" stackable lip extension

5204-1-1/4 » 1-1/4" stackable lip extension

Finishes

630 » Satin stainless steel

605 » Bright brass

606 » Satin brass

612 » Satin bronze


613 » Bronze toned

629 » Bright stainless steel

BLK » Black

**Complete Pacs are only available in the 630 finish*

"Press Fit" Stackable Lip Extensions



a » 5204-1/2
1/2" stackable lip extension

b » 5204-1
1" stackable lip extension

c » 5204-1-1/4
1-1/4" stackable lip extension

CYLINDRICAL LOCKSETS

SPECIALTY LOCKSETS

FIELD SELECTABLE (12 OR 24VDC)

FIELD SELECTABLE (FAIL SECURE / FAIL SAFE)

GRADE 1

UL 1034 BURGLARY LISTED

hes
ASSA ABLOY

© 2015, Hanchett Entry Systems, Inc., an ASSA ABLOY Group company.

5000/5200 Series Faceplate Options

SPECIALTY

***Operation**: After releasing the latchbolt, the keeper returns to the locked position*



4-7/8" x 1-1/4"

Square corners and flat faceplate

501 Option

For use with: Cylindrical locksets in ANSI metal jambs

» **ANSI/BHMA Numbers:** E09321, E09322, E09323





4-7/8" x 1-1/4"

Radius corners and flat faceplate

501A Option

For use with: Cylindrical locksets or spring latches in aluminum frames. Includes universal mounting tabs.

» **ANSI/BHMA Numbers:** E09321, E09322, E09323







7-15/16" x 1-7/16"

Radius corners and flat faceplate

502 Option

For use with: Cylindrical locksets or spring latches in aluminum frames. Includes universal mounting tabs.

» **ANSI/BHMA Numbers:** E09321, E09322, E09323







6-7/8" x 1-1/4"

Radius corners and flat faceplate

503 Option

For use with: Cylindrical locksets or spring latches in aluminum frames. Includes universal mounting tabs.

» **ANSI/BHMA Numbers:** E09321, E09322, E09323







10" x 1-3/8"

Radius corners and flat faceplate

504 Option

For use with: Cylindrical locksets. Four-point mounting for wood installations

» **ANSI/BHMA Numbers:** E09321, E09322, E09323

