


The 7000 Series is also available in a **Complete One Box Solution**

7000 Series

The **dual, pre-load solution** for cylindrical latch bolts and rim exit devices

Offers two solutions to address pre-loaded doors. The in-frame adjustable feature allows the installer to easily adjust the electric strike opening to accommodate the horizontal position of the latchbolt after installation. The pre-load release function allows the electric strike to operate smoothly throughout the year under varying loads on the door caused by air-conditioning pressure, changes in the weather, warped doors or doors with weather stripping that often bind standard electric strikes. This unit accommodates cylindrical latchbolts up to 5/8" throw and rim exit latchbolts up to 3/4" throw.

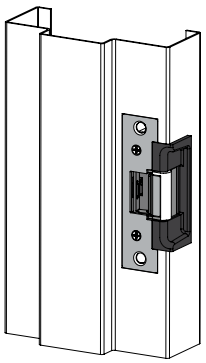

Specifications

- UL 1034, burglary-resistant listed
- UL 294 (6th Edition) listed
- ANSI BHMA A156.31, Grade 1 (791 and 792 options)
- ANSI/BHMA A156.31, Grade 2 (783S, 786S, and 789S options)
- MEA New York City accepted
- RoHS compliant

Frame Application

- Metal
- Wood

Electrical (continuous duty)

- .45 Amps @ 12VDC
- .25 Amps @ 24VDC
- PoE friendly

7000 Models


7000
Universal electric strike
Faceplate options ordered separately, see page 32

7000C*
Complete electric strike
Includes the 791 and 792 faceplates in the box



Model 7000C includes a 791 and a 792 faceplate in the box

*Complete Pac is for cylindrical latchbolt only

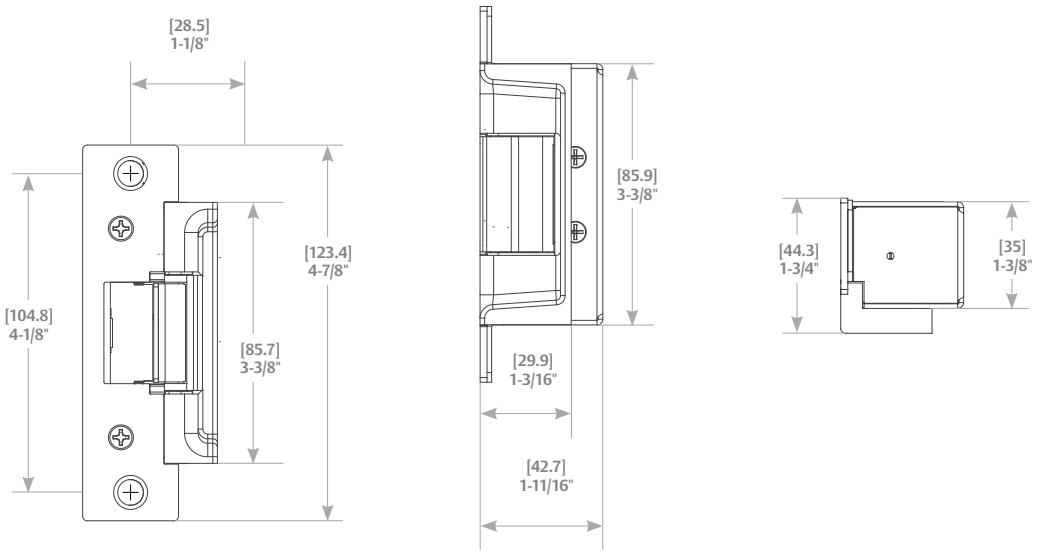

Standard Features

- Stainless steel construction
- Tamper resistant
- Static strength 1,500 lbs. (791 and 792 options)
- Dynamic strength 70 ft-lbs. (791 and 792 options)
- Static strength 1,000 lbs. (783S, 786S, and 789S options)
- Dynamic strength 50 ft-lbs. (783S, 786S, and 789S options)
- Endurance 500,000 cycles
- Field selectable fail secure/ fail safe
- Accommodates pre-load (up to 15lbs: fail secure only)
- Horizontal adjustment
- Non-handed
- Internally mounted solenoid
- Strike body depth 1-11/16"
- Plug-in connector
- Trim enhancer (791 and 792 options)
- Pocket adapter (786S and 789S options)
- Three-year limited warranty

Optional Features

- **LBM** » Latchbolt monitor

Accessories

SMB » Surface mounting box (783S and 789S options)

7000-104 » Lip extension trim adapter

7000-105 » Trim enhancer (goof plate)

7000-106 » Keeper pocket adapter

7000-107 » Full keeper shim pack

7000-108 » 1/8" spacer plate (783S and 789S options, black finish only)

7000-110 » Replacement strike plate (791 and 792 option)

150 » Strike latch guard

154-MTK » Metal template kit

2001M » Plug-in bridge rectifier

2004M » ElectroLynx® adapter

2005M3 » SMART Pac® III

2006M » Plug-in buzzer

Finishes
(791 and 792 options)

630 » Satin stainless steel

605 » Bright brass

606 » Satin brass

612 » Satin bronze

613C » Brown nylon powder coated

629 » Bright stainless steel

BLK » Black

**Complete Pacs are only available in the 630 finish*

Finishes
(783S, 786S and 789S options)

613C » Brown nylon powder coated

626 » Brushed chrome



hes®
ASSA ABLOY

© 2015, Hanchett Entry Systems, Inc., an ASSA ABLOY Group company.

7000 Series Faceplate Options

***Operation**: After releasing the latchbolt, the keeper returns to the locked position*



4-7/8" x 1-1/4"

791 Option

For use with: Cylindrical locksets up to 5/8" throw

» **ANSI/BHMA Numbers:** E09321, E09322, E09323



GRADE 1



7-15/16" x 1-7/16"

792 Option


For use with: Cylindrical locksets up to 5/8" throw

» **ANSI/BHMA Numbers:** E09321, E09322, E09323



GRADE 1

***Operation**: After releasing pullman latch, the keeper returns to the locked position*



9" x 1-3/4" x 11/16"

783S Option


For use with: Rim exit devices in metal jambs with up to a 3/4" pullman latch

Compatible locksets: American Device, Arrow, Dor-O-Matic, Monarch, Precision, Sargent, Von Duprin, Yale

» **ANSI/BHMA Numbers:** E09311, E09312, E09313



GRADE 2




6-1/2" x 1-3/4" x 1/2"

786S Option


For use with: Rim exit devices in aluminum jambs and surface mounted vertical rod exit devices with up to a 3/4" pullman latch. Includes keeper pocket adapter.

Compatible locksets: American Device, Arrow, Dor-O-Matic, Jackson, Monarch, Precision, Sargent, Von Duprin, Yale

» **ANSI/BHMA Numbers:** E09311, E09312, E09313



GRADE 2



9" x 1-3/4" x 1/2"

789S Option

For use with: Rim exit devices in aluminum jambs with up to a 3/4" pullman latch. Includes keeper pocket adapter.

Compatible locksets: American Device, Arrow, Dor-O-Matic, Jackson, Monarch, Precision, Sargent, Von Duprin, Yale

» **ANSI/BHMA Numbers:** E09311, E09312, E09313



GRADE 2