



The 9400 series is a slim-line, surface mounted electric strike designed to accommodate rim exit devices with a 1/2" throw latchbolt. All components are completely encased within its 1/2" thick stainless steel housing, so no cutting on the frame is required for installation. Simply place the electric strike on the surface of the frame, align it with the exit latchbolt, and install.

An 1/8" spacer plate is provided to accommodate varying door gaps. The 9400 exceeds Grade-1 standards for strength and performance. It is field selectable for fail secure and fail safe operation, and for 12 or 24VDC. The 9400 features a smooth cover to conceal the mounting screws and provide a sleek surface for superior looks.

# 9400 Series

## The slim-line, surface mounted solution

### Specifications

- UL 1034 burglary-resistant rated and suitable for outdoor use
- UL 294 (6th Edition) listed
- ANSI/BHMA, A156.31 Grade 1
- Patents: 6,390,520; 8,454,063
- RoHS compliant

- Patent Pending

### Frame Application


- Metal
- Wood


### Electrical (continuous duty)

- .45 Amps @ 12VDC
- .25 Amps @ 24VDC
- PoE friendly

### Spacer Plate Included

The 9400 ships with one 1/8" spacer plate included in the box. Units ordered in a 630 finish are stainless steel. All other finishes have a black stainless steel spacer. Additional black spacer plates can be ordered as an accessory.



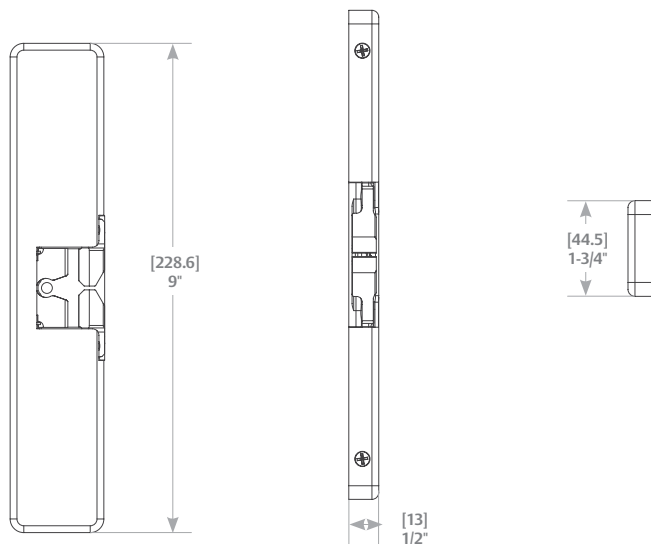

### Standard Features

- Installs in metal and wood frames
- One 1/8" spacer plate included
- Decorative cover for sleek look
- Stainless steel construction
- Tamper resistant
- Static strength 1,500 lbs.
- Dynamic strength 70 ft-lbs.
- Endurance 500,000 cycles
- Field selectable fail safe/fail secure
- Dual voltage 12 or 24VDC
- Horizontal adjustability
- Non-handed
- Internally mounted solenoid
- Accommodates up to 1/2" Pullman latch
- Five-year limited warranty

### Optional Features

- **LBM** » Latchbolt monitor
- **LBSM** » Latchbolt strike monitor

### Accessories

- 9400/9500/9600-108** » Spacer plate (black or 630 finish)
- SMB** » Surface mounting box
- 2001M** » Plug-in bridge rectifier
- 2004M** » ElectroLynx® adapter
- 2005M3** » SMART Pac® III
- 2006M** » Plug-in buzzer

### Finishes

- 630** » Satin stainless steel
- 605** » Bright brass
- 606** » Satin brass
- 612** » Satin bronze
- 613** » Bronze toned
- 613E** » Dark Oxidize Satin Bronze (*NEW*)
- 629** » Bright stainless steel



RIM EXIT DEVICES



FIELD SELECTABLE (12 OR 24VDC)



FIELD SELECTABLE (FAIL SECURE / FAIL SAFE)



GRADE 1



OUTDOOR RATED



UL 1034 BURGLARY LISTED

