

new

9500 Series

The **strong durable, fire-rated** surface mounted solution

The 9500 series is a 3 hour fire-rated, surface mounted electric strike designed to accommodate rim exit devices with a 3/4" throw Pullman latchbolt. All components are completely encased within its 3/4" thick stainless steel housing, so no cutting on the frame is required for installation. Simply place the electric strike on the surface of the frame, align it with the exit latchbolt and install. Adjustments have never been easier as the base is now separate from the cover.

The 9500 exceeds grade-1 standards for strength and performance. It is field selectable for fail secure and fail safe operation, and for 12 or 24VDC. This unique electric strike complies with NFPA 80-07 guidelines for retrofit into fire-rated frames.

Specifications


- UL 10C fire-rated, 3 hour (fail secure only)
- CAN4-S104 (ULC-S104) fire door conformant
- UL 1034, burglary-resistant listed and suitable for outdoor use
- UL 294 (6th Edition) listed
- ANSI/BHMA A156.31, Grade 1
- NFPA-252 fire door conformant
- ASTM-E152 fire door conformant
- California Fire Marshall listed
- NFPA 80-07 compliant
- RoHS compliant
- Patent: 6,390,520
- Patent Pending


Frame Application

- Metal
- Wood

Electrical (continuous duty)

- .45 Amps @ 12VDC
- .25 Amps @ 24VDC
- PoE friendly

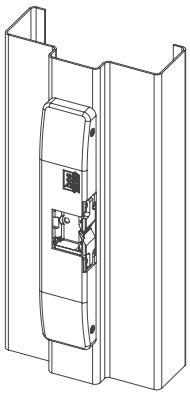

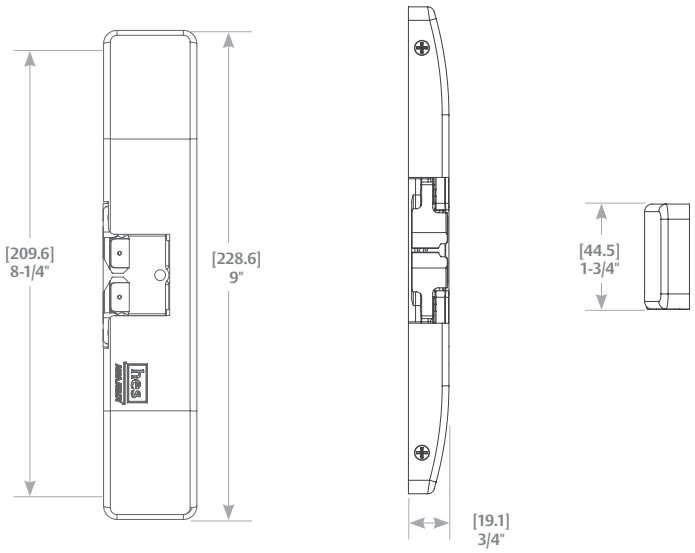

Standard Features

- Installs in metal or wood frames
- Separate base and decorative cover for easy adjustments
- Stainless steel construction
- Tamper resistant
- Static strength 1,500 lbs.
- Dynamic strength 70 ft-lbs.
- Endurance 1,000,000 cycles
- Field selectable fail safe/fail secure
- Dual voltage 12 or 24VDC
- Horizontal adjustability
- Non-handed
- Internally mounted solenoid
- Accommodates up to 3/4" Pullman latch
- Five-year limited warranty

Optional Features

- **LBM** » Latchbolt monitor
- **LBSM** » Latchbolt strike monitor

Accessories

9400/9500/9600-108 » Spacer plate (black or 630 finish)

SMB » Surface mounting box

2001M » Plug-in bridge rectifier

2004M » ElectroLynx® adapter

2005M3 » SMART Pac® III

2006M » Plug-in buzzer

Finishes

630 » Satin stainless steel

605 » Bright brass

606 » Satin brass

612 » Satin bronze

613 » Bronze toned

613E » Dark Oxidize Satin Bronze *(NEW)*

629 » Bright stainless steel

RIM EXIT DEVICES

FIELD SELECTABLE (FAIL SECURE / FAIL SAFE)

FIELD SELECTABLE (12 OR 24VDC)

FIRE RATED

GRADE 1

OUTDOOR RATED

UL 1034 BURGLARY LISTED

hes®
ASSA ABLOY

© 2015, Hanchett Entry Systems, Inc., an ASSA ABLOY Group company.