9100 Series
Surface Mounted Electric Strike

h.e.s.
ASSA ABLOY

Experience a safer
and more open world

Retro-mounted electric strike with integrated adjustability and field installable options for maximized versatility on single glass doors.



Convenient

- Retro-mount using existing header prep; no cutting required
- Integrated adjustability provides optimal latch positioning, drastically reducing installation time and labor costs
- Adaptable voltage sensing technology (12-24 VDC)
- Quiet operation

Flexible Design

- Factory configured or field installable monitoring
- Field selectable fail secure/fail safe
- **L** Left Handed or **R** Right Handed options
- Available in 7 Architectural Finishes to accent existing hardware

Quality

- Exceeds ANSI/BHMA A156.31 Grade 1 standards for strength and performance
- Designed with the strength and durability to meet UL 1034 outdoor rating requirements
- Stainless steel construction



Grade 1 | SecuriCare 5 Year Warranty | Tubular Exit Device | Field Selectable (Fail secure /Fail safe) | Dual Voltage 12/24 | PoE Friendly | Outdoor Rated | Burglary Rated

Features

- Retro-mount using existing header prep
- No cutting required
- Integrated adjustability
- Adaptable voltage sensing technology (12-24 VDC)
- Factory configured or field installable monitoring
- Static strength 1,500 lbs
- Dynamic strength to 70 ft-lbs
- Endurance 1 million cycles
- Field selectable fail secure/fail safe
- Quiet operation
- Stainless steel construction
- SecuriCare five-year, no-fault, no questions asked warranty

Certifications

- ANSI/BHMA A156.31, Grade 1
- RoHS Compliant
- UL 294
- UL 305
- UL 1034 Burglary-Resistant Listed and Suitable for Outdoor Use

Specifications

Frame Application

- Aluminum
- Hollow Metal
- Wood (additional mounting hardware required)


Electrical

- DC Continuous Duty
- Operating Voltage (12-24 VDC/VAC)
- 240 mA at 12 VDC, 120 mA at 24 VDC


Optional Features

- **L** Left Handed or R Right Handed options
- **LM** Latchbolt monitor
- **LMS** Latchbolt strike monitor
- Available in 7 finishes

Dimensions

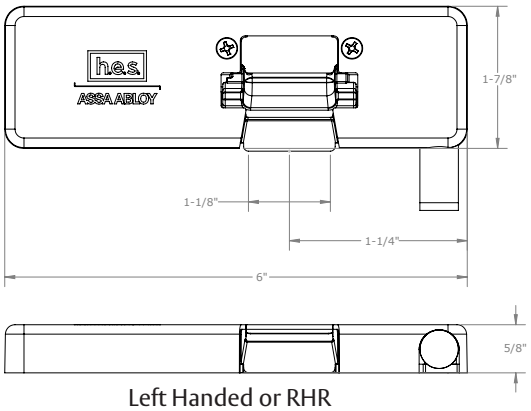

Left Handed or RHR

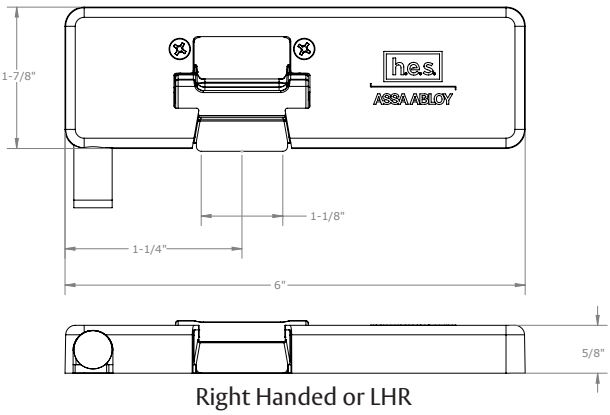


Right Handed or LHR

How to Order

SERIES	HANDING	FINISH	OPTION (S)
9100	L	– 630	
9100 Electric Strike for tubular, vertical rod exit devices for single doors	**L** Left Hand/Right Hand Reverse*	**605** Bright Brass	**(blank)** No Monitoring
	R Right Hand/Left Hand Reverse*	**606** Satin Brass	**LM** Latchbolt Monitoring
		612 Satin Bronze	**LMS** Latchbolt and Strike Monitoring
		613E Dark Oxidized Satin Bronze Powder	
		629 Bright Stainless Steel	
		630 Satin Stainless Steel	
		BSP Black Suede Powder	

** Refer to handing diagram for proper handing selection*

Handing Diagram

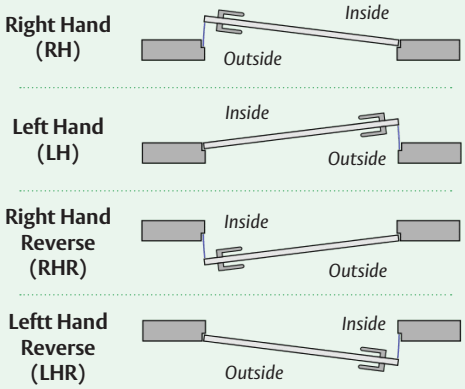

NOTE: Electric strike compatibility is determined at time of electric strike product release. ASSA ABLOY is not responsible for incompatibility of products that have changed in design or craftsmanship by their respective manufacturers. When compatibility is a concern, contact Customer Support for application assistance.

h.e.s. ASSA ABLOY

800 626 7590 | hesinnovations.com
customerservice.hes@assaabloy.com
techsupport.hes@assaabloy.com

Printed in the U.S.A. Patent pending and/or patent www.assaabloydss.com/patents

Copyright © 2023, Hanchett Entry Systems, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of Hanchett Entry Systems, Inc. is prohibited. HES-117-0923