

PowerJump Mounted Dimensions

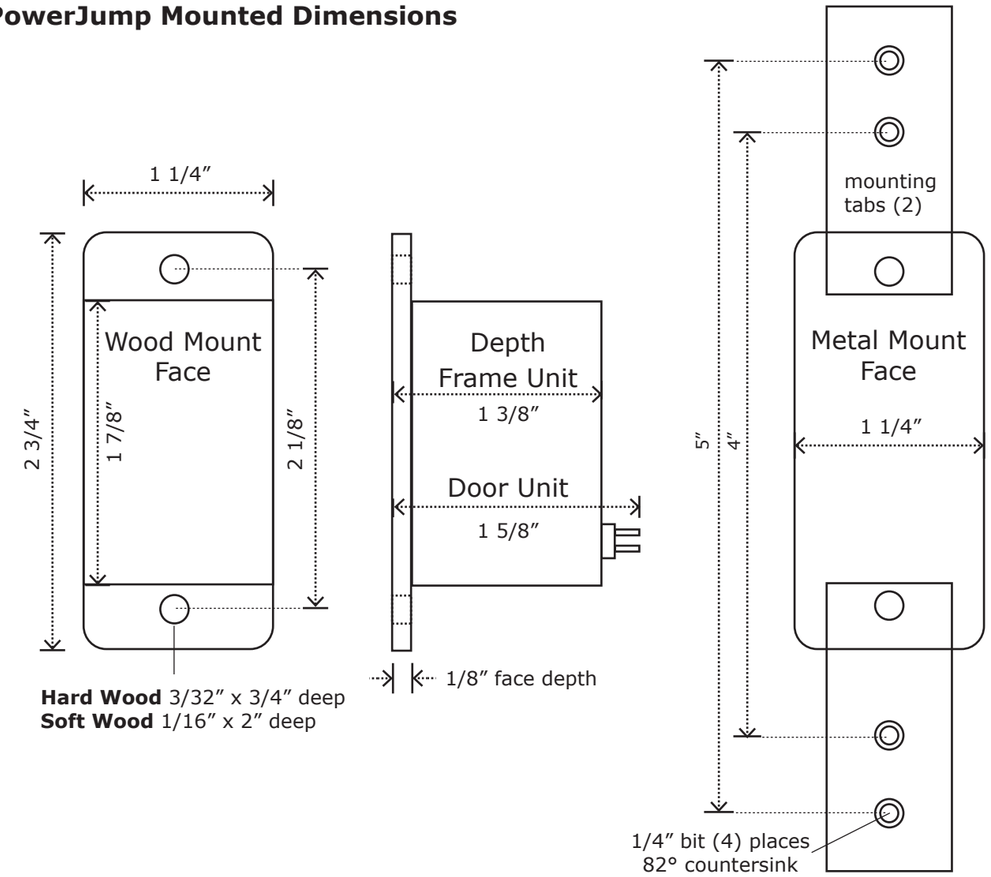

Hard Wood 3/32” x 3/4” deep
Soft Wood 1/16” x 2” deep

Troubleshooting:

Check voltage at frame side unit is within 24V +/- 10%
Check voltage on door side with door closed and unit under load with flying leads
Check air gap between faces is 3/16” or less. Frame side unit can be shimmed outward to improve performance.

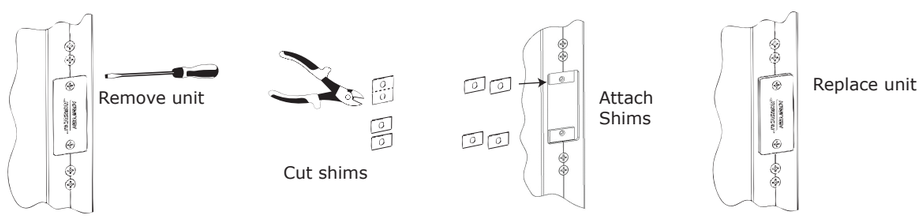

Questions about Installation?
Contact Securitron at: 1-800-MAGLOCK (800-624-5625)

© Copyright, 2012, all rights reserved

SECURITRON
ASSA ABLOY

Securitron Magnalock Corp.
www.securitron.com
Tel 800.624.5625


ASSA ABLOY, the global leader
in door opening solutions

PowerJump™ ICPT Installation Instructions

Package Contents

How does it work?
Scan the QR code for an online video

Door side unit (red wire)
(4) Metal mounting tabs
(8) 10/32 flathead machine screws
(4) 8/32 flathead machine screws
(4) #8 1” wood screws
(4) #8 2 1/8” wood screws

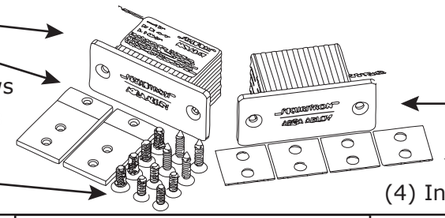

Frame side unit (purple wire)
(8) Metal mounting spacers
(4) Installation templates (not shown)

Recommended Tools	Metal Mounting Tools:	Wood Mounting Tools:
Screwdriver, drill, center punch wire nuts (22 gauge), tape Door Wedge	Rotary tool with cutting wheel 1/4” metal drill bit 82° countersink bit	Wood chisel and hammer 3/32” and 1/16” wood drill bits 1” Auger bit

Specification

Input power at frame side:	500mA at 24V DC
Output power (selectable voltage) at door side:	250mA at 24V DC or 500mA at 12V DC

Operating temperature: 32 to 120 F / 0 to 49 C
Maximum gap between faces: 3/16”
Compatibility: PowerJump does not support LBM, REX or other signals from the lock


Overview

The PowerJump ICPT transfers power across a door gap through magnetic inductive coupling.

Installation Steps

Step 1: Survey installation site
Unit may be installed on latch side, hinge side, top or bottom of door. Note the ICPT requires a depth of 1 3/8” in the frame and 1 5/8” in the door.


Step 2: Select the template matching your door and frame material. Apply the templates as shown at the desired mounting location. Make sure the center line arrows are aligned when the door is closed.

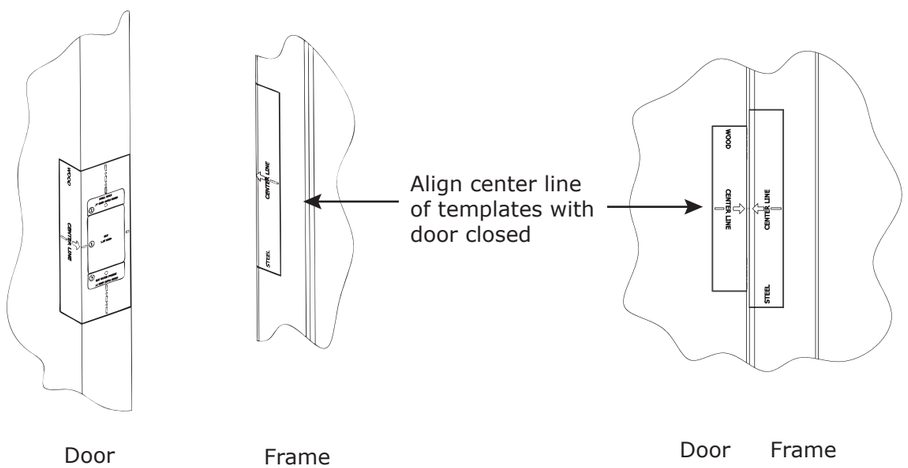

© Copyright, 2012, all rights reserved

Step 3: Installing in a **WOOD** door or frame


Wood A: Carefully tap a chisel through the template to score the finish. Pre-Drill (2) mounting holes according to wood type.




Hard Wood: 3/32" bit, 3/4" deep
Soft Wood: 1/16" bit, 2" deep


Wood B: Carefully drill out the pocket with the auger bit, to a depth of 1 5/8"
Use a wood chisel to straighten the sides
Be careful not to damage the surface

Tip: mark the auger bit with tape at a depth of 1 5/8"
Drill to this depth







Wood C: Cut relief for faceplate using a chisel to a depth of 1/8"



Wood D: Drill a wiring channel for connection to the device to be powered

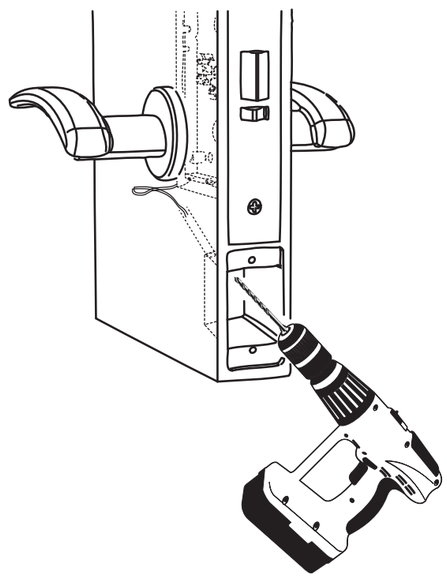

Wood E: Test fit the unit into the pocket and file if needed




© Copyright, 2012, all rights reserved

SECURITRON
ASSA ABLOY


Securitron Magnalock Corp.
www.securitron.com
Tel 800.624.5625

ASSA ABLOY, the global leader
in door opening solutions

Step 4: Installing in a **METAL** door or frame

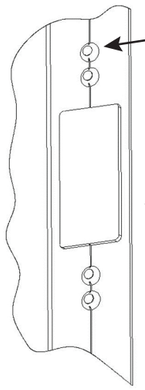

Metal A: Drill (4) mounting tab holes with 1/4" drill bit countersink with 82° bit




Metal B: Cut main pocket with rotary tool using a metal cutting wheel or a metal cutting saw



Metal C: Test fit and file opening


Metal D: Install mounting tabs using (4) 10/32 screws.
Attach adhesive spacers as needed to mount the unit flush with the frame


Tip: For 18 gauge metal use (2) of the included spacers

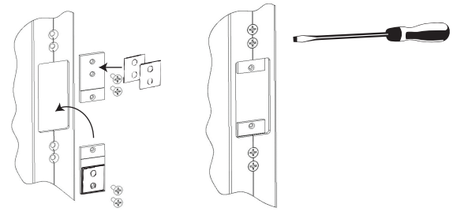


Step 5: Voltage Selection and Wiring

a) Select output voltage of 12V or 24V. Move the two jumpers as shown:






b) Supply 24V DC power to frame unit. Connect purple wire to positive (+) and black wire to (-). Connect door side electrified device via wiring channel, connect red wire to (+) and black wire to (-)

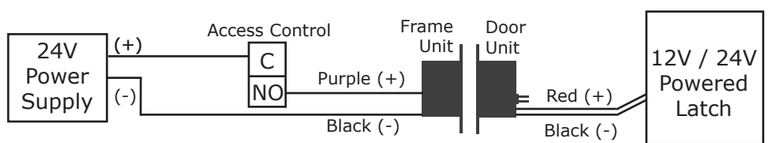


Step 6: Mount PowerJump



Wood: Use (2) #8 wood screws

Hard Wood: 1" Screws
Soft Wood: 2 1/8" Screws



Metal: Use (2) 8/32 machine screws to mount to tabs

© Copyright, 2012, all rights reserved