

ASSA ABLOY is the global leader in door opening solutions, dedicated to satisfying end-user needs for security, safety and convenience.
Rixson® is a registered trademark of Yale Security Inc., an ASSA ABLOY Group company. Copyright© 2006, 2009, Yale Security Inc., an ASSA ABLOY Group company.
All rights reserved. Reproduction in whole or in part without the express written permission of Yale Security Inc. is prohibited.

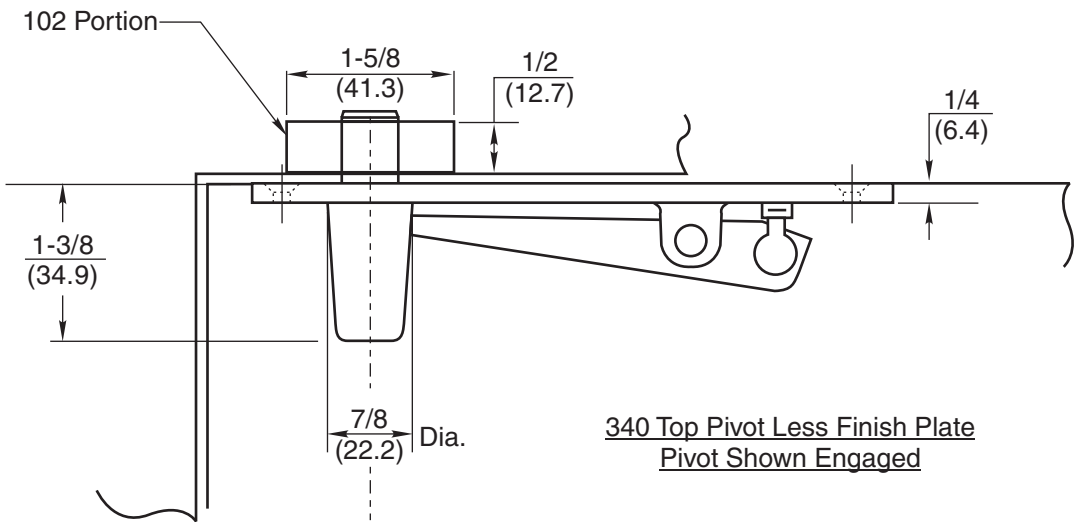

340 Top Pivot Less Finish Plate
Pivot Shown Engaged

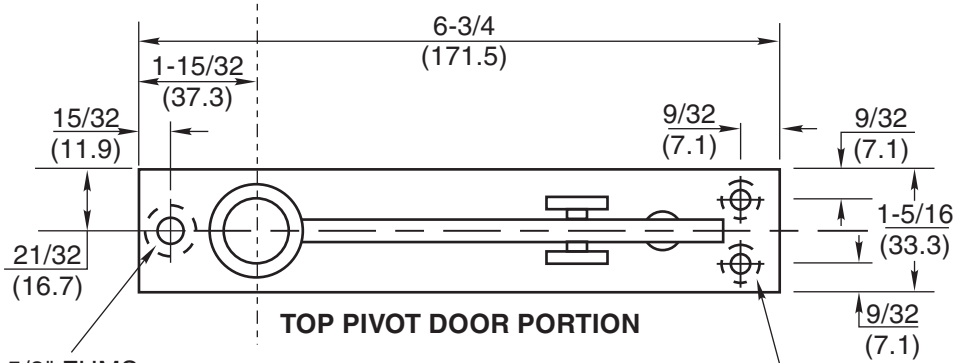

TOP PIVOT DOOR PORTION

1/4-20 x 5/8" FHMS or
#14 x 1-1/2" FHWS
(1 Place)


12-24 x 5/8" FHMS or
#12 x 1-1/4" FHWS
(2 Places)

Installation Instructions:

1. Pivot point determined by bottom pivot or floor closer.
2. Prepare door and frame per details shown.
3. To insure proper operation of door, the centerline of the top pivot pin must be straight and plumb with bottom spindle.
4. Install walking beam with pin retracted.
5. Install 102 portion.
6. Place door on bottom pivot and raise door to vertical position.
7. Engage top pivot pin by turning adjusting screw clockwise when door portion is in alignment with the jamb portion.

Note:

1. Do not scale drawing.
2. Dimensions given in inches (mm).

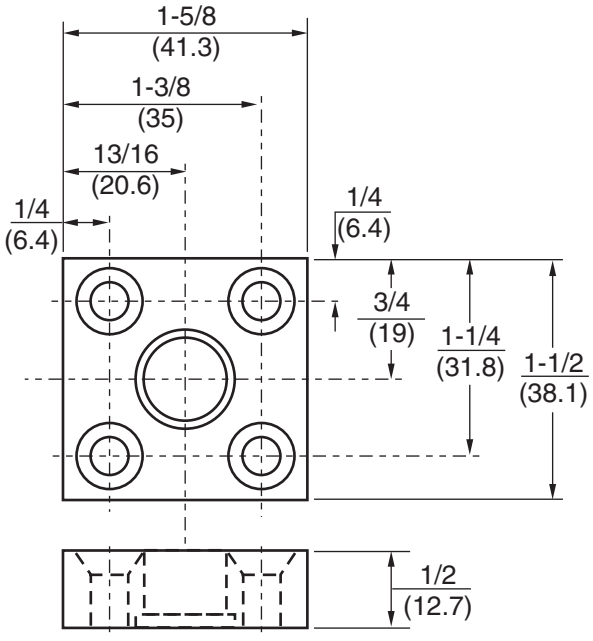

Jamb Portion

340 x 102 Top Pivot Center Hung Non Handed

RIXSON
ASSA ABLOY
www.rixson.com

TEMPLATE NUMBER	DATE
IS-340x102	07-09