

DESCRIPTION:

The IX-SS-RA-FR is an IP addressable stainless steel, flush mount audio door station with an emergency call button. The unit features French signage for emergency button. A call status indicator is included to meet rescue assistance requirements.

The emergency button will trigger two programmable relay outputs for activation of external systems or devices and can be programmed to call up to 20 master stations.


The unit has a stainless steel faceplate and includes tamper resistant screws.

The IX-SS-RA-FR is compatible with the IX Series. The emergency button can be assigned one of three priority call queuing levels. The station is 802.3af PoE compliant.

Flush mount with the supplied back box or surface mount with the SBX-ISDVFRA.

FEATURES:

- Audio communication of calling area
- LED call status indicator
- Red mushroom button for urgency call
- Stainless steel faceplate with tamper resistant screws

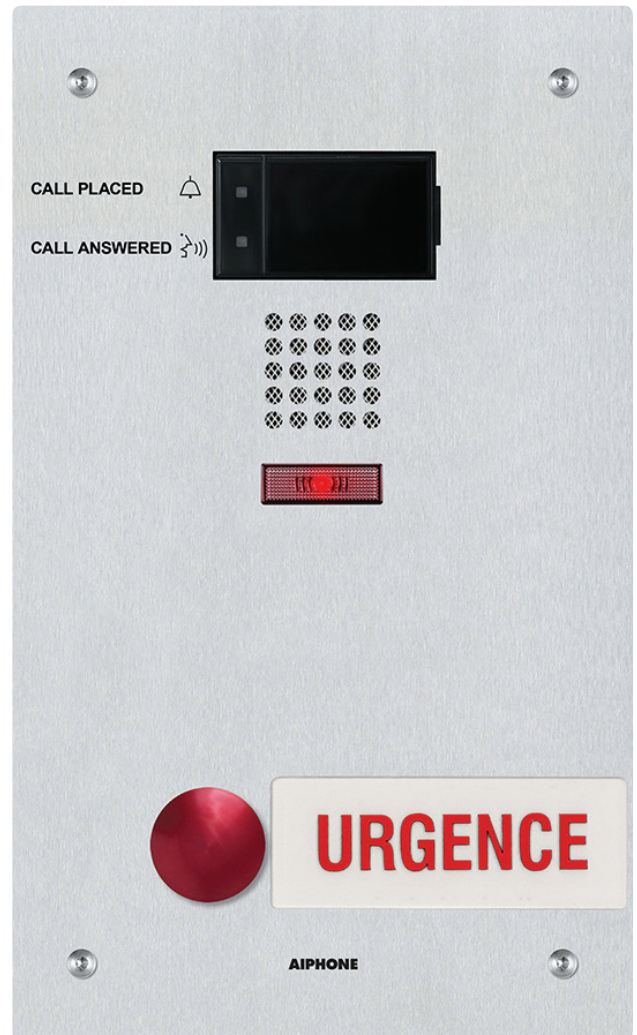

IX-SS-RA-FR

IP Addressable Audio Emergency Station for the IX Series

FEATURE CALL-OUT DEFINITIONS:

- [1] Microphone
- [2] Call status indicators
- [3] Speaker
- [4] LED locator
- [5] Emergency button
- [6] Urgence signage

SPECIFICATIONS:

- Power Source: 802.3af PoE compliant
- Communication: Open voice, hands-free
- Wiring: CAT-5e or CAT-6
- Wiring distance: 330'
- Door release: 24V AC/DC, 500mA (N/O, COM, N/C)
- Operating Temp: 14° - 140°F (-10° - 60°C)
- Ingress Protection: IP55
- Dimensions: 11-11/16"H x 7"W

FEATURE CALL-OUTS:

