JP-4HD

Sub-Master Station



DESCRIPTION:

The JP-4HD is a video sub master station for use with the JP-4MED master station. A maximum of 7 sub master stations can be used in the JP Series. The JP-4HD offers a 7” color touchscreen LCD and allows for handset (duplex) and hands-free (VOX) communication. This unit is equipped with a door release button for the user to allow visitor entry. The JP-4HD is also equipped with PTZ and brightness controls, giving the user control of the door station camera angle and camera lighting for better visibility.
The JP-4HD connects to either the master station or JP-8Z distribution unit using CAT-5e / CAT-6 cable.

JP-4HD FEATURES:


- 7” Color touchscreen LCD
- Hands-free (VOX) or handset communication
- Door release button
- Optional service button
- PTZ and brightness control
- Selectable call tones (8)
- Station partitioning with security code
- All Call to inside stations
- Door monitoring
- Continuous room monitoring

Aiphone Corporation
1700 130th AVE NE * Bellevue, WA 98005
Ph: (800) 692-0200 * Fax: (425) 455-0071
tech@aiphone.com

JP-4HD

Sub-Master Station

FEATURE CALL-OUT:

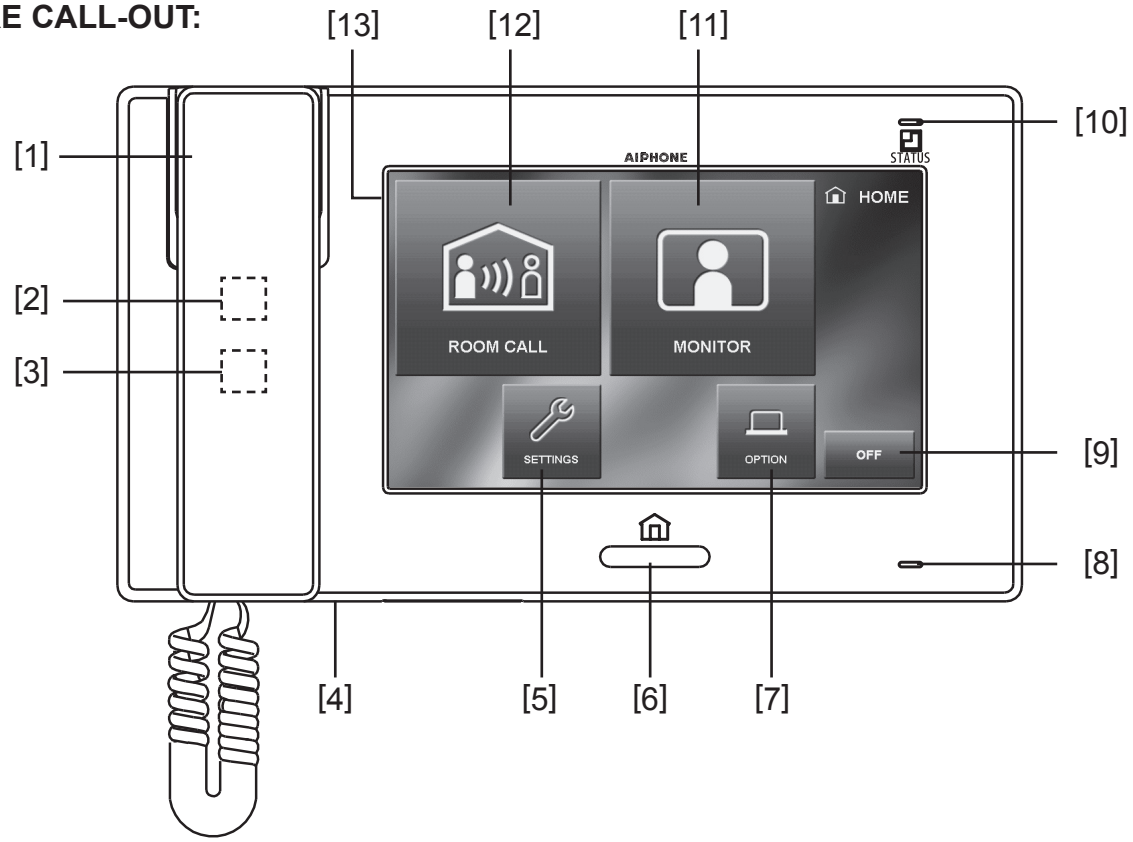

FEATURE CALL-OUT DEFINITIONS:

[1] Handset

[2] Speaker

[3] Hearing aid T-mode symbol

[4] Reset button

[5] Settings button (touchscreen)

[6] Home button

[7] Option button (touchscreen)

[8] Microphone

[9] Off button (touchscreen)

[10] Status LED

[11] Monitor button (touchscreen)

[12] Room call button (touchscreen)

[13] Color LCD touchscreen

SPECIFICATIONS:

Power Source:	24V DC - use PS-2420UL
Consumption:	200mA (max)
Communication:	
Handset	Simultaneous communication
Hands-free	Auto-voice actuation
Monitor:	7” TFT color touchscreen LCD
Pixels:	800 x 480
Mounting:	Surface wall mount or desk mount using MCW-S/A (sold separately)
Temperature:	32-104°F (0-40°C)
Dimensions:	5-11/16” H x 10-1/16” W x 1-7/8” D
Weight:	Approx. 1.72 lbs (780g)

Aiphone Corporation
1700 130th AVE NE * Bellevue, WA 98005
Ph: (800) 692-0200 * Fax: (425) 455-0071
tech@aiphone.com