Simplex®
LP1000 Series



- **Mechanical Pushbutton**
- **Single Access Code**
- **Exit Trim**
- **Lever**

Features

Access Control:	Mechanical pushbutton lock eliminates problems and costs associated with issuing, controlling, and collecting keys and cards. Provides exterior access by combination, while allowing free egress with Exit Device (not supplied).
No Battery:	Fully mechanical lock eliminates the material and labor expense of battery replacements
Locking Device Options:	Rim Exit Device: Compatible with most leading brands of Exit Devices—see list below (Exit Device and mounting hardware not included)
Exit Device Compatibility:	**For the most accurate listing of compatible Exit Devices, see this page on our website** Black & Decker (K-12) QED111/112 Cal Royal 5000/F5000 Detex Advantex Series 10, 20, 21,40, 50, 51 Detex 10/F10 Series Dorex 8500R/8500F Dorex 9500PR/9500FR Dorma 9100, 9300, 9400 Monarch XX-R*, FXX-R, 18-R*, F-18-R*, 17-R, F-17-R, XX-V*, F-XX-V*, 18-V*, F-18-V*, F-XX-V*, 11-R*, 11-V* Von Duprin 22, 88 NL, 98, 99, 900, 2227, 9827, 9847, 9847 WDC, 9848, 9857, 9927, 9947, 9947, WDC, 9948, 9957, 90027, 90047 WDC, 90057 *(requires special K-Hub Adapter Kit) • **Cannot be used with mortise design or most vertical rod Exit Devices** **ATTENTION: Compatibility is subject to change if modifications are made by Exit Device manufacturers without Kaba Access Control's knowledge**
Number of Codes:	Single access code—one easy-to-manage code for all users
Handing:	Factory-handed; not field reversible
Key Override (Optional):	Small format interchangeable cores, large format removable cores
Operation Modes:	Single credential access Exit Device may be dogged without affecting the LP1000
Economical:	A cost effective access control solution

Mechanical Features

Construction:	Heavy-duty cast front housing; heavy-duty mounting plate; fixed ADA-compliant lever
Numeric Keypad:	Vandal resistant, solid metal pushbuttons
Handing:	Factory-handed; not field reversible
Standard Finishes:	Antique Brass 05 (609), Satin Chrome 26D (626)
Optional Finishes:	Bright Chrome 026 (625), Bright Brass 03 (605)

Simplex®

LP1000 Series

Mechanical Features (cont.)

Latch & Exit Device:	Not supplied (see list for compatibility on prior page)
Strike:	Supplied with Exit Device
Exit Device Hub Rotation:	Up to 60°, counterclockwise for left hand and clockwise for right hand
Tailpiece:	2¾" (70 mm) tailpiece for Exit Device operation from outside Optional 5" (125 mm) tailpiece for freezer doors (purchased separately)
Minimum Stile Recommended:	5" (127 mm)
Weight:	8 lbs. (3.6 kg)

Key Override

Interchangeable Cores:	Small format—Best and equivalents (6 or 7-pin length)
Removable Cores:	Large format—Medeco/ASSA/Yale/Abloy (5 or 6-pin length), Corbin Russwin, Schlage, and Sargent

Installation

Door Preparation:	Recessed through bolts may be required for Exit Device preparation
Door Thickness:	1⅜" (35 mm) to 2¼" (57 mm) Optional 5" (127 mm) tailpiece (purchased separately)
Items Supplied Include:	Installation manual, full-scale template, combination change tool, and required lock installation hardware only

Certification and Testing


Accessibility Standard:	Americans with Disabilities Act (ADA)
Durability:	Weather resistant
Fire Rating:	3-hour UL/ULC fire rating for “A” labeled doors

Warranty


Warranty:	3-year warranty

Exit Trim


Door handing must be specified when ordering.

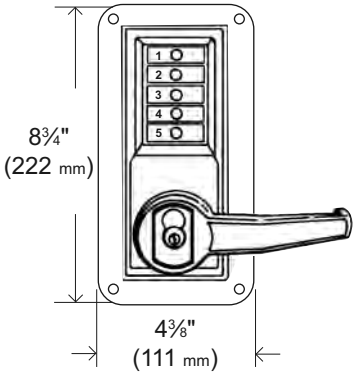

Exterior

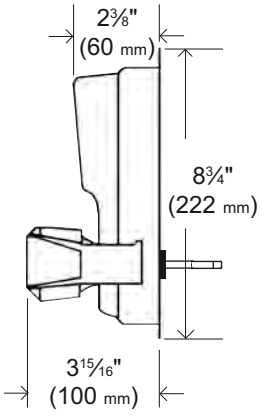


Exterior Side

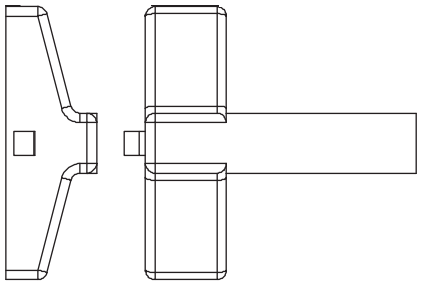


Interior
(not supplied)

LP1010



- Combination Entry
- Egress with Exit Device (not supplied)
- Exterior Combination Change (only)

LP1020



- Combination Entry
- Egress with Exit Device (not supplied)
- Key Override (not supplied)
- Exterior Combination Change (only)