SERIES M9900 - EXIT DEVICE

RIM MOUNT



MARKS #	FUNCTION
M9900	Rim Panic
M9900F	Fire Rated Rim Panic
M9900 - 48	Rim Panic - 48”
M9900F - 48	Fire Rated Rim Panic - 48”


OPTIONS	
M9900	33” LENGTH FOR 36” DOOR
M9900 - 48”	42” LENGTH FOR 48” DOOR

SPECIFICATIONS

- **Doors:** 1-3/4" thick standard.
- **End cover:** Flush mounted beveled “Panic Protector” design.
- **Strike:** Roller strike.
- **Rail Assembly:** Extruded Aluminum, 32D finish.
- **Dead latch Bolt:** Stainless Steel 3/4" throw.
- **Dead latch Bolt:** Stainless Steel 5/8".
- **Dogging feature:** Allen Key (M9900)
- **Ul listed:** For “Panic Hardware” and Fire Rated Model 3 hour fire doors up to 38" x 86".
- **ANSI:** ANSI 156.3 (2001), requirements for Grade 1.
- **3 Hour Fire Rating**
- **Finish:** 32D

• EXTRUSION HEAVY GAGE, 32D FINISH
• PANIC PROTECTOR™ END CAP
• LIFETIME MECHANICAL WARRANTY
• EASY INSTALLATION, ECONOMICAL

SERIES M9900 VR - EXIT DEVICE

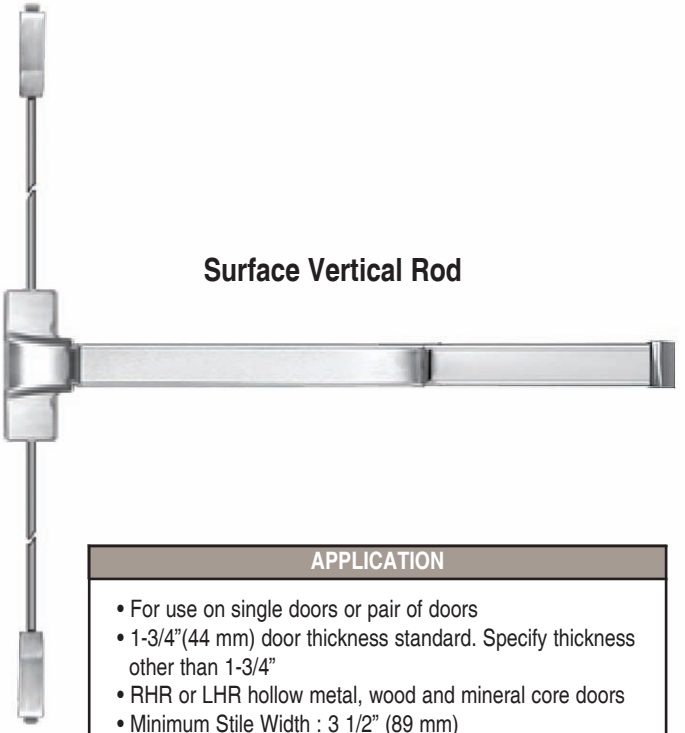

Surface Vertical Rod

MARKS #	FUNCTION
M9900 VR	Rim Panic Vertical Rod
M9900F VR	Fire Rated Rim Panic Vertical Rod
M9900 - 48 VR	Rim Panic Vertical Rod - 48”
M9900F - 48 VR	Fire Rated Rim Panic Vertical Rod - 48”

APPLICATION


- For use on single doors or pair of doors
- 1-3/4”(44 mm) door thickness standard. Specify thickness other than 1-3/4”
- RHR or LHR hollow metal, wood and mineral core doors
- Minimum Stile Width : 3 1/2” (89 mm)

32D FINISH

SPECIFICATIONS

Device Head Cover: Zinc alloy or stainless steel
Chassis: Steel, plated
Mechanism Housing: Extruded aluminum
Push Bar Base: Extruded aluminum
Touch Plate: Stainless steel
End Cap: Stainless steel
Top Latch: Stainless steel 37/64” (14.8mm)
Top Strike: Included
Bottom Latch: Stainless steel 37/64” (14.8mm)
Bottom Strike: Included
Latch Case Covers: Steel, stainless steel or brass
Vertical Rods: Aluminum tube
Hand: Non-handed
Mounting: Machine screws standard. Sex bolts optional. Order “SNB” for wood or unreinforced metal doors
Dogging: Allen-type key furnished
Finish: 32D
Outside Trim: Order separately
Standard height: For 7’0” doors
UL Listed: ANSI/BHMA Grade1 Panic Exit Hardware, 3-Hour Fire Rating

SERIES M9900 - EXTERIOR TRIM

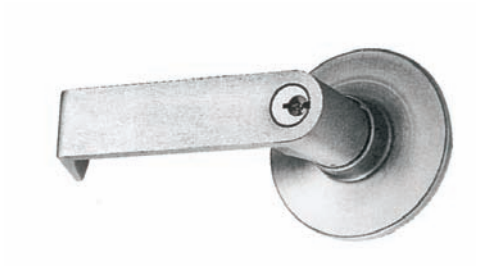M411 Shown Below	Lever/Rose Shown Below
 (cylinder not included)	
MESC600 Shown Below	**Cylindrical Dogging**
	

MARKS #	FUNCTION
M411	Finger Pill - no cylinder
MLHL-650A	Lever / Rose Trim Entry
MLHL680F	Lever / Rose Trim Storeroom
MLHL-600N	Lever / Rose Trim Passage
MLHL-600DT	Lever / Rose Trim Dummy Trim
MESC950AF/32D	Lever / Escuteon Trim Entry/Storeroom
MESC950N/32D	Lever / Escuteon Trim Passage
MESC950DT/32D	Lever / Escuteon Trim Dummy Trim

ENTRY LEVER TRIM

- Standard Marks “C” Keyway KNK cylinder for panic device.
- Cylinder locks or unlocks lever, rigid when locked; when unlocked retracts latch bolt.
- Marks 26D Finish / Standard 1-3/4” Door Thickness
- IC Prep Code G1, Less Cylinder G3

Escutcheon Lever Design

- Thru bolt design
- Non Handed design. Easily field reversible.
- Marks 32D Finish / Standard 1-3/4” Door Thickness
- Standard Marks “C” Keyway 1-1/4 Mortise cylinder with special cam
- IC Prep Code G1
- Less Cylinder G3

CAMS & TAILPIECES

MORTISE CYLINDER CAMS

M9907		MESC600A
M9908		MESC600F
M9909		MESC600A IC CORE HOUSING
M9910		MESC600A IC CORE HOUSING

KNK CYLINDER TAILPIECES

M9903		MLHL650A - CLIP ON
F1903.SCH		MLHL650F - SCREW CAP
M9984		MLHL650A or F - IC CORE 627 PIN