
Rixson is a brand associated with Yale Security Inc., an ASSA ABLOY Group company. Copyright © 2016, Yale Security Inc.
All rights reserved. Reproduction in whole or in part without the express written permission of Yale Security Inc. is prohibited.

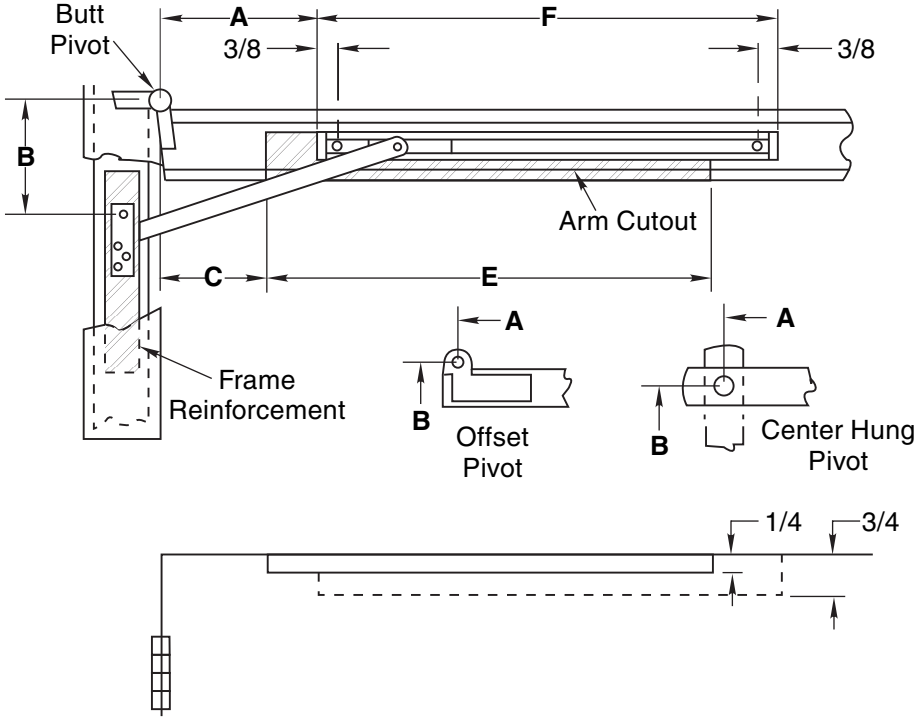


INSTALLATION INSTRUCTIONS


1. Determine the device number for the door opening. Then select proper dimensions from chart on OH80028B.

NOTE: A, B and C dimensions are measured from hinge center, not edge of door.

2. Locate "B" dimension on frame and mortise 1/4" deep for jamb bracket as shown.

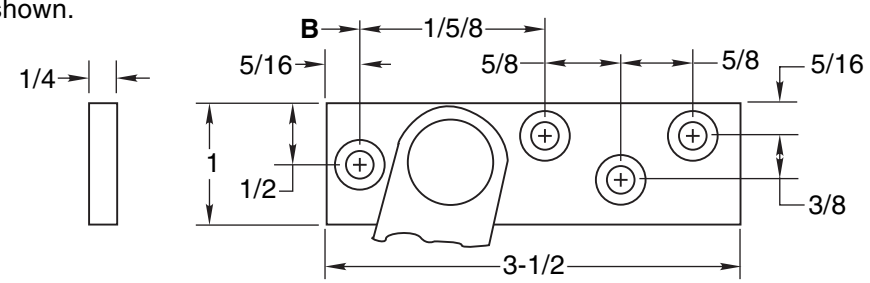


3. Locate "A" and "F dimensions on centerline of door and mortise 3/4" deep for channel. 1/16" head clearance shown. Coordinate the arm and rail cutout dimensions if head clearance varies.

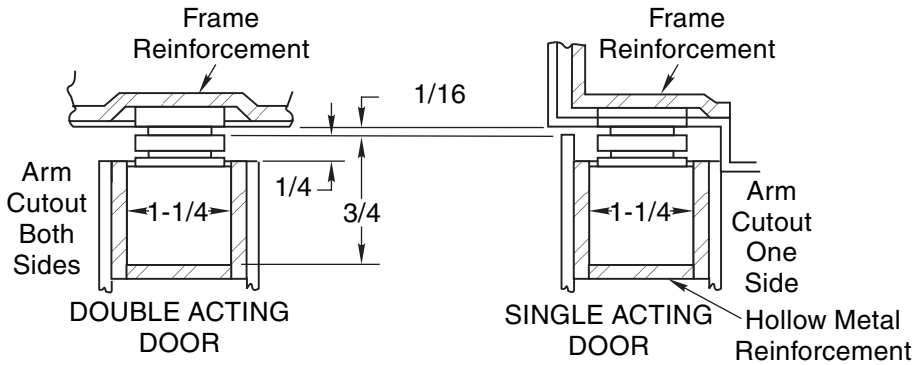

4. Locate "C" and "E" dimensions on top of door and mortise 1/4" deep as shown for arm cutout.


5. Install the holder with screws provided and locate the adjustable stop block by tightening its set screw. See view below.



NOTES:

- All hollow metal frames are to be provided with 3/16" min. thickness x 12" min. length reinforcement plates.
- All hollow metal doors are to have minimum 3/16" reinforcement plates.
- A, B and C dimensions are measured from centerline of pivot, not edge of door.
- Left hand shown, right hand opposite.

CAUTION: Note location of swing clear hinge centerline to determine "A", "B" and “C” dimensions.



Screw Details	
Jamb	**Door**
1/4-20 x 5/8" FHMS or #14 x 1-1/2" FHWS	5/16-18 x 3/4" FHMS or #18 x 2-1/4" FHWS

No. 6 ADJ Series
Concealed Door Stops & Holders

RIXSON
ASSA ABLOY
www.rixson.com

TEMPLATE NUMBER	DATE
OH80028A	04-16

Rixson is a brand associated with Yale Security Inc., an ASSA ABLOY Group company. Copyright © 2016, Yale Security Inc.
All rights reserved. Reproduction in whole or in part without the express written permission of Yale Security Inc. is prohibited.

No. 6ADJ Series Concealed Door Stops

1. See OH80028A for installation instructions.
2. Select proper dimensions noted below.
3. All dimensions given in inches.

* Butt mounting only.
Reversible, non-handed

When Using Center Hung Pivots, Check Pivot Manufacturer's Compatibility Prior to Specifying

	Model Number		Device Number	Degree						
			Stop	Door Opening	A	B	C	E	F	Max Opening
1-3/4" - 2-1/4" Butts & 3/4" Offset Pivot	6ADJ-123	6ADJ-133	6ADJ-136	24 - 28	* 2-5/8	* 4-1/8	* 0	* 16-5/8	16-1/16	110°
	6ADJ-223	6ADJ-233	6ADJ-236	28-1/16 - 33	* 4-3/16	* 5	* 1	* 19-1/8	17-5/16	110°
	6ADJ-323	6ADJ-333	6ADJ-336	33-1/16 - 38	7-7/16	6	4-1/4	20-5/8	18-13/16	110°
	6ADJ-423	6ADJ-433	6ADJ-436	38-1/16 - 43	10	7-7/16	7-1/4	22-3/8	20-15/16	110°
	6ADJ-523	6ADJ-533	6ADJ-536	43-1/16 - 48	13-5/16	8-1/2	8-1/4	26-1/4	22-7/16	110°

NOTE: A, B, and C dimensions measured from centerline of pivot, not edge of door.

	Model Number		Device Number	Degree						
			Stop	Door Opening	A	B	C	E	F	Max Opening
1-3/4" - 2-1/4" Center Hung	6ADJ-123	6ADJ-133	6ADJ-136	–	–	–	–	–	–	N/A
	6ADJ-223	6ADJ-233	6ADJ-236	30 - 36	4-7/8	5-11/16	5-1/2	15-3/8	17-5/16	105°
	6ADJ-323	6ADJ-333	6ADJ-336	36-1/16 - 41	7-15/16	6-1/2	6-1/4	19-1/8	18-13/16	110°
	6ADJ-423	6ADJ-433	6ADJ-436	41-1/16 - 46	10-7/16	7-7/8	7-3/4	22-3/8	20-15/16	110°
	6ADJ-523	6ADJ-533	6ADJ-536	46-1/16 - 50	13-3/4	8-15/16	8-3/4	26-1/8	22-7/16	110°

No. 6 ADJ Series
Concealed Door Stops & Holders

RIXSON
ASSA ABLOY
www.rixson.com

TEMPLATE NUMBER	DATE
OH80028B	04-16