


The PAH 60 is recommended for use on the inactive leaf of a pair of doors where the active leaf has a door closer installed.

MAXIMUM OPENING

Hold-open points up to 180°.

- Standard holder shipped with wood and machine screw pack.
- Handed for right or left swinging doors.
- Standard or optional custom powder coat finishes.
- Hold-open point adjustable at the soffit shoe.
- Optional plated finish on holder and fasteners.
- Optional SRI primer for installations in corrosive conditions.

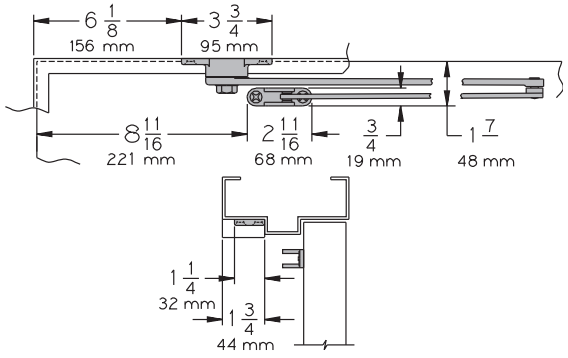

HOW-TO-ORDER PAH 60 HOLDER

1. SPECIFY HAND.

☐ RH

☐ LH

2. SPECIFY FINISH.

☐ Standard Powder Coat _____
Aluminum, Dark Bronze , Tan, Statuary, Light Bronze, Black, Brass.

OPTIONAL ARM FINISH

☐ Custom Powder Coat (RAL) _____

☐ Plated Finish, US _____

☐ SRI primer

- **Butt Hinges** should not exceed 5" (127 mm).
- **Auxiliary Stop** recommended at hold-open point.
- **Top Rail** minimum 2" (51 mm).
- **Rabbet Depth** minimum 1 1/4" (32 mm).

LCN CLOSERS
121 W. RAILROAD AVE.
P.O. BOX 100
PRINCETON, IL, USA 61356-0100

PHONE 800-526-2400
FAX 800-248-1460
www.lcn.ingersollrand.com

9/07