
SECURITRON
ASSA ABLOY


ASSA ABLOY, the global leader
in door opening solutions

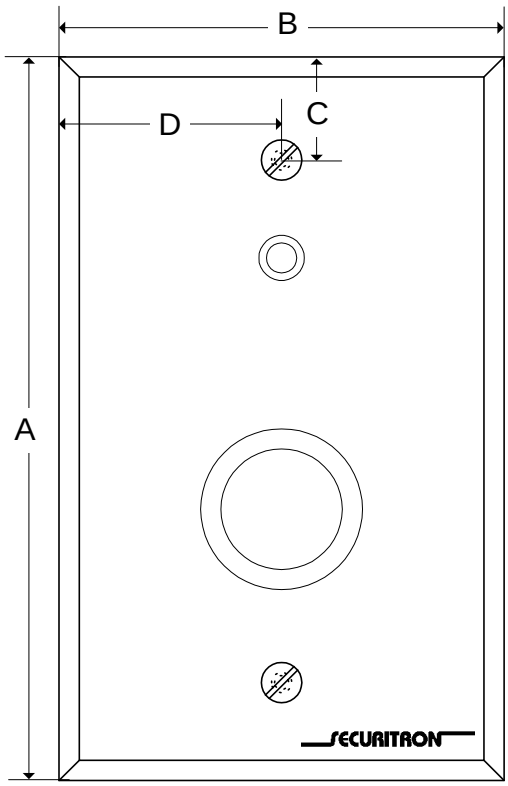

MODEL PB4	A	B	C	D	DEPTH
	4.5	2.75	.625	1.375	3

NOTE: FASTENERS NOT SHOWN ALL DIMENSIONS IN INCHES.

PUSH BUTTON - MODEL PB4

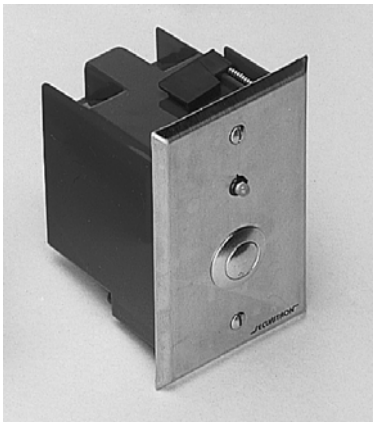

Features

- The PB4 incorporates an all-steel button
- Specifically designed to resist severe attacks such as hammer blows
- SPDT contacts rated at 4 amps (also available in DPDT)
- Bi-color LED (12 or 24VDC)
- Available in alternate or momentary
- Available on a single gang plate (back box included) or narrow stile

Operating Temperature

0 to 43C [32 to 110F]

How to Order

Part #	Description
PB4	Push Button Momentary Single Gang
PB4-2	Push Button Momentary Single Gang DPDT

© 2015, Hanchett Entry Systems, Inc., an ASSA ABLOY Group company.

PUSH BUTTON - MODEL PB4 (cont'd)

PB4A-2	Push Button Alternate Single Gang DPDT
PB4N	Push Button Momentary Narrow Stile
PB4N-2	Push Button Momentary Narrow Stile DPDT
PB4AN-2	Push Button Alternate Narrow Stile DPDT

Architectural Specifications

A. The Push Button shall be produced by an ISO 9001 certified manufacturer.

B. The Push Button shall be a compact Stainless Steel - 630/US32D vandal resistant 5/8" diameter button with an outside 1" diameter Stainless Steel - 630/US32D anti-tamper sleeve.

C. The Button shall have a Bi-color (red/green) LED as an indicator.

D. The LED indicator shall operate on 12 or 24VDC (field selectable).

E. The switch shall have 4Amp rated SP/DT contacts and adding the suffix "2" upgrades the contacts to DP/DT.

F. The switch shall be available in momentary or alternate action, with a Stainless Steel - 630/US32D single gang face plate or Stainless Steel - 630/US32D narrow stile face plate for mullion mounting.