


MODEL PB5	A	B	C	D	DEPTH
	4.5	2.75	.625	1.375	3

NOTE: FASTENERS NOT SHOWN ALL DIMENSIONS IN INCHES.

PUSH BUTTON - MODEL PB5

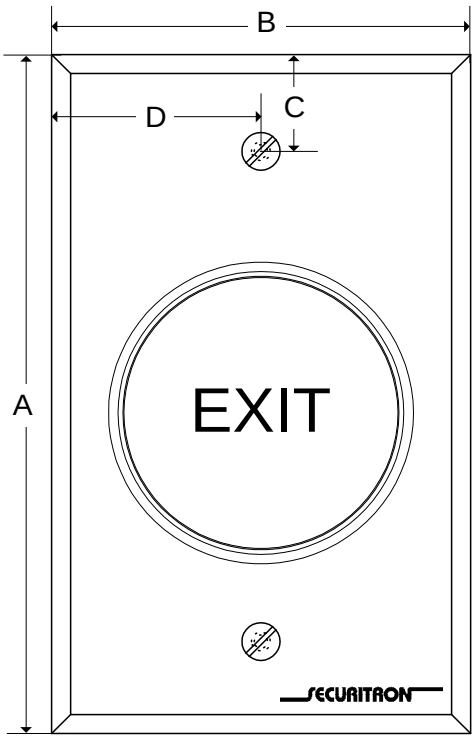

Features

- Stainless steel single gang face plate
- 2" Diameter red button
- 10 amp contacts
- DPST (DPDT by adding wires in the field)
- Illuminated or non-illuminated

Operating Temperature
0 to 43C [32 to 110F]

How to Order

Part #	Description
PB5	Push Button 2" Round Red Momentary Illuminated
PB5E	Push Button 2" Round Red Momentary Non-Illuminated

© 2015, Hanchett Entry Systems, Inc., an ASSA ABLOY Group company.

PUSH BUTTON - MODEL PB5 (cont'd)

Architectural Specifications

A. The Push Button shall be produced by an ISO 9001 certified manufacturer.

B. The Push Button shall be a 2" diameter red industrial grade button with protective cowling.

C. The Button shall be labeled 'EXIT" and shall be red back lit using an incandescent bulb.

D. The LED shall operate on 12 or 24 VDC (field selectable).

E. The switch shall be DPST and rated at 10 Amps at 12 or 24 VDC.

F. The push button shall be mounted on a single gang Stainless Steel - 630/US32D face-plate.

G. The switch shall be available in momentary action in both illuminated and non-illuminated versions.