# Architectural Door Accessories

ASSA ABLOY

## PemkoHinge® Continuous Geared Hinges: Full-Mortise Hinges: Short Leaf Flush

The global leader in door opening solutions

### _FM_SLF

10C c UL us LISTED DOOR HINGE 76Y2 BHMA CERTIFIED

AVAILABLE FINISHES: **BL, C, D, G, PW, SN**


WIDTH: **5/16" (7.9 mm)**
(between frame edge and door edge)

CAP WIDTH: **25/32" (19.8 mm)**

HEIGHT: **1-11/16" (42.9 mm)**
(to flange/frame & door edge sides)

HEIGHT: **11/16" (17.5 mm)**
(flange to top of cap)

**BL** (Black Anodized) - special request only
**C** (Clear Anodized)
**D** (Dark Bronze Anodized)
**G** (Gold Anodized)
**PW** (Painted White) - special request only
**SN** (Satin Nickel Anodized)

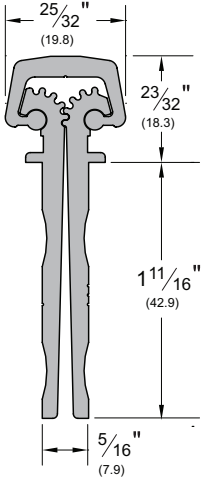


| |
|---|
| TITLE: |
| PREPARED FOR: |
| PREPARED BY: |
| DATE: |
| COMMENTS: |

Copyright © 2017, Pemko Manufacturing Co., an ASSA ABLOY Group company. All rights reserved.
Reproduction in whole or in part without the express written permission of Pemko Manufacturing Co. is prohibited.