Architectural Door Accessories

ASSA ABLOY

PemkoHinge® Continuous Geared Hinges: Full-Mortise Hinges: Short Leaf Inset

The global leader in door opening solutions

_FM_SLI

10C c UL us LISTED DOOR HINGE 76Y2 BHMA CERTIFIED

AVAILABLE FINISHES: **BL, C, D, G, PW, SN**

WIDTH: **5/16" (7.9 mm)**
(between frame edge and door edge)


CAP WIDTH: **25/32" (19.8 mm)**

HEIGHT: **1-11/16" (42.9 mm)**
(to flange/frame edge side)

HEIGHT: **1-19/32" (40.5 mm)**
(to flange/door edge side)

HEIGHT: **11/16" (17.5 mm)**
(frame edge flange to top of cap)

BL (Black Anodized) - special request only
C (Clear Anodized)
D (Dark Bronze Anodized)
G (Gold Anodized)
PW (Painted White) - special request only
SN (Satin Nickel Anodized)

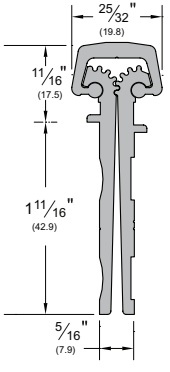

TITLE:
PREPARED FOR:
PREPARED BY:
DATE:
COMMENTS:

Copyright © 2017, Pemko Manufacturing Co., an ASSA ABLOY Group company. All rights reserved.
Reproduction in whole or in part without the express written permission of Pemko Manufacturing Co. is prohibited.