

Pemko




PemKonnnect™ Modular Hinge:
Full-Surface Hinges: Heavy-Duty

Experience a safer
and more open world

FSHD1-M



- AVAILABLE FINISHES: C, D
- WIDTH: 1-1/4" (31.8 mm)
(frame side - leaf)
- WIDTH: 1-3/8" (34.9 mm)
(door side - leaf)
- WIDTH: 2-7/8" (73.0 mm)
(total width of hinge)
- CAP WIDTH: 25/32" (19.8 mm)
- HEIGHT: 15/16" (23.8 mm)
(total height of hinge)

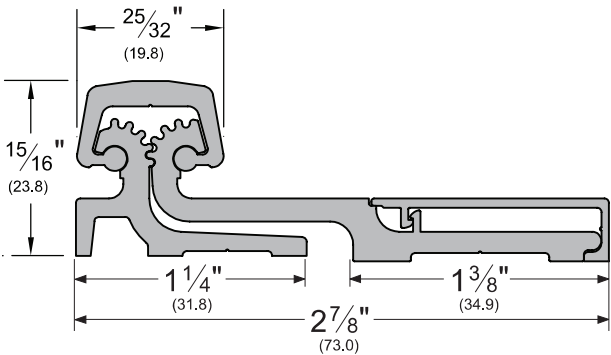

- C (Clear Anodized)
- D (Dark Bronze Anodized)

Available in 83" (FS83HD1-M) length standard.
For 95" length, add 12" (FS12HD1-M) section to 83" (FS83HD1-M) hinge.
The 12" segment **must be installed** between 40" and 43" hinge segments.

Combining multiple 12" segments to manufacture a custom length hinge will void any applicable product warranties and certifications.
Copyright © 2022, ASSA ABLOY Accessories and Door Controls Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

TITLE:
PREPARED FOR:
PREPARED BY:
DATE:
COMMENTS: