
Installation Instructions

SARGENT
ASSA ABLOY

Dummy Rail

PE8893 & PE8895 Exit Devices

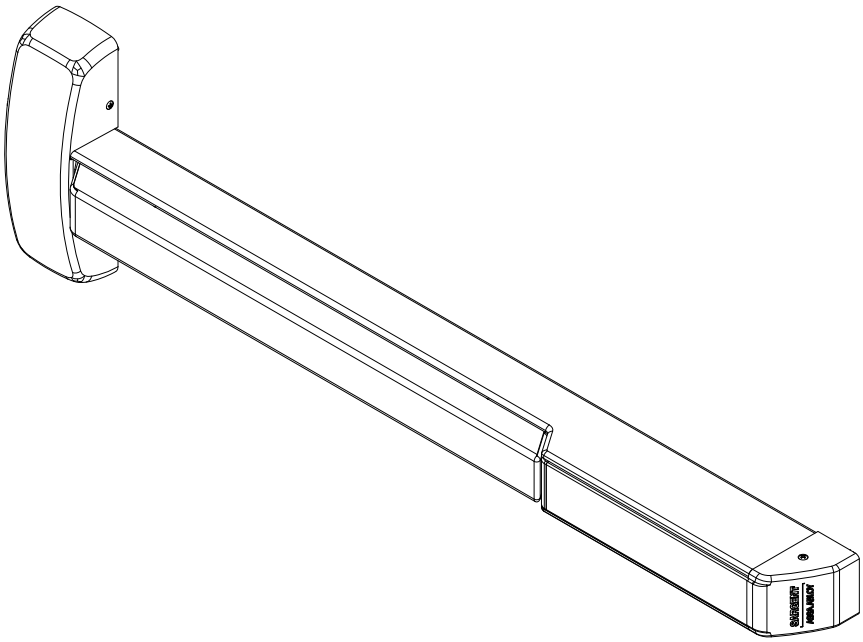

⚠ WARNING

This product can expose you to lead which is known to the state of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65warnings.ca.gov.

⚠ WARNING

Attention Installer: Improper installation may result in damage to the product and void the factory warranty.

1-800-727-5477 • www.sargentlock.com




Copyright © 2023, SARGENT Manufacturing Company. All rights reserved. Reproduction in whole or in part without the express written permission of SARGENT Manufacturing Company is prohibited. Patent pending and/or patent www.assaabloydss.com/patents.

A8320-1 5/23

Experience a safer and more open world

SARGENT
ASSA ABLOY

Screw Chart

DESCRIPTION	TOTAL QTY SUPPLIED	WHERE USED
 #10-24 X 3/4" FLAT HEAD MACHINE SCREW	4	(4) CHASSIS CORNER MOUNTING HOLES (METAL DOOR)
 #10 X 1-1/4" FLAT HEAD WOOD SCREW	4	(4) CHASSIS CORNER MOUNTING HOLES (WOOD DOOR)
 #10-24 X 3/4" ROUND HEAD MACHINE SCREW	2	(2) REAR MOUNTING PLATE (METAL DOOR)
 #10 X 1-1/4" ROUND HEAD WOOD SCREW	2	(2) REAR MOUNTING PLATE (WOOD DOOR)
 #8-32 X 5/16" W/ #6 OVAL HEAD MACHINE SCREW	6	(4) CHASSIS COVER (2) END CAP
 1/4"-20 X 2-3/8" KNURLED FLAT HEAD MACHINE SCREW	2	(2) EXIT TRIM (IF USED)

Copyright © 2023, SARGENT Manufacturing Company. All rights reserved. Reproduction in whole or in part without the express written permission of SARGENT Manufacturing Company is prohibited. Patent pending and/or patent www.assaabloydss.com/patents.

A8320-1 5/23


Experience a safer and more open world

Dummy Rail

PE8893 Exit Device


Installation Instructions

1

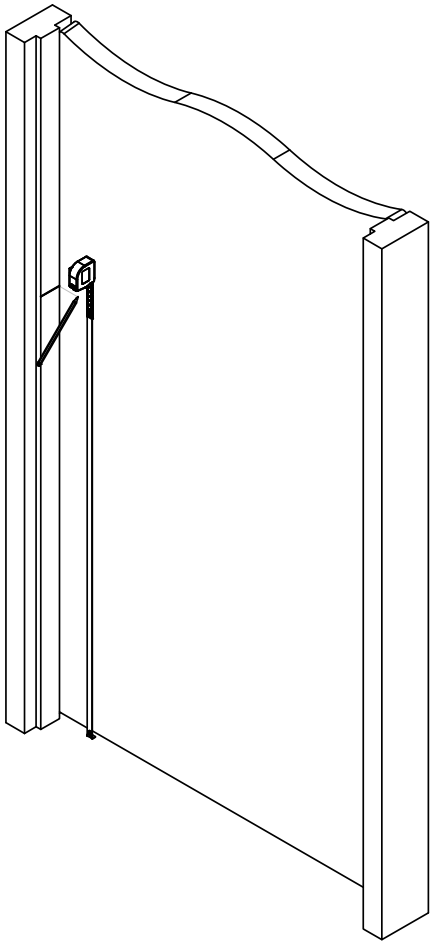

Measure 39-5/8” from the finished floor and mark door and frame

2

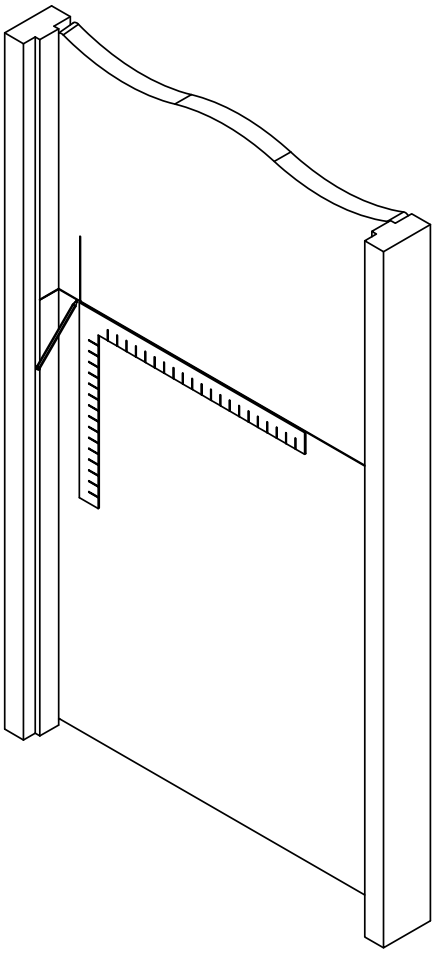

Using a square, create a horizontal and vertical centerline. Vertical centerline should be 2-3/4” off of the edge of the door or centered on the door stile.

Copyright © 2023, SARGENT Manufacturing Company. All rights reserved. Reproduction in whole or in part without the express written permission of SARGENT Manufacturing Company is prohibited. Patent pending and/or patent www.assaabloydss.com/patents.

A8320-1 5/23

Experience a safer and more open world


Dummy Rail

PE8893 Exit Device

Installation Instructions


SARGENT
ASSA ABLOY

3

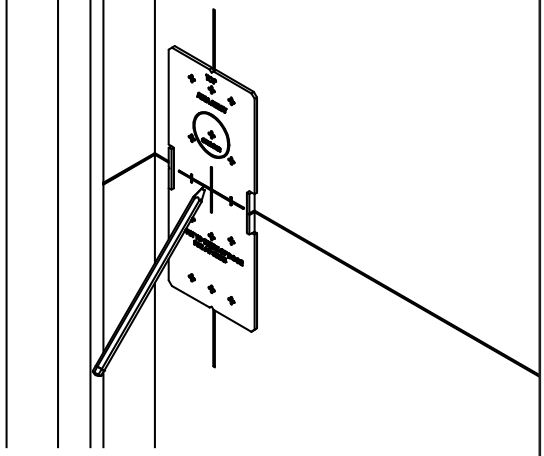


Align supplied plastic template with the centerlines. Mark chassis mounting holes.

4

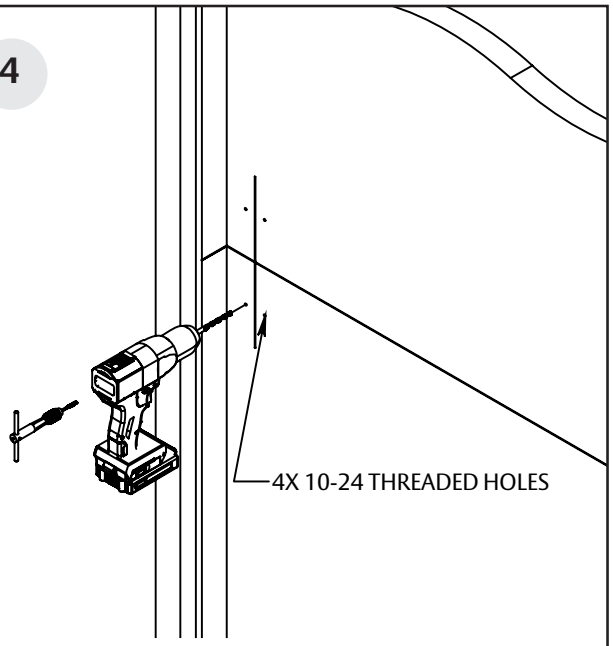


Prepare chassis mounting holes. Refer to supplied trim template as needed.

5

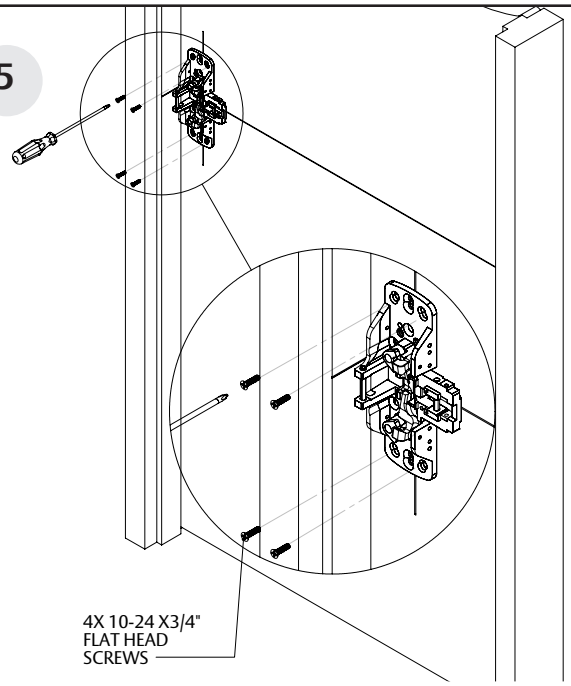

Install chassis using supplied mounting screws 10-24 x 3/4". **DO NOT FULLY TIGHTEN SCREWS.**

6

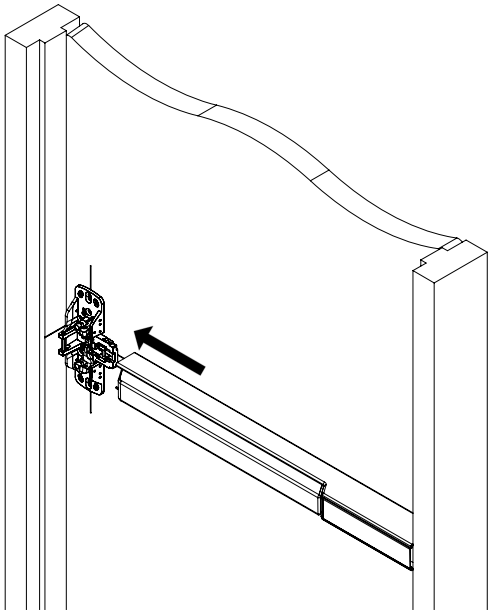

Slide rail assembly onto the chassis.

A8320-1 5/23

Copyright © 2023, SARGENT Manufacturing Company. All rights reserved. Reproduction in whole or in part without the express written permission of SARGENT Manufacturing Company is prohibited. Patent pending and/or patent www.assaabloydss.com/patents.

Experience a safer and more open world


Dummy Rail


PE8893 Exit Device

Installation Instructions

SARGENT
ASSA ABLOY


7

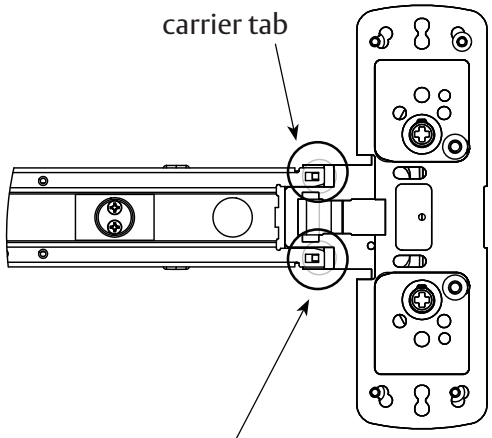


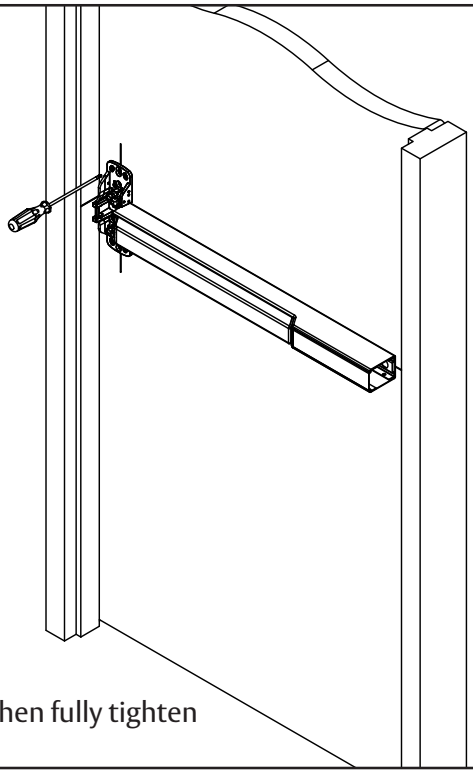

Ensure rail carrier tabs are aligned with the chassis, then fully tighten the chassis screws.

8

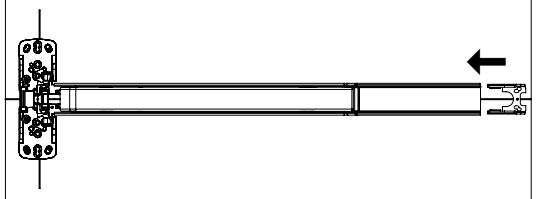

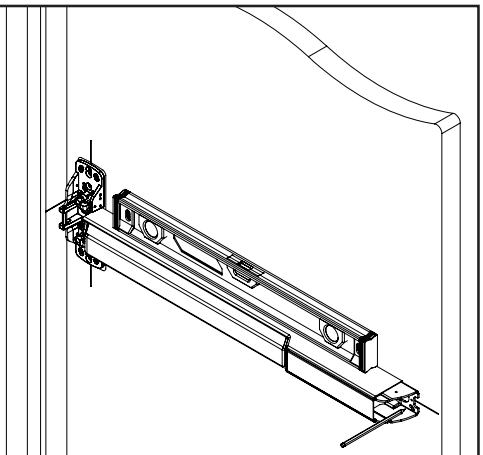

Insert the end cap bracket into the rail assembly. Level the rail and mark mounting holds using the bracket as a guide. Ensure rail overlaps door stile by 1/2".

1-800-727-5477 • www.sargentlock.com

Copyright © 2023, SARGENT Manufacturing Company. All rights reserved. Reproduction in whole or in part without the express written permission of SARGENT Manufacturing Company is prohibited. Patent pending and/or patent www.assaabloydss.com/patents.

Experience a safer and more open world


Dummy Rail

PE8893 Exit Device

Installation Instructions


SARGENT
ASSA ABLOY

9

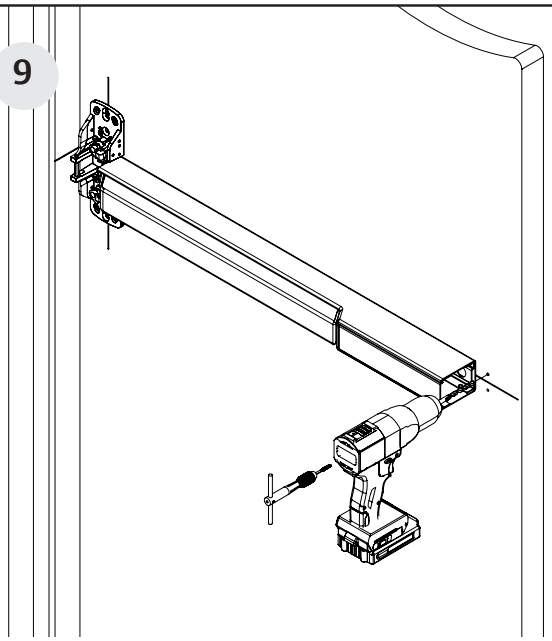


Drill and tap end cap bracket holes 10-24 (2 places).

10

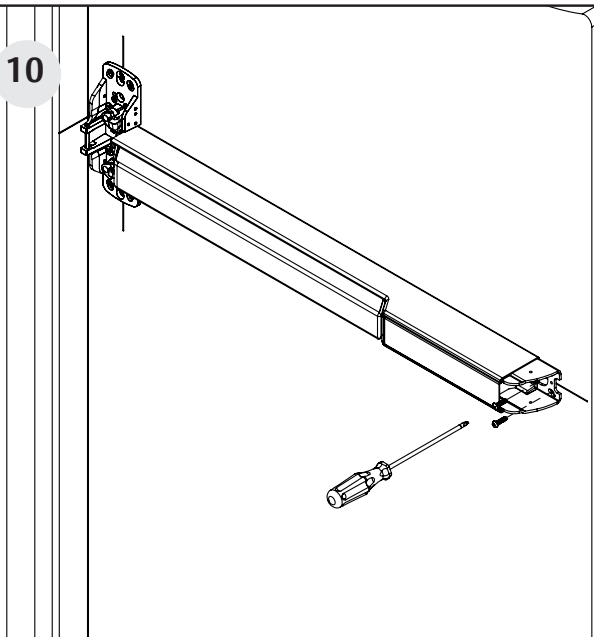

Install end cap bracket using round head Phillips 10-24 x 1" screws, supplied.

11

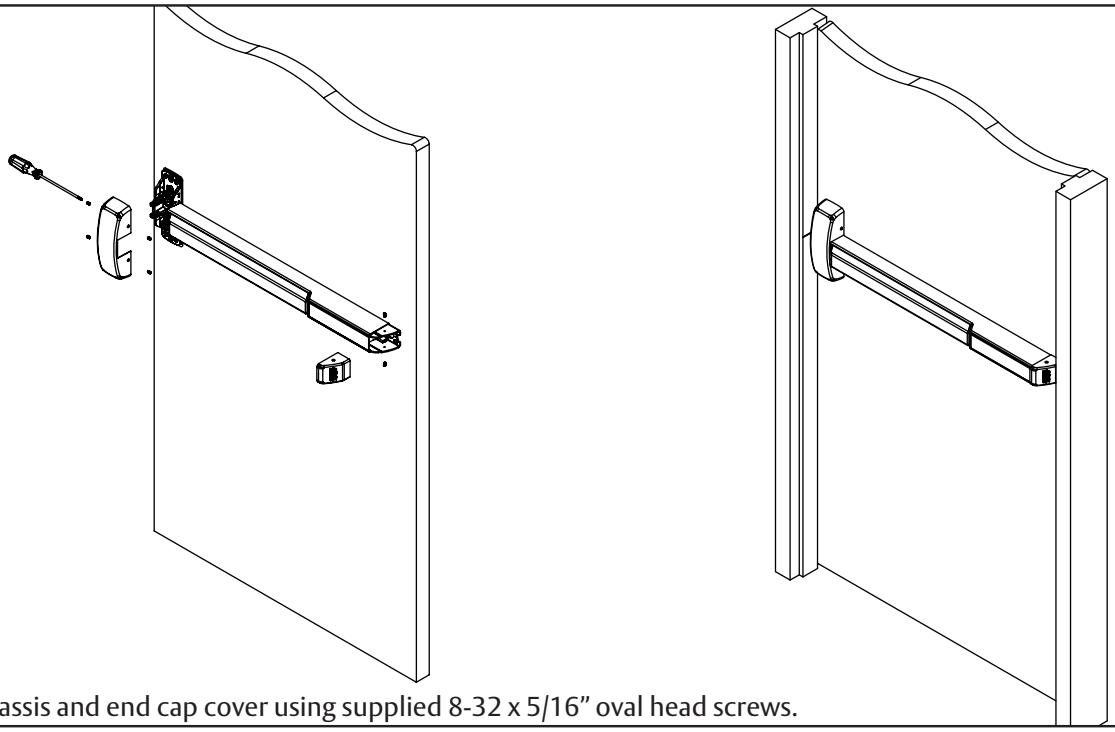

Install chassis and end cap cover using supplied 8-32 x 5/16" oval head screws.

Copyright © 2023, SARGENT Manufacturing Company. All rights reserved. Reproduction in whole or in part without the express written permission of SARGENT Manufacturing Company is prohibited. Patent pending and/or patent www.assaabloydss.com/patents.

A8320-1 5/23

Dummy Rail

PE8893 Exit Device

Installation Instructions

SARGENT®

ASSA ABLOY

1-800-727-5477 • www.sargentlock.com

Copyright © 2023, SARGENT Manufacturing Company. All rights reserved. Reproduction in whole or in part without the express written permission of SARGENT Manufacturing Company is prohibited. Patent pending and/or patent www.assaabloydss.com/patents.

Experience a safer
and more open world

SARGENT

ASSA ABLOY

1-800-727-5477 • www.sargentlock.com

Copyright © 2023, SARGENT Manufacturing Company. All rights reserved. Reproduction in whole or in part without the express written permission of SARGENT Manufacturing Company is prohibited. Patent pending and/or patent www.assaabloydss.com/patents.

A8320-1 5/23

Experience a safer
and more open world