
SARGENT
ASSA ABLOY

NOTES:

1. Backset is measured from centerline of bevel which is centerpoint of Door Thickness. "A" is adjustable for 2-3/8" (60.3) or 2-3/4" (69.3)
2. Dimensions given in inches and (mm)
3. Door prep applied to all functions.
4. Door and Frame prep with 2-3/4" (69.9) Backset and 1-1/8" (28.6) Wide Lock Front meets ANSI standard A156.115 (Steel) for Bored Deadlocks.

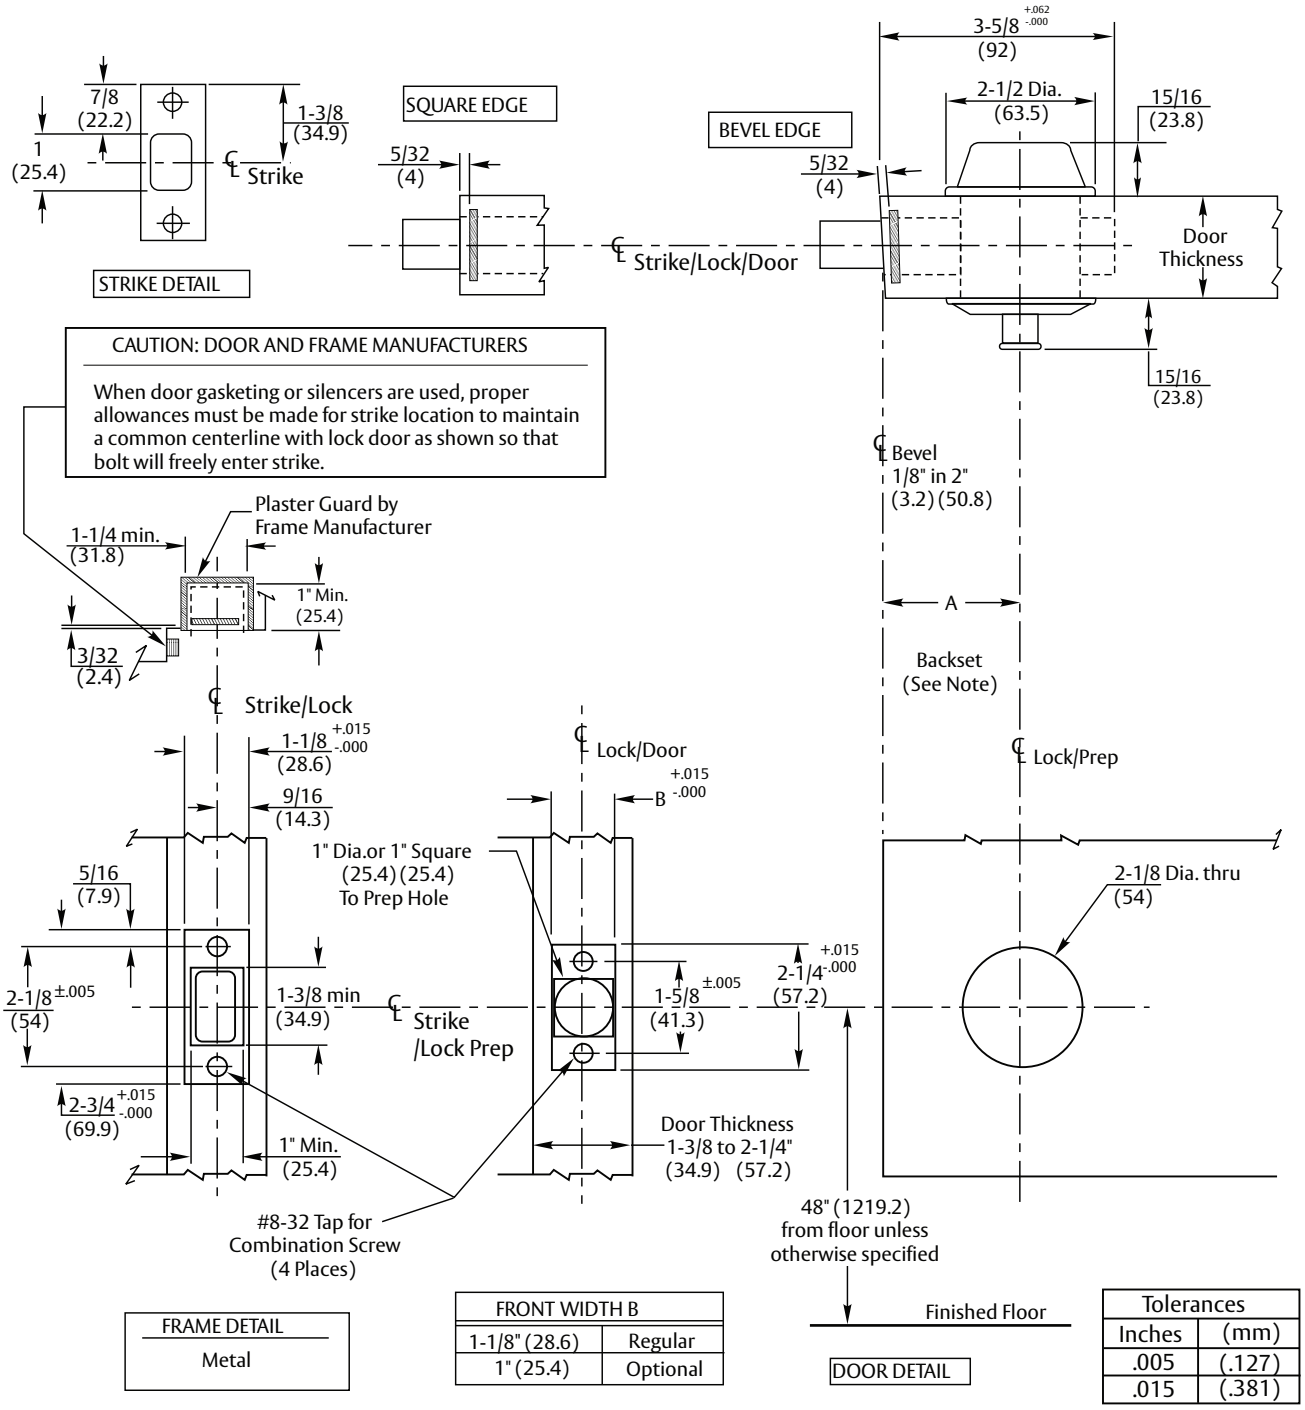

FRAME DETAIL
Metal

FRONT WIDTH B	
1-1/8" (28.6)	Regular
1" (25.4)	Optional

Tolerances	
Inches	(mm)
.005	(.127)
.015	(.381)

RESPONSIBILITY

Door and Frame Manufacturers are responsible for providing adequate construction or reinforcements for proper installation of hardware shown. All architectural builders hardware must be installed on properly reinforced doors and frames, regardless of the type, material, or method of construction.

Copyright © 2022 Sargent Manufacturing Company, an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of Sargent Manufacturing Company is prohibited.

460 Series Auxiliary Bored Lock

RELEASE DATE 08/22

TEMP. NO. 4755