SURFACE MOUNT ENCLOSURE

SBX-2G

Stainless Steel Surface Mount Box for 2-Gang Sub Stations

- INSTRUCTIONS -

The SBX-2G is a surface mount stainless steel enclosure designed for mounting Aiphone 2-gang sub stations. The enclosure is weather resistant and includes space inside for wiring. The unit mounts to a 1-gang box or ring, or mounts directly to a wall surface.

MOUNTING:

1. Mount SBX-2G to a 1-gang box or wall surface.
2. Connect supplied speed nuts to mounting ears.
3. Make wiring connections to Aiphone sub station.
4. Mount sub/door station to box using the screws provided.

PACKAGE CONTENTS:

- SBX-2G unit
- Packet of screws (4)
- Speed nuts (4)
- T-15 Torx bit (1)
- Instructions

COMPATIBLE AIPHONE SUB STATIONS:

LEF Series

LE-SS/A Vandal Resistant Stainless Steel Sub Station
LE-SSR Vandal Res. with Red Mushroom Call Button
LE-SSV Vandal Res. Stainless Steel Sub with pin hole camera
LE-DA Sub with Stainless Steel Faceplate


NEM Series

NE-SS/A Vandal Resistant Stainless Steel Sub Station
NE-SSR Vandal Res. with Red Mushroom Call Button
NE-SSV Vandal Res. Stainless Steel Sub with pin hole camera
NE-JA Sub with Stainless Steel Faceplate

IE Series:

IE-SS/A Vandal Resistant Stainless Steel Sub Station
IE-SSR Vandal Res. with Red Mushroom Call Button
IE-SSV Vandal Res. Stainless Steel Sub with pin hole camera
IE-JA Sub with Stainless Steel Faceplate

SBX-2G

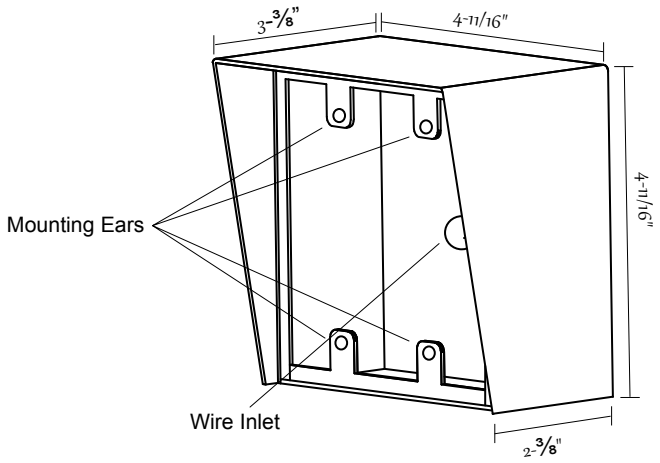

SPECIFICATIONS:

Mounting:	1-gang box or mount directly to wall surface
Material:	16 Gauge stainless steel
Color:	SBX-2G: Polished stainless steel
Mounting Hardware:	8x32 with T-15 Torx head
Dimensions (HxWxD):	4-11/16 x 4-11/16" x 3-⅜" (top); 2-⅜" (bottom)
Interior Depth:	2-3/16"

Aiphone Communication Systems
1700 130th Ave. N.E.
Bellevue, WA 98005
(425) 455-0510
FAX (425) 455-0071

Toll Free Technical Support:
1-800-692-0200
E-mail tech@aiphone.com