
# B250 Series

## Grade 2 Deadlatch

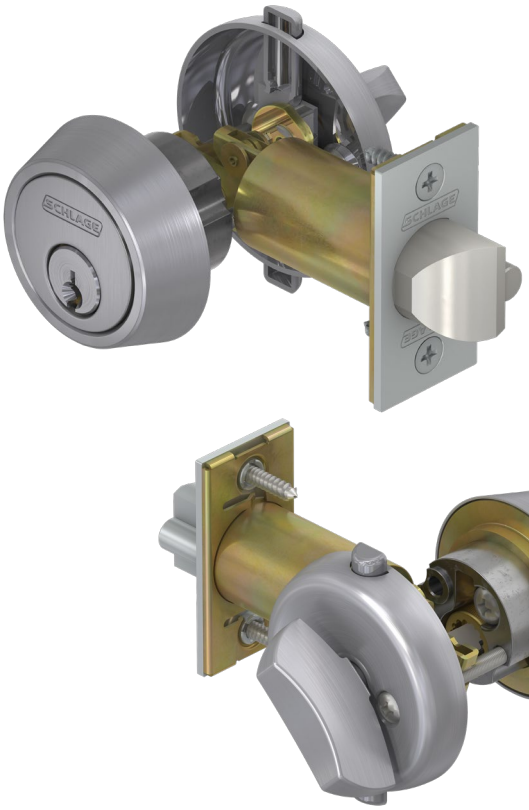

## OVERVIEW

Ideally suited for pool, apartment and condominium gates, utility panels and pipe chases, the Schlage B250 Series is tough, reliable and has a proven design that has been the industry standard for decades.


## FINISHES



605
Bright Brass



606
Satin Brass



609
Antique Bronze




613
Oil Rubbed Bronze



622
Matte Black




625
Bright Chrome



626
Satin Chrome

# LOCK FUNCTIONS


**Schlage** **ANSI**
**B250** **E0122**




**Single cylinder deadlatch**

- Deadlatch retracted by key outside or thumbturn inside
- Holdback feature standard
- Rotating thumbturn and activating holdback feature keeps latch retracted

**Schlage** **ANSI**
**B252** **E0112**




**Double cylinder deadlatch**

- Deadlatch retracted by key either side
- No holdback

Caution: Double cylinder locks on residences and any door, in any structure, which is used for egress are a life safety hazard in times of emergency and their use is not recommended. Installation should be in accordance with existing codes only.

# CYLINDERS

| Conventional cylinder options | |
|---|---|
| P6 | 6-pin Conventional, keyed 6 (standard) |
| P | 6-pin Conventional, keyed 5 |
| Z | SL 7-pin Conventional (A2 pinning) |
| L | Less Conventional |

| Full size interchangeable core (FSIC) cylinder options | |
|---|---|
| R | 6-pin FSIC |
| M | SL 7-pin FSIC (A2 pinning) |
| J | Less FSIC |
| T | Refundable FSIC construction core |

# SPECIFICATIONS

| | |
|---|---|
| **Trim** | |
| Material | Wrought or forged brass or bronze, or pressure cast zinc |
| Door thickness | 1-1/2" to 1-3/4" (38 mm to 44 mm) standard.<br>Available to 2-1/4" (57 mm), assembled to order. |
| **Deadlatch** | |
| Backset | Standard: 2-3/8" (60 mm)<br>Optional: 2-3/4" (70 mm) |
| Faceplate | 1-1/8" x 2-1/4" (29 mm x 57 mm) square corner, beveled.<br>Brass, bronze or stainless steel. |
| Bolt | Brass, 9/16" (14 mm) throw, deadlocking on keyed and exterior functions. |
| Strike | 1-1/8" x 2-3/4" (32 mm x 70 mm) with steel reinforcer and two 3" screws standard. |
| **Keying** | |
| Cylinder format | 6-pin Conventional (standard); also available in FSIC and 7-pin SL cylinder. |
| Keyway | Patented Everest 29 S123 (standard); also available in open, restricted, and Primus XP security levels with available master keying and construction keying. |
| **Attachment** | |
| | Three 3" screws metal dustbox to frame. 1/4" machine screws through bolt to firmly anchor lock to door. |
| **Warranty** | |
| | 3-year limited mechanical warranty. See price book for details. |
| **Certifications** | |
| ANSI/BHMA | A156.36-2010, Grade 2. BMHA certified. |
| Federal | BAA compliant. |
| Other | ADA compliant. |



© 2024 Allegion plc
013207, Rev. 06/24