S Series

Schlage S Series levers are engineered for long life and optimum durability. Easy to install, service and maintain, an S Series lever can help you keep people and property secure.

Pictured here: S Series Neptune lever shown in 626 satin chrome



S Series lever designs

Jupiter (JUP)



Symbol: JUP
Material: Pressure cast zinc

Neptune (NEP)



Symbol: NEP
Material: Pressure cast zinc

Saturn (SAT)



Symbol: SAT
Material: Pressure cast zinc


Flair (FLA)



Symbol: FLA
Material: Pressure cast zinc

Tactile warning

Milled






Order as follows:
8SA for Saturn

Only available on outside lever, unless otherwise specified

All designs shown in 626 satin chrome


- = Standard cylinder.
- = FSIC full size interchangeable core option.
- = Complies with ADA accessibility guidelines.
- = Meets California code for ½" or less return to the door.
- = Extended factory lead time.

Lever finishes

	 **605** Bright brass	 **606** Satin brass	 **609** Antique brass	 **613** Oil rubbed bronze	 **619** Satin nickel	 **625** Bright chromium plated	 **626** Satin chromium plated
S Series locks							
Flair	·	·	·	·	·	·	·
Jupiter	·	·		·	·	·	·
Neptune	·	·		·	·	·	·
Saturn	·	·	·	·	·	·	·

Door handing

With the exception of the Flair lever design, the S Series lock is reversible. Hand information is necessary to ensure proper cylinder orientation in keyed functions, and finish of latchbolt and strike for locks that are to be installed on reverse bevel doors. Follow the diagram to correctly determine the hand of the door.

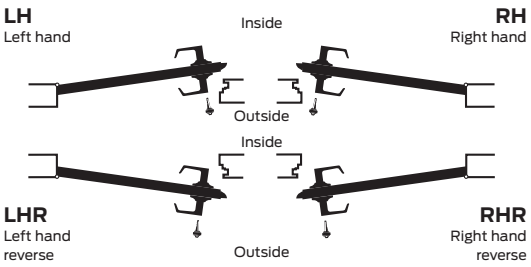

ADA-compliant products

In compliance with the American National Standards Institute (ANSI A117.1) and the Americans with Disabilities Act (ADA), Schlage Lock Company offers a wide selection of locks designed for the needs of the physically challenged. This act is designed to provide protection for people with disabilities.


Product information and specifications contained in this catalog are subject to change without notice. Please consult the factory.

S Series lock functions

ANSI A156.2 Series 4000 Grade 2

Standard cylinder

FSIC - full size interchangeable core option

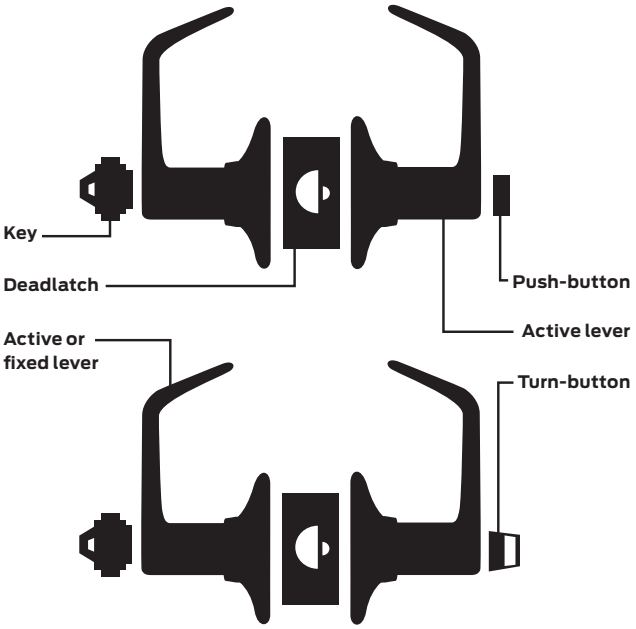


Non-keyed functions

Schlage **S10D** | ANSI **F75**

Passage latch

- Both levers always unlocked

Outside Inside




Schlage **S40D** | ANSI **F76**

Bath/bedroom privacy lock

- Push-button locking
- Can be opened from outside with small narrow tool
- Turning the inside lever releases button

Outside Inside



Keyed functions

Schlage **S170** | ANSI **–**

Single dummy trim

- Dummy trim for one side of door
- Used for door pull or as matching inactive trim

Outside/Inside




Schlage **S70PD** | ANSI **F84**

Classroom lock

- Outside lever locked and unlocked by key
- Inside lever always unlocked

Outside Inside




Schlage **S80PD** | ANSI **F86**

Storeroom lock

- Outside lever fixed
- Entrance by key only
- Inside lever always unlocked

Outside Inside




Schlage **S51PD** | ANSI **F81**

Entrance lock

- Outside lever locked and unlocked by key or by turn-button on inside lever
- Inside lever always unlocked

Outside Inside



Standard cylinders


Standard cylinders are available in Classic keyways or in patented Everest 29 keyways. Specify keyway to differentiate between Everest 29 and Classic. Example: C (Classic) vs. S123 (Everest 29).


Cylinders for keyed levers - options

- 6-pin conventional cylinder (standard)
- Primus high security cylinder
- Primus UL437 Listed high security cylinder

Available in 606 and 626 finish only.
Everest 29 S123 keyway standard for commercial; C keyway standard for residential.


Sleeve S605-192 included.



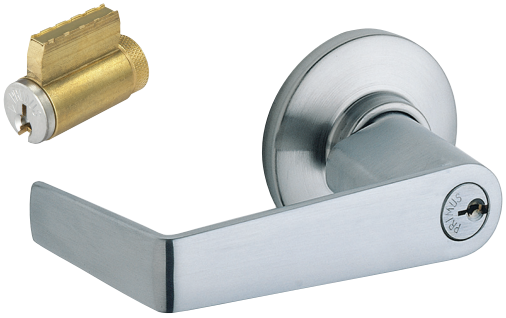

New Everest SL cylinder

- A full-size KIL cylinder that pins to the Schlage SFIC keyways
- Uses pick resistant L pins
- SFIC system owners can gain geographic exclusivity with Primus XP
- Achieves about 57,000 more combinations than a 6-pin system



Everest SL cylinder

Full size interchangeable core 8

Schlage interchangeable core (IC) locksets allow immediate rekeying at the door simply by using the special control key to replace the core in seconds.

FSIC locksets are available in Jupiter, Neptune and Saturn designs.

Full size interchangeable cores - options
(for JD suffix locksets)

- Conventional core
- Primus high security core

Available in 606 and 626 finish only.
Everest 29 S123 keyway standard for commercial; C keyway standard for residential.





Full size interchangeable cores can be integrated into any 5 or 6-pin Schlage key system with no adverse affects on keying capacity.

Latches

The standard universal backset deadlatch fits both 2 3/8" (60 mm) and 2 3/4" (70 mm) backsets. They are adjustable for flat or beveled edge doors and have a 1/2" (13 mm) throw. Orders for complete locks are provided with a G506-815 sleeve for 7/8" diameter latches installed in doors with 1" (25 mm) edge bore. All latches have 1" x 2 1/4" (25 mm x 57 mm) square corner fronts. Standard latches are shown in bold type.


Note: Failure to use the below referenced latches and fire cup, included with the lockset, will invalidate the UL Listing.

Deadlatches - options


Backset	Faceplate description	Hsg dia
2 3/8" or 2 3/4"	**1" x 2 1/4" Square corner***	**7/8"**
	1" x 2 1/4", 1/4" Radius round corner	7/8"
5"	1" x 2 1/4" Square corner*	7/8"


*Latches include A501-878 faceplate adapter for 1 1/8" face.

Square corner deadlatch
16-203




Round corner deadlatch
16-204





Latch front adapter
A501-878

Used to adapt 1" (25 mm) wide square front faceplates to 1 1/8" (29 mm) wide door preparations. Furnished in black plastic. Order in multiples of 100.



Sleeve
G506-815

Used on 7/8" (22 mm) diameter latch housings in 1" (25 mm) edge bore. Furnished standard with complete locks.

Door Reinforcement

Schlage reinforcing units help prevent the collapse of hollow metal doors when locksets are tightly mounted.



A501-566
1 3/4" (44 mm) doors

A501-565
1 3/8" (35 mm) doors


Strikes

All Schlage strikes are furnished complete with screws. The 10-001 standard S Series strike has a 1 1/8" (29 mm) lip. When ordering separately, specify quantity, product number, finish, and lip length. Standard strike is shown in bold type.


Strikes - options

- 1", 1 1/8" (Std), 1 1/4", 1 1/2", 1 3/4", 2" (25 mm, 29 mm, 32 mm, 38 mm, 44 mm, 51 mm - 1 1/8" x 2 3/4" (29 mm x 70 mm) square corner, standard
- 1 1/8" (29 Mm) - 1 1/8" x 2 3/4" (29 mm x 70 mm) 1/8" (3 mm) radius, round corner
- 1 3/16", 1 3/8" (30 mm, 35 mm) - 1 1/4" x 4 7/8" (32 mm x 124 mm) ANSI
- 1 1/8" (29 mm) - 1 5/8" x 2 1/4" (41 mm x 57 mm) full lip, square corner
- 1 1/8" (29 mm) - 1 5/8" x 2 1/4" (41 mm x 57 mm) full lip, 1/4" (6 mm) radius, round corner
- Box, ANSI


T-strike – standard
10-001
1 1/8" x 2 3/4" x 3/32"
(29 mm x 70 mm x 2 mm)




ANSI strike
10-025
1 1/4" x 4 7/8" x 3/32"
(32 mm x 124 mm x 2 mm)



Full lip - square corner
10-026
1 5/8" x 2 1/4" x 3/32"
(41 mm x 57 mm x 2 mm)



Full lip - round corner
10-027
1 5/8" x 2 1/4" x 3/32"
(41 mm x 57 mm x 2 mm)




Rabbeted latch and strike kit

Rabbeted latch and strike kit finishes: 605, 626.

This kit adapts square corner latches and strikes for 1/2" (13 mm) rabbeted door and frame preparations.

Rabbeted latch and strike kit
39-030



Specifications

Handing:
Not handed, except Flair design.

Door thickness:
1 3/8" to 2" (35 mm-51 mm) except S40D: 1 3/8" to 1 7/8" (35 mm-48 mm)

Backset:
Universal backset latches standard, fit either 2 3/8" (60 mm) or 2 3/4" (70 mm). 5" (127 mm) optional.

Fronts:
Steel. 1" x 2 1/4" (25 mm x 57 mm) square corner, beveled, for 2 3/4" backset standard.

Lock chassis:
Tubular construction. Zinc with steel cover.

Latch bolt:
Brass, chrome plated, 1/2" (13 mm) throw, deadlocking.

Exposed trim:
Levers are zinc base, plated to match finish symbols. Roses, latch faceplates and strikes are wrought brass or bronze.

Strike:
T-strike 1 1/8" x 2 3/4" (29 mm x 70 mm) x 1 1/8" (29 mm) lip to center with box standard. Optional strikes, lip lengths and ANSI strike box available.

Cylinder and keys:
Commercial: 6-pin patented Everest 29 S123 keyway standard with two nickel silver keys per lock.
Residential: 6-pin C keyway, keyed 5-pin.

Keying options:
Interchangeable core available, for Primus Xp cylinder, order locks less cylinder and order Primus Xp cylinder separately. Master keying, grand master keying, and construction keying.

Warranty:
Commercial: Three-year limited.

Certifications

ANSI
Meets or exceeds A156.2 Series 4000, Grade 2 strength and operational requirements.

Federal:
Meets FF-H-106C.
California State Reference Code:
(Formerly Title 19, California State Fire Marshal Standard)
All levers with a return to door of 1/2" (64mm) or less comply.

UL / cUL:
All locks listed for A label single doors, 4' x 8'. Letter F and UL symbol on latch front indicate listing. UL437 Listed locking cylinder optional: specify less cylinder and order Primus 20-500 Series cylinder separately.

ADA compliant:
Schlage Lock Company offers a wide selection of locks designed to meet the Americans With Disabilities Act.