



Strikes


Models 10-025, 10-072, 10-087, 10-144, 10-145

Jamb Type: Wood

Style: ANSI Standard for 1 3/4" (44 mm) doors

Standard for: AL-Series (10-025) | D-Series Knobs (10-025) | ND-Series Lever (10-025) | L/LV9000-Series (10-072) | L9000-Series HSLR (10-144, 10-145)

Optional for: A-Series | B250-Series | F-Series | S-Series

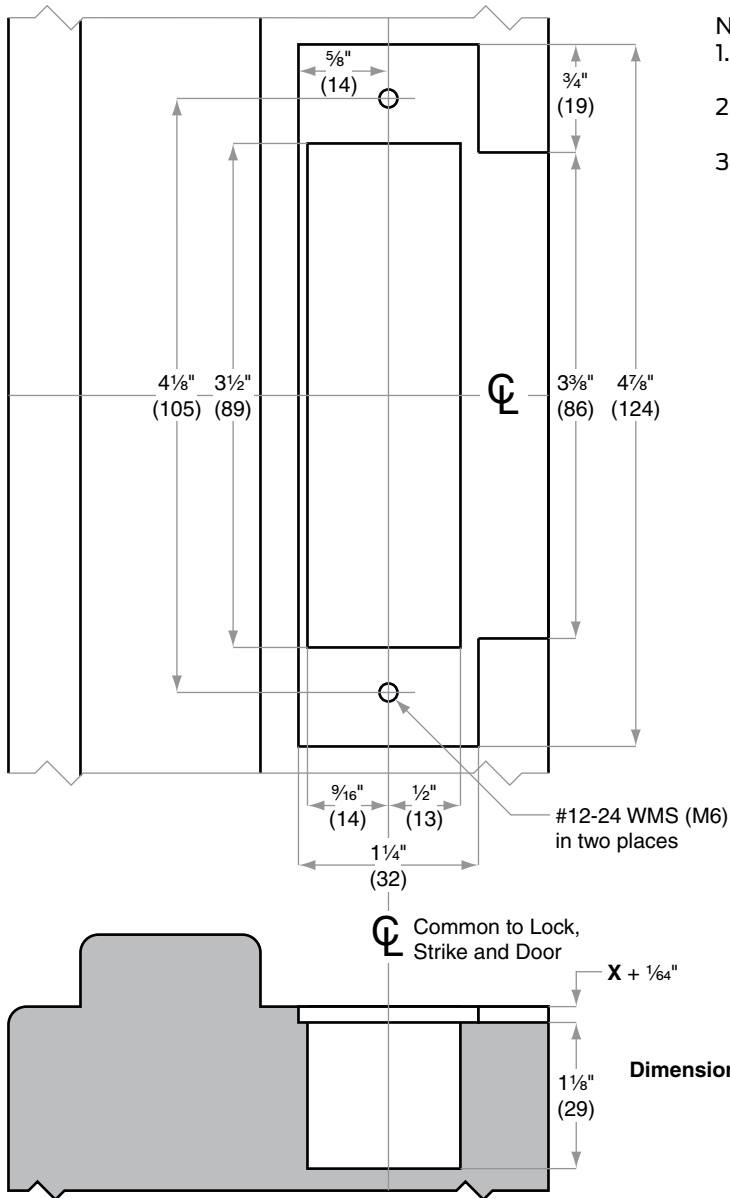

NOTE:

1. When reinforcement plate is specified, mortise additional 1/8" (3) to Dimension X
2. Strike location on frames must be adjusted for thickness of door silencers when used
3. For case and strike dimensions see Template L1. For HSLR trim, see Template L4.

Dimension X: 10-025: 3/32" (2) when strike box not specified
 10-072 and 10-087: 5/32" (4) for strike box, detached

Dimensions shown in parentheses () are in millimeters.

Door preparation template