

XE360™ Series

Wireless Exit Trim



Note: Exit device sold separately

Overview

Building upon the innovation and reliability of Schlage electronic locks, the XE360 Series is the next generation of wireless locks from this trusted brand. The wireless exit trim is compatible with rim and surface vertical rod exit devices from Falcon and Von Duprin, and suites flawlessly with the XE360 tubular and mortise chassis to ensure an aesthetically consistent property.

XE360 currently works within No-Tour or offline access control systems. Credential support includes smart, Bluetooth and NFC mobile¹.

The open architecture design of the XE360 allows it to be managed by Allegion software or be integrated into popular physical access control and Proptech systems through our [PACS Alliance](#) program. This enables customers to choose what best fits their requirements now and transition to another solution at any time.

Encryption Key & Credential Interoperability

- Hardware configured with our default encryption key or custom key developed by Schlage Custom Encryption Key Service (SCEKS) including NXP and NFC
- Schlage MIFARE® DESFire® and MIFARE Classic® credentials
- Schlage Mobile Bluetooth® Credential
- Other competitive credentials

Schlage Credential Services

- CardTrax™ credential format sequencing service offering industry standard formats
- Custom format development


Features & Benefits

- Next level design inside and out
 - Available for rim and surface vertical rod exit devices from Falcon and Von Duprin
 - Utilizes a modular adapter for simple transitions to a wide variety of exit devices
 - Credential support includes Schlage MIFARE®, Bluetooth® and NFC mobile¹
 - Advanced encryption keeps data and communications safe
 - Wireless configuration from connected smartphones and tablets
 - No-Tour or offline system capability
 - Ready for the future with the innovative Flex Module™ that allows for communication type, memory and encryption upgrades
 - Exceeds Grade 1 testing for exceptional quality and reliability
 - Open architecture – interoperable and simple for software alliances to integrate
 - Works seamlessly with other Schlage wireless locks, including Schlage Control²
 - Uniquely concealed key override standard on all locks
1. Use of mobile credential is dependent on availability of compatible mobile credential
 2. Check with your Proptech or PACS provider for specific support

CYBERSECURITY


Learn about Allegion's commitment

Exterior

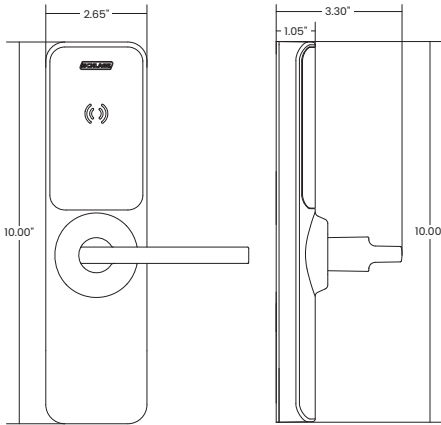


Interior

Rim



Surface vertical rod (SVR)

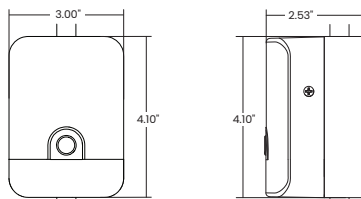

XE360 Wireless Electronic Lock Specifications

| | |
|---|--|
| Users | 2,000 ¹ |
| Audits | 2,000 ¹ |
| Visual communications | LED (red, amber, green, blue) |
| Audible communications | Yes, field configurable |
| Communication and encryption standards – lock | Bluetooth® Low Energy (version 5) Advanced Encryption Standard (AES), 128- and 256-bit |
| Communication and encryption standards – mobile credentials | Bluetooth® Low Energy: AES 256-bit using CBC & ECDSA 256 |
| Credential verification time | Smart: ≤ 1 second Mobile: mobile device dependent |
| System interface | Via Bluetooth using the ENGAGE mobile app compatible with iOS and Android |
| Battery life ² | Up to two 2 years 4 AA batteries, included |
| Operating temperature | Exterior: -31° to 151°F (-35° to 66°C) Interior: 32° to 120°F (0° to 49°C) |
| Operating humidity | 0 - 100% non-condensing |
| Certifications | ANSI/BHMA A156.3-2020 Grade 1; ANSI/BHMA A156.25-2023 Locked Outdoor Type; ANSI/BHMA A156.5-2020; UL 294; ULC 60839; UL 10C 3-hour; CAN/ULC S104 3-hour; FCC Part 15; Industry Canada (IC); Industry Canada (IC)-RSS210; ADA Compliant ³ ; RoHS; REACH; TAA |

Functionality⁴

- With Indicator (I)
 - Storeroom
- With Button (B)
 - Office
 - Privacy
 - Apartment

Available Status Signals⁴


- Battery level
- Door position
- Lock/unlock
- Request-to-exit⁵

Connectivity Options

- Mobile (Bluetooth at the lock)
- No-Tour⁶

Note: Door Position Sensor is recommended for privacy and apartment functions

Profile - with Falcon 25 Rim

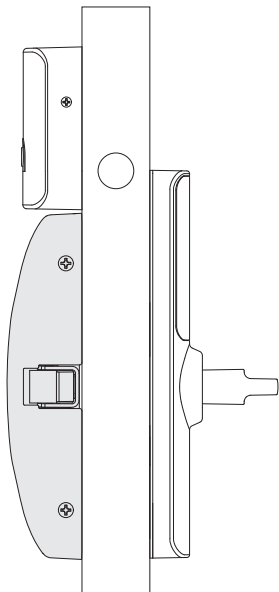

1. Maximum storage capacity of lock; can vary by access control software
2. Assuming default settings, 40 actuations per day
3. See 'Lever Styles' section for available options
4. Consult your access control software provider for specific scope of support
5. Exit compatibility - supports both Low Current (RX-LC) and Normal versions (RX) of REX switch
6. With MT20W and smart credential or mobile credential (consult your access control software provider for specific support)

XE360 Exit Trim Mechanical Specifications

| | |
|----------------------------------|---|
| Chassis | Exit trim, wide stile |
| Handing | On-site handing with included hex key |
| ANSI standard (Meets or exceeds) | ANSI/BHMA A156.13-2020 Grade 1 ANSI/BHMA A156.25-2023 Locked outdoor type ANSI/BHMA A156.5-2020 |
| Door thickness | 1-3/4" (44mm) |
| Backset | Defined by exit device |
| Latchbolt | Defined by exit device |
| Strike | Defined by exit device |
| Levers | Zinc |
| Stile width | Minimum 4-1/4" (108mm) |
| Materials | All-metal chassis and escutcheon; exterior polycarbonate elements |
| Cylinder and keys | Schlage Classic C keyway, Conventional 6-pin cylinder with two keys |

Reader Specifications

| | |
|--|--|
| Credential technologies | Smart (13.56 MHz), Bluetooth Low Energy (LE) (2.4 GHz), and Near Field Communication (NFC) |
| Standards | ISO standard 15693 and ISO 14443 |
| Read range | Smart: up to .5" Bluetooth® Low Energy: up to 15' NFC: mobile device dependent |
| Smart credential support | Secure application area: Schlage MIFARE Classic®, Schlage MIFARE® DESFire® EV1/EV2/EV3 CSN only: HID iCLASS®, HID iCLASS SE®, MIFARE Classic/DESFire |
| Mobile credential support ¹ | Schlage Mobile Bluetooth Credential, Integrated PACS mobile credential with Bluetooth, Apple Wallet® NFC student ID and employee badge; Google Wallet™ NFC student ID and employee badge |

Exit Device Compatibility

The XE360 exit trim is currently compatible with rim and surface vertical rod styles of the following exit devices:

- Falcon 25
- Von Duprin 98/99; XP98/99 rim
- Von Duprin 22

Chassis Options

The XE360 Series portfolio offers tubular, mortise, mortise deadbolt and exit trim solutions to fit the needs of most applications.

Key Override

Key override is standard on all XE360 locks. The unique design conceals the cylinder in the bottom edge of the lock to preserve the sleek look on the door while still allowing emergency access using a key.



¹ Dependent on PACS provider capabilities. Visit us.allegion.com/alliances for more information

Ordering Information

XE360 - EW - 25R - OF - I - SM - LAT - 626 - P6 - C - 134

| | | | | | | | | | | |
|--------|---------|-------------------|-------|----------|--------|-------------|--------|--------------|--------|----------------|
| Series | Chassis | Exit Trim Adapter | Class | Function | Reader | Lever Style | Finish | Key Cylinder | Keyway | Door Thickness |
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 |

Selections correspond with the numbers above. See price book for specific configuration options.

3 Exit Trim Adapter

| | |
|-----|---------------------------------------|
| 25R | Falcon 25 rim |
| 25S | Falcon 25 surface vertical rod |
| 99R | Von Duprin 98/99 or XP98/99 Rim |
| 99S | Von Duprin 98/99 surface vertical rod |
| 22R | Von Duprin 22 rim |
| 22S | Von Duprin 22 surface vertical rod |

5 Function

| | |
|---|-----------|
| I | Indicator |
| B | Button |

6 Reader

| | |
|----|---------------------------------|
| SM | Smart; Bluetooth and NFC mobile |
|----|---------------------------------|

7 Lever Style

| | |
|-------|---------------------------|
| BRW | Broadway |
| LAT | Latitude |
| NEP | Neptune |
| LON-E | Longitude-extended length |

8 Finish

| | |
|-----|--------------|
| 619 | Satin Nickel |
| 622 | Matte Black |
| 626 | Satin Chrome |

Note: Interior finish of Exit Trim device will always be 622 Matte Black

9 Key Cylinder

| | |
|----|-----------------------------|
| P6 | Schlage Conventional, 6-pin |
|----|-----------------------------|

10 Keyway

| | |
|---|-------------------------|
| C | Schlage Classic Obverse |
|---|-------------------------|

11 Door Thickness

| | |
|-----|-------------|
| 134 | 1-3/4" only |
|-----|-------------|

Lever Styles



Broadway

Latitude

Neptune (Sparta)

Longitude - Extended Length

Extended length lever is designed to lower required operational force and improve rotational grip for higher accessibility.

Finishes



619
Satin Nickel

622
Matte Black

626
Satin Chrome