
INSTALLATION INSTRUCTIONS
MODELS TS-6, TS-7, TS-8, TS-9

U.L. FILE SA32686

LEDS AVAILABLE ONLY ON TS-6 AND TS-8
LED CURRENT RATING
7 MA. @ 12 VDC, 15 MA. @ 24 VDC

REAR VIEW OF PLATE

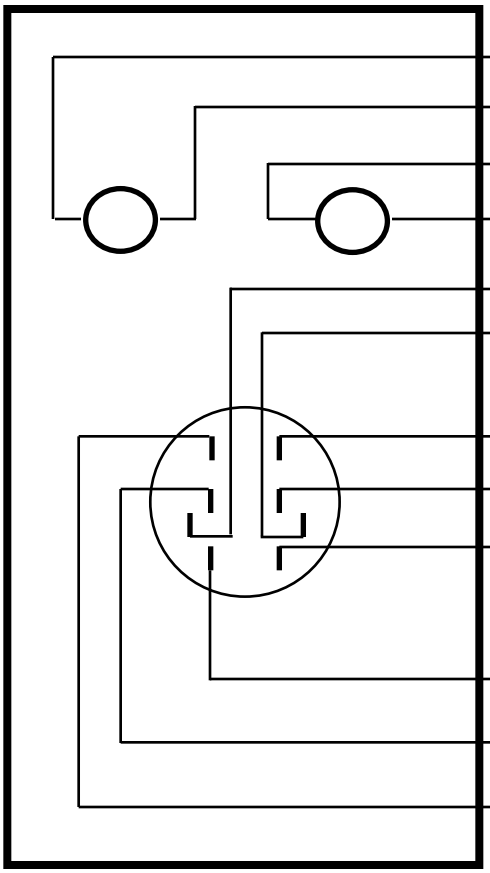

BLACK LEAD NEGATIVE
RED LEAD POSITIVE — **GREEN LED**

BLACK LEAD NEGATIVE
RED LEAD POSITIVE — **RED LED**

YELLOW LEAD (+) POSITIVE
BLACK LEAD (-) NEGATIVE

SWITCH LED
9 MA. @ 12 OR 24 VOLTS DC

RED LEAD N/C CONTACT
BLUE LEAD N/O CONTACT
WHITE LEAD COM CONTACT

SWITCH 1

SWITCH CONTACTS
RATED 2 A. @ 12 - 28 VDC

WHITE LEAD COM CONTACT
BLUE LEAD N/O CONTACT
RED LEAD N/C CONTACT

SWITCH 2

MOUNT WALLPLATE IN A VERTICAL POSITION

MODELS TS-6, TS-7, TS-8 & TS-9 SHOULD BE MOUNTED IN A 2.5 INCH DEEP ELECTRICAL BOX

FOR 24 VOLT SWITCH LED OPERATION

ADD 100O OHM 1/2 WATT RESISTOR IN SERIES WITH YELLOW LEAD. INSULATE RESISTOR TO PREVENT SHORTING.

ALARM CONTROLS CORPORATION

19 BRANDYWINE DRIVE P.O. BOX 280
DEER PARK, NY 11729
PH: 1 800 645-5538 1 631 586-4220 FAX ; 1 631 586-6500
WWW.ALARMCONTROLS.COM EMAIL: INFO@ALARMCONTROLS.COM

DOC. D-004 REV. A
7/08