
VALUESERIES® V40 SERIES (RIM)

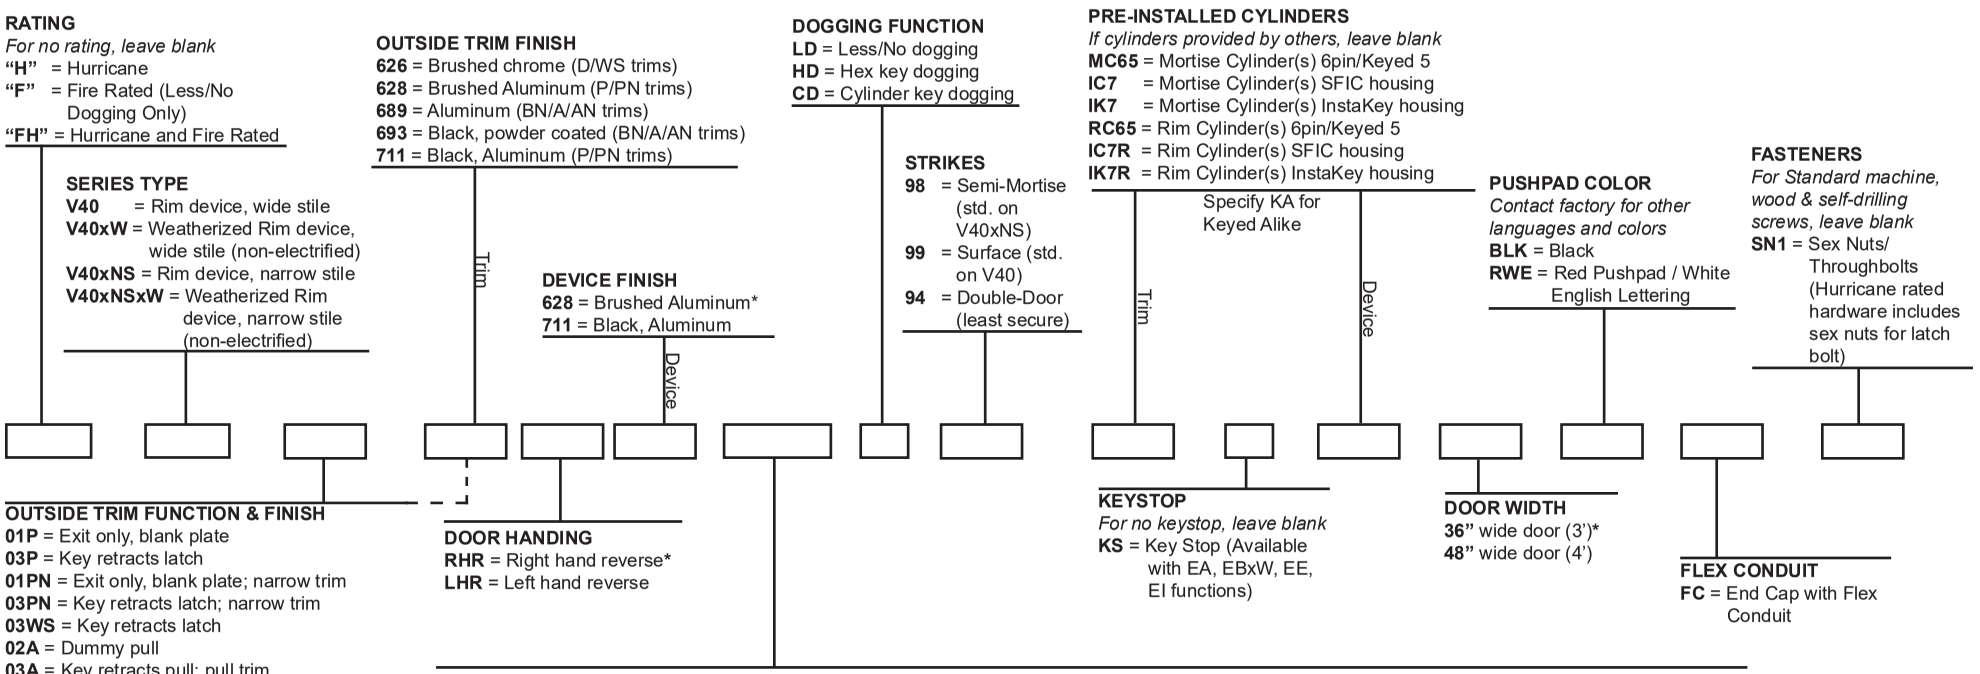

For no electrified function, leave blank

Standard
Select Arming Time and Auto Rearm

EA	= Hardwired Elec. Alarm (Formerly EH/EHxR)
EB	= Elec. Alarm with Battery
ED	= Elec. Dogging
EX	= Request To Exit (Signal) Switch
EXV	= Request To Exit (Current) Switch
EI	= Elec. Integration (logic controller required)
ES	= Elec. Switching (dead latch & OKC switches)

Delayed Egress
Select Arming Delay, Delayed Egress Time and Silent Arming

EE	= Delayed Egress

Delayed Egress Only (EE)
Comes standard with 90-800 power supply
Single = (1) 90-800 w/o bat backup
Pair = (1) 90-800 w/o bat backup

Weatherized Alarms
Select Arming Time and Auto Rearm

EBxW	= Elec. Battery Operated Exit Alarm Weatherized

Latch Retraction

ER	= Elec. Latch Retraction (silencer standard)
ERxW	= Elec. Latch Retraction (silencer standard)

Latch Retraction Only (ER & ERxW)
(Sold Separately)
Single = 81-800
Pair = 82-800
2 Single = 83-800

Weatherized Others

ERxW	= Elec. Latch Retraction (silencer standard)
EXxW	= Request To Exit (Signal) Switch Weatherized
EXVxW	= Request To Exit (Current) Switch Weatherized
WDE	= Weatherized Delayed Egress (see EasyKits)

Also see online version at detex.com/hto

NOTE: * = default/standard

Fire-rated trims must be Fail Safe (FSA)

All fire-rated devices Less Dogging/fail safe

March 9, 2017