



KEY SWITCHES ACCESS CONTROL



1207 - standard key




1210 - ace key for high level security



Key Switch



1209-built-in intercom




economical

stand-alone key switches offer value and a variety of keyed entry devices to control access




mounting options

1207, 1209, 1210 can be surface or post mounted for indoor or outdoor use



construction

1206 ready for easy wall installation



stainless steel

faceplate with a rugged steel cabinet make these switches vandal resistant

- Provides convenience and security for basic access control applications
- Designed for outdoor or indoor use
- Can be post or surface mounted
- Steel cabinets and stainless steel faceplates
- Two keys supplied with each unit
- Mortise cylinders used on 1207 and 1209 models. Ace cylinder used on 1210 model
- Options on model 1209 includes a speaker and push button for connection to an existing intercom system
- Each key switch is housed in a rugged steel cabinet with a stainless steel faceplate making these switches vandal resistant

FEATURES


ACCESS CONTROL SOLUTIONS






KEY SWITCHES


The models 1207 and 1209 are momentary contact devices and utilize a mortise cylinder that can be re-keyed by your locksmith to match other access keys. The model 1209 includes a built in eight ohm speaker, push button, and is lighted. The 1209 is designed to be connected to an existing intercom system and used as a substation to the system. The model 1210 uses an ACE key cylinder that can be turned ON for constant contact applications, such as holding an electronic gate system open.




1206
4.5" H x 2.813" W
114.3mm H x 71.4mm W



1207
5.5" H x 4.25" W x 5.25" D
139.7mm H x 107.9mm W x 133.3" D



1210
5.5" H x 4.25" W x 5.25" D
139.7mm H x 107.9mm W x 133.3" D

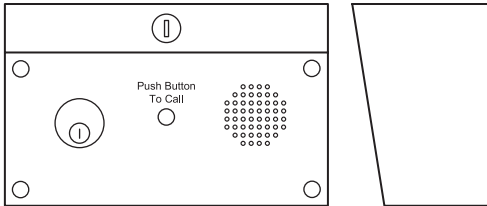

1209
6.125" H x 10" W x 5.25" D
155.5mm H x 254mm W x 133.3" D

Key Switches

Models

- 1206**
- mortise type key cylinder can be re-keyed to match existing locks
 - momentary contact switch can be set Normally Open or Normally Closed
 - mounts into a single-gang- electrical box
 - for interior applications only

- 1207**
- mortise type key cylinder can be re-keyed to match existing locks
 - momentary contact switch can be set Normally Open or Normally Closed
 - easy mounting to wall or post
 - for exterior or interior use

- 1209**
- built-in intercom substation can be connected to an existing intercom master station (may not be compatible with some intercom systems)
 - mortise type key cylinder can be re-keyed to match existing locks
 - momentary contact switch can be set Normally Open or Normally Closed
 - push to call button and 8 ohm speaker
 - lighted push button
 - 16-volt AC power required for light only
 - easy mounting to wall or post
 - for exterior or interior use

- 1210**
- high security Ace type key cylinder
 - constant contact normally open
 - easy mounting to wall or post
 - for exterior or interior use

Features

Stainless steel face plates
16 gauge steel box painted black

Operating Temperature

-10F to 145F
-23C to 62C

Shipping Weight

1206	approx 2 Lb (.9kg)
1207	approx 4 Lb (1.8kg)
1209	approx 9 Lb (4kg)
1210	approx 4 Lb (1.8kg)

Warranty

2 year warranty

Distributed by:

DOORKING, INC.
120 Glasgow Avenue, Inglewood, California 90301 U.S.A. Tel: 310-645-0023 FAX: 310-641-1586 www.doorking.com
© 2006 All Rights Reserved. Product specifications may change without notice. Rev. 11/06

MEMBER:

