VON DUPRIN®

75 Series

Exit Device



OVERVIEW

Mid-Priced, But Beyond Expectations

Enjoy the quality and trust you expect from Von Duprin at a mid-price option. Von Duprin 70 Series exit devices provide reliable performance and peace of mind for applications like warehouse, industrial, office, multifamily, retail, and commercial real estate spaces. The 75 series device is a narrow-stile device available in a wide range of device types, lever designs, options, and finishes.

Von Duprin's 70 Series also can be configured with the Quiet Electric Latch Retraction (QEL) option, which provides electronic control of an exit device where limited operational noise is desired. Plus, quick shipping is an option for time-sensitive projects.

DEVICE TYPES



Rim device



27 Surface mounted vertical rod device



47 Concealed vertical rod device, 5/8" throw

FINISHES

605
Bright Brass


606
Satin Brass


612
Satin Bronze


619
Satin Nickel

625
Bright Chrome


626
Satin Chrome


628
Aluminum, Clear
Anodized


630
Satin Stainless



643e
Aged Bronze


710
Dark Brown,
Anodized


711
Matte Black


Due to the many variations in monitors and printers, color samples may appear different than the physical product. Contact your local sales representative for a physical color sample.

TRIM FUNCTIONS




EO
No outside Trim

- Exit only




DT
Dummy Trim

- Pull when dogged (not recommended for fire device)




NL
Night latch

- Key retracts latch bolt
- Rim cylinder




NLOP
Night latch

- Key retracts latch bolt, optional pull required




L
Lever

- Key locks and unlocks
- 1-1/4" mortise cylinder
- Handed, reversible lever
- E360 L BE only. No cylinder override available




LBE
Lever, blank escutcheon

- Always operable (no cylinder)
- Electrified lever operation available




LDT
Lever, dummy trim

- Pull when dogged



TL
Turn lever

- Key locks and unlocks (use with DT trim)
- 1-1/4" mortise cylinder



TLBE
Turn lever, blank escutcheon

- Blank escutcheon always operable (no cylinder, use with DT trim)

TRIM STYLES



386



388



360L



374T x 386DT



376T x 386DT

Dimensions

Trim Style	Base Width	Base Height	Projection	Grip Width	Grip Height
386/386DT	1-5/8"	7-15/32"	2-7/16"	4-5/16"	8-1/2"
388	1-11/16"	7-15/32"	1"		
360L	1-11/16"	7-1/2"	3"		
360T	1-11/16"	7-1/2"	1-13/16"		
374T	1-11/16"	7-1/2"	7/8"		
376T	1-11/16"	7-1/2"	7/8"		

LEVER STYLES

Standard Levers



01



02
- Knurling available



03
- Knurling available



05



06
- Default lever
- Suites with Schlage Rhodes
- Knurling available



07
- Suites with Schlage Athens




12
- Handed



16
- Suites with Schlage Omega

Dimensions

Lever	Width	Projection
01	4.0"	2.1"
02	4.75"	2.3"
03	4.75"	2.813"
05	3.75"	2.8"
06	4.7"	2.1"
07	4.6"	2.3"
12	4.3"	2.9"
16	5.05"	2.66"



LEVER STYLES

Standard Levers



17

- Suites with Schlage Sparta
- Knurling available



18



Accent (ACC)

- Handed



Asti (AST)

- Handed



Merano (MER)

- Handed




Latitude (LAT)



Longtitude (LON)

Dimensions		
Lever	**Width**	**Projection**
17	4.7"	2.3"
18	4.75"	2.4"
Accent (ACC)	4.4"	3.1"
Asti (AST)	4.2"	2.5"
Merano (MER)	4.1"	2.5"
Latitude (LAT)	4.6"	2.3"
Longtitude (LON)	4.9"	2.3"

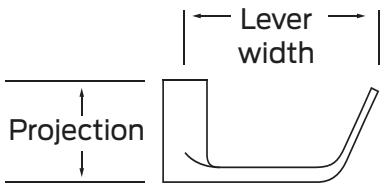

LEVER STYLES

Decorative Levers



M51

- Knurling available



M52

- Knurling available



M53



M54



M55



M56



M57[1]



M61


- Handed



M62[1]

- Handed

Dimensions		
Lever	**Width**	**Projection**
M51	4.5"	2.5"
M52	4.5"	2.4"
M53	4.4"	2.4"
M54	4.4"	2.3"
M55	4.4"	2.7"
M56	4.5"	2.3"
M57	4.5"	2.7"
M61	4.5"	2.7"
M62	4.6"	2.4"



[1] Available in stainless steel substrate only

LEVER STYLES

Decorative Levers



M63

- Handed



M81

- Knurling available



M82



M83



M84



M85

- Handed



ME1[1]

- Handed



ME2[1]


- Handed



ME3[1]

Dimensions

Lever	Width	Projection
M63	4.6"	2.6"
M81	4.8"	2.5"
M82	4.9"	2.5"
M83	4.7"	2.25"
M84	5.1"	2.2"
M85	4.9"	2.7"
ME1	5.4"	2.6"
ME2	5.2"	2.4"
ME3	5"	2.8"



[1] Designed with Gensler as product design consultant

ELECTROMECHANICAL OPTIONS

Switches	
LX	**Latch Bolt Monitoring**
	• Signals use of an opening • SPDT switch to monitor latch bolt • 2 A maximum @ 24VDC; below 50 mA @ 24VDC for low current option
RX	**Request to Exit**
	• Signals use of an opening • SPDT switch to monitor pushpad • 2 A maximum @ 24VDC; below 50 mA @ 24VDC for low current option

Miscellaneous	
ALK	**Alarm Exit Kit**
	• Unauthorized opening triggers 85-decibel horn • Set in armed or disarmed mode by key • Assembly includes both a 24VDC input and external inhibit
CON	**Allegion Connect**
	• Common connectors to connect various door hardware all the way to the power supply
E360	**Electric Locking and Unlocking Trim**
	• Remains latched while unlocked • Remote electrical control • Voltage: 24VDC (Continuous Duty) • Current: 0.22 amps

Latch Retraction	
QEL	**Quiet Electric Latch Retraction**
	• Bolt retraction via switch • Converts exit door to push-pull operation • Voltage: 24VDC • Current: 1.0 A inrush (0.5 sec.) / 0.14 A holding

MECHANICAL OPTIONS

Dogging	
CD	Cylinder Dogging, Panic Only
HD	Hex Dogging, panic only
LD	Less Dogging
QEL	QEL options available

California Code	
AX	**Accessible Device**
	• UL certified to meet new 5 lb. maximum operating force requirement • Exceeds ANSI/BHMA requirements

Weatherized	
WH	**Weep Holes**
	• Drainage (weep) holes in mechanism case

DEVICE OPTIONS MATRIX

Matrix shows available options per device type, but does not represent compatibly across multiple options.


	Mechanical Options							E-Options					
	CD	**HD**	**LD**	**WH**	**AX**	**LBR**	**F-LBR/ AFL**	**LX**	**RX**	**QEL**	**ALK**	**CON**	**E-TRIM**
75-R	•	•	•	•	•			•	•	•	•	•	•
75-R-F				•	•			•	•	•	•	•	•
7527	•	•	•	•		•		•	•	•	•	•	•
7527-F				•			•	•	•	•	•	•	•
7547	•	•	•	•		•		•	•	•	•	•	•
7547-F				•			•	•	•	•	•	•	•

SPECIFICATIONS

Accessibility	• Force to depress push pad
	  • AX device: 5 lbs
	  • Standard device: 15 lbs
	• Push pad projection
	  • Neutral: 3-13/16" (97mm)
	  • Depressed: 3-1/16" (78mm)

Certifications/Approvals	All Von Duprin 75 exit devices are ANSI/BHMA Certified. Please refer to the BHMA Certified Products Directory for specific listings.
Mounting Height	39-13/16" (1011mm) 39-11/16" (1008mm) with mullion
Warranty	36 months from the date of placing the product in operation

DIMENSIONS

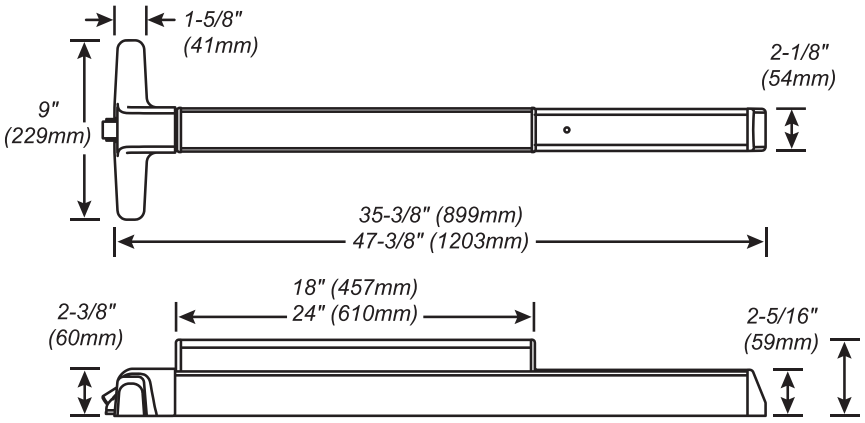

Neutral: *3-13/16" (97mm)*
Depressed: *3-1/16" (78mm)*

© 2024 Allegion plc
015808, Rev. 01/24