

Architectural Door Accessories

ASSA ABLOY

Pemko Commercial Threshold

The global leader in
door opening solutions


Applies to the following products:

**159_P, 159_V, 252X226_P, 254X226_P,
255X226_P, 252X226_V, 254X226_V, 255X226_V,
252X226_FGP, 253X226_FGP, 254X226_FGP,
255X226_FGP, 252X226_FGV, 253X226_FGV,
254X226_FGV, 255X226_FGV**


Installation Instructions:

1. Carefully cope to fit within the frame opening making sure seal will make contact with door face.
2. Trim seal 1/16" longer than threshold at each end. Use a sealant or compound at all edges and joints.
3. Fasten with screws provided.

Top (plan) view of door opening (out-swing type)

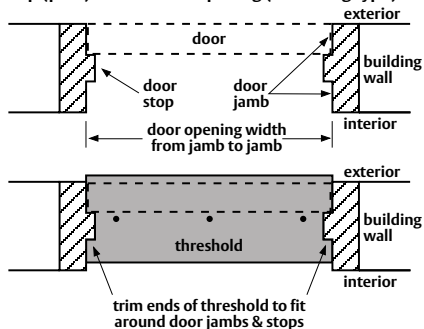

Tools Required:



Testing/Ratings:



www.pemko.com

MEMPHIS, TN USA VENTURA, CA USA VANCOUVER, BC CA TORONTO, ON CA
P: 800 824-3018 P: 800 283-9988 P: 877 535-7888 P: 877 535-7888
F: 800 243-3656 F: 800 283-4050 F: 877 535-7444 F: 877 535-7444

Copyright © 2017 Pemko Manufacturing Co., an ASSA ABLOY Group company. All rights reserved.
Reproduction in whole or in part without the express written permission of Pemko Manufacturing Company is prohibited.

CT19_WEBINS
Rev 2 - 01.26.17
Page 1 of 1