

Architectural Door Accessories

ASSA ABLOY

Pemko Commercial Threshold


The global leader in
door opening solutions

Applies to the following product:


**273x224_FGT, 274x224_FGT, 275x224_FGT,
2746x224_FGT, 278x224_FGT, 279x224_FGT,
273x292_FGPK, 274x292_FGPK, 275x292_FGPK,
2746x292_FGPK, 278x292_FGPK, 279x292_FGPK**

Installation Instructions:

1. Carefully cope to fit within the frame opening making sure seal will make contact with door face.
2. Trim seal 1/16" longer than threshold at each end. Use a sealant or compound at all edges and joints.
3. Fasten with screws provided.

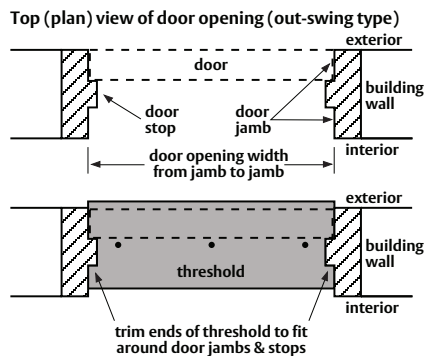

Tools Required:

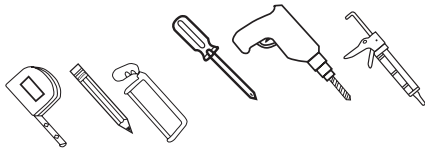

Testing/Ratings:

Gasketing material for fire doors intended for application to listed steel frames and/or classified steel covered composite type, and hollow metal type fire doors rated up to 3 hours; wood and plastic covered composite type fire doors rated up to 1-1/2 hours; and wood core type fire doors rated up to 20 minutes. (Thresholds may or may not contain gasketing material).



www.pemko.com

MEMPHIS, TN USA P: 800 824-3018 F: 800 243-3656
VENTURA, CA USA P: 800 283-9988 F: 800 283-4050
VANCOUVER, BC CA P: 877 535-7888 F: 877 535-7444
TORONTO, ON CA P: 877 535-7888 F: 877 535-7444

Copyright © 2017 Pemko Manufacturing Co., an ASSA ABLOY Group company. All rights reserved.
Reproduction in whole or in part without the express written permission of Pemko Manufacturing Company is prohibited.

CT34_WEBINS
Rev 3 - 06.06.18
Page 1 of 1