




Catalog Number 23084 - 23586
UPC Number
Description Winged Wire Connectors

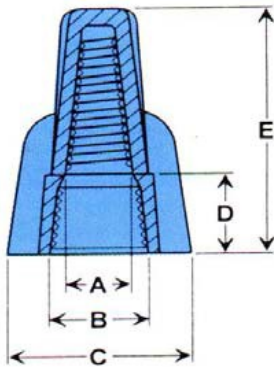

Features

- Five color-coded screw on wire connectors cover a full range of wire sizes from 22 through 8 Awg
- Ribbed-Cap provides a more secure grip and faster fingertip starts even when hands become slippery
- Swept wing fits into your hand naturally to give extra leverage, torque and reduce the effort required for terminating even large wire combinations, yet compact, with narrow profile
- Temperature rated at 221°F (105°C) maximum
- No pre-twisting of conductors is required – spring creates its own thread
- Reusable screw on wire connector threads on or off splice for fast and easy circuit changes and additions
- Tough, UL 94V-2 Flame retardant shell will not crack or break, even when applied to maximum wire combinations under extreme pressure

General

Material: Heavy Duty Thermoplastic
Spring Steel Wire Core

Dimension Information

See Engineering Dwg

Specifications

Flammability Rating: UL 94V-2
Temperature Rating: 212°F(105°C)
Voltage Rating: 600V 1000V Lighting Fixtures & Signage

Packaging

Bag Qty See Table

Certifications

UL UL 486C
cULus cULus
ROHS Yes

www.morrisproducts.com

Morris Products 53 Carey Road, Queensbury, NY 12804



No.	Color	Wire Combinations	Max Volts	A	B	C	D	E	Qty	Case Qty	
Hanging Bag Small Pack											
23284	Yellow	3 #12 min: 2 #18	600V, 1000V fixtures & signs	0.252	0.386	0.717	0.354	1.016	25	1250	
23285	Tan	Max: 3 #10 Min: 3 #22	600V, 1000V fixtures & signs	0.283	0.457	0.720	0.362	1.142	25	1250	
23286	Red	Max: 5 #12 Min: 3 #16	600V, 1000V fixtures & signs	0.354	0.531	0.906	0.378	1.252	25	1250	
23288	Gray	Max: 3 #10 Min: 3 #14 w/1 #18	600V, 1000V fixtures & signs	0.394	0.587	1.000	0.394	1.311	6	1250	
23290	Blue	Max: 1 #8 w/3 #10, Min: 2 #10 w/1 #12	600V, 1000V fixtures & signs	0.472	0.740	1.260	0.516	1.575	6	1250	
Boxed 100 Pack											
23084	Yellow	3 #12 min: 2 #18	600V, 1000V fixtures & signs	0.252	0.386	0.717	0.354	1.016	100	6000	
23085	Tan	Max: 3 #10 Min: 3 #22	600V, 1000V fixtures & signs	0.283	0.457	0.720	0.362	1.142	100	4800	
23086	Red	Max: 5 #12 Min: 3 #16	600V, 1000V fixtures & signs	0.354	0.531	0.906	0.378	1.252	100	3600	
Bagged Bulk Pack											
23184	Yellow	3 #12 min: 2 #18	600V, 1000V fixtures & signs	0.252	0.386	0.717	0.354	1.016	500	5000	
23185	Tan	Max: 3 #10 Min: 3 #22	600V, 1000V fixtures & signs	0.283	0.457	0.720	0.362	1.142	500	5000	
23186	Red	Max: 5 #12 Min: 3 #16	600V, 1000V fixtures & signs	0.354	0.531	0.906	0.378	1.252	500	5000	
23188	Gray	Max: 3 #10 Min: 3 #14 w/1 #18	600V, 1000V fixtures & signs	0.394	0.587	1.000	0.394	1.311	100	2500	
23190	Blue	Max: 1 #8 w/3 #10, Min: 2 #10 w/1 #12	600V, 1000V fixtures & signs	0.472	0.740	1.260	0.516	1.575	100	1500	
Small Jar											
23384	Yellow	3 #12 min: 2 #18	600V, 1000V fixtures & signs	0.252	0.386	0.717	0.354	1.016	200	6400	
23385	Tan	Max: 3 #10 Min: 3 #22	600V, 1000V fixtures & signs	0.283	0.457	0.720	0.362	1.142	150	4800	
23386	Red	Max: 5 #12 Min: 3 #16	600V, 1000V fixtures & signs	0.354	0.531	0.906	0.378	1.252	100	3200	
Large Jar											
23484	Yellow	3 #12 min: 2 #18	600V, 1000V fixtures & signs	0.252	0.386	0.717	0.354	1.016	550	6600	
23485	Tan	Max: 3 #10 Min: 3 #22	600V, 1000V fixtures & signs	0.283	0.457	0.720	0.362	1.142	450	5400	
23486	Red	Max: 5 #12 Min: 3 #16	600V, 1000V fixtures & signs	0.354	0.531	0.906	0.378	1.252	300	3600	
Handy Pack											
23584	Yellow	3 #12 min: 2 #18	600V, 1000V fixtures & signs	0.252	0.386	0.717	0.354	1.016	250	4000	
23585	Tan	Max: 3 #10 Min: 3 #22	600V, 1000V fixtures & signs	0.283	0.457	0.720	0.362	1.142	200	3200	
23586	Red	Max: 5 #12 Min: 3 #16	600V, 1000V fixtures & signs	0.354	0.531	0.906	0.378	1.252	130	2080	