


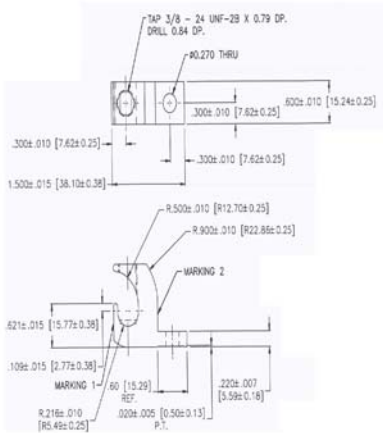

Catalog Number	90575
UPC Number	60198690575
Description	Copper Lay-In Grounding Connector

Features

- Manufactured from High Strength High Conductivity Copper Alloy
- Electro-Tin Plated
- Steel Set Screw
- Open Face Lay-In Design
- Dual Rated for Copper & Aluminum Conductors
- Equipment, Ground Grid, Conduit Ground, Solar

General

Material:	Pure Electrolytic Copper
Finish:	Electro-Tin Plated
Screw Type:	Steel
Screw Size:	.26"
Wire Range:	#14 awg - 1/0

Dimension Information

Length: 1.50"
Height: 1.17"
Width: .593"

Specifications


Temperature Rating	
Voltage Rating	600
Flammability Rating	
Amp Rating	

Packaging

Box Qty	100
---------	-----

Certifications


UL	486B
CSA	Yes
RoHS	N/A




TAP 3/8 - 24 UNF-2B X 0.79 DP.
DRILL 0.84 DP.

Ø0.270 THRU

ASM. NO. C00494026
PART NO. C00210026
C00021026





3/8-24 X .875 LG.
SLOTTED STEEL SCREW
C39201002 (1 REQ'D)
ASSEMBLE SCREW SNUG
TO BOTTOM (5-15 IN/LBS)

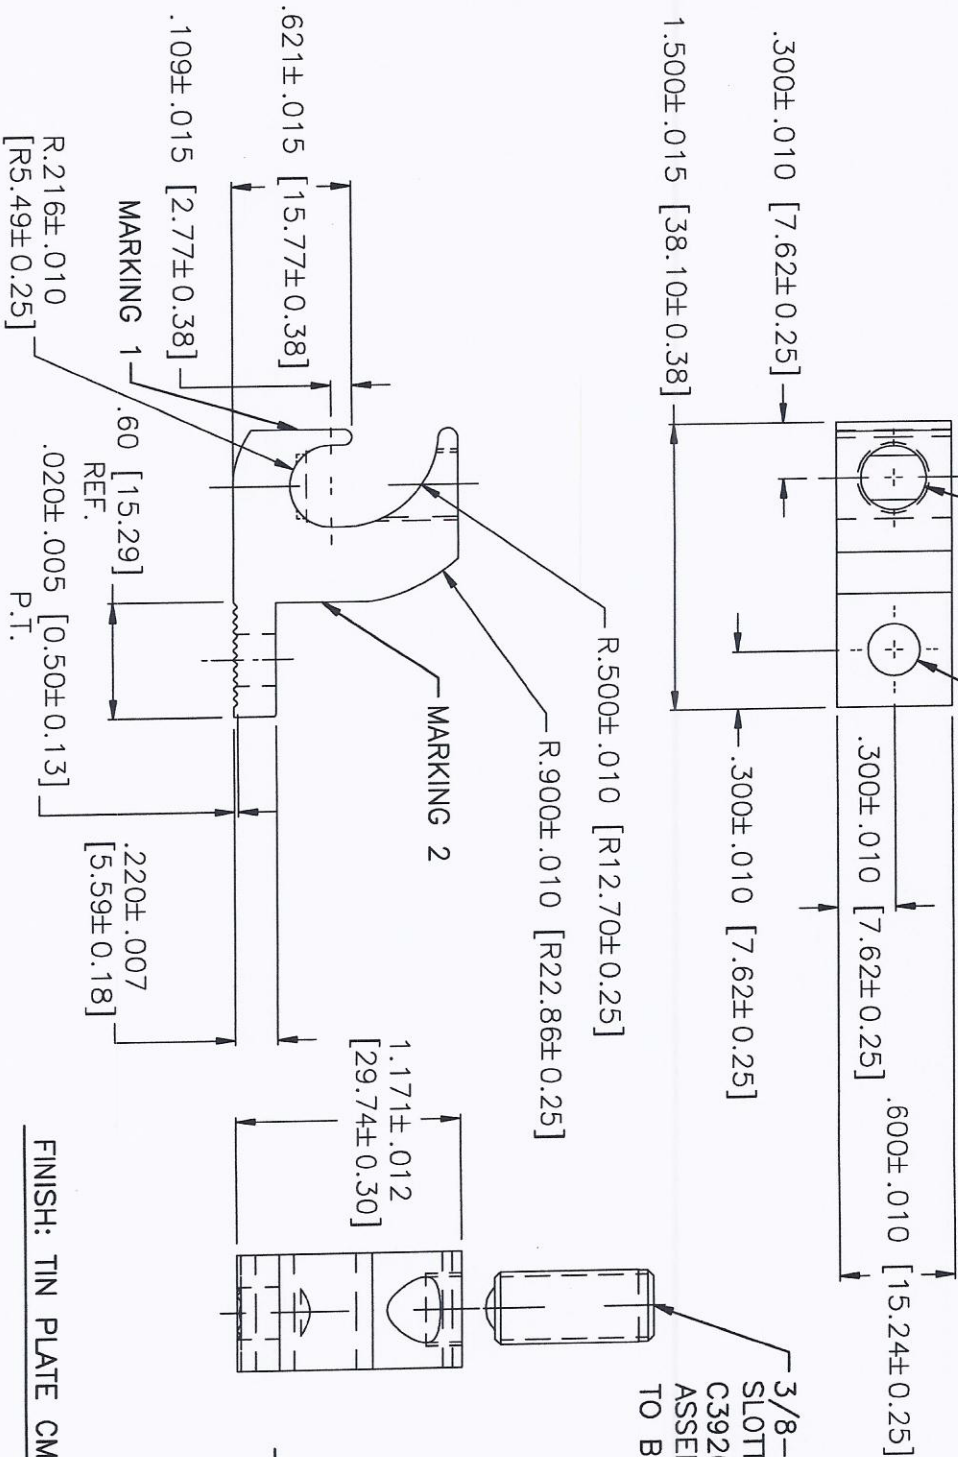

FINISH: TIN PLATE CMS-02

MARKING 1 MARKING 2



					UNLESS OTHERWISE SPECIFIED		DRAWN BY DAF	NAME OF PART	CAT. NO.
					.00 = ±.015 .000 = ±.005 ANGLES = ±1/2°		10-29-01	LAY-IN LUG	90575
					[X] = DIMENSION IN MILLIMETERS			MATERIAL C00601008 6061-T6 ALUM.	SCALE 2X
CROSS REFERENCE # -									
REV.	DESCRIPTION	ECN	DATE	INT.					
M	REDRAWN ON NEW CAD SYSTEM	7193	10-01	DAF					
8									