ATTACHES RELIABLE FASTENERS

PWQW17Z...(KG)

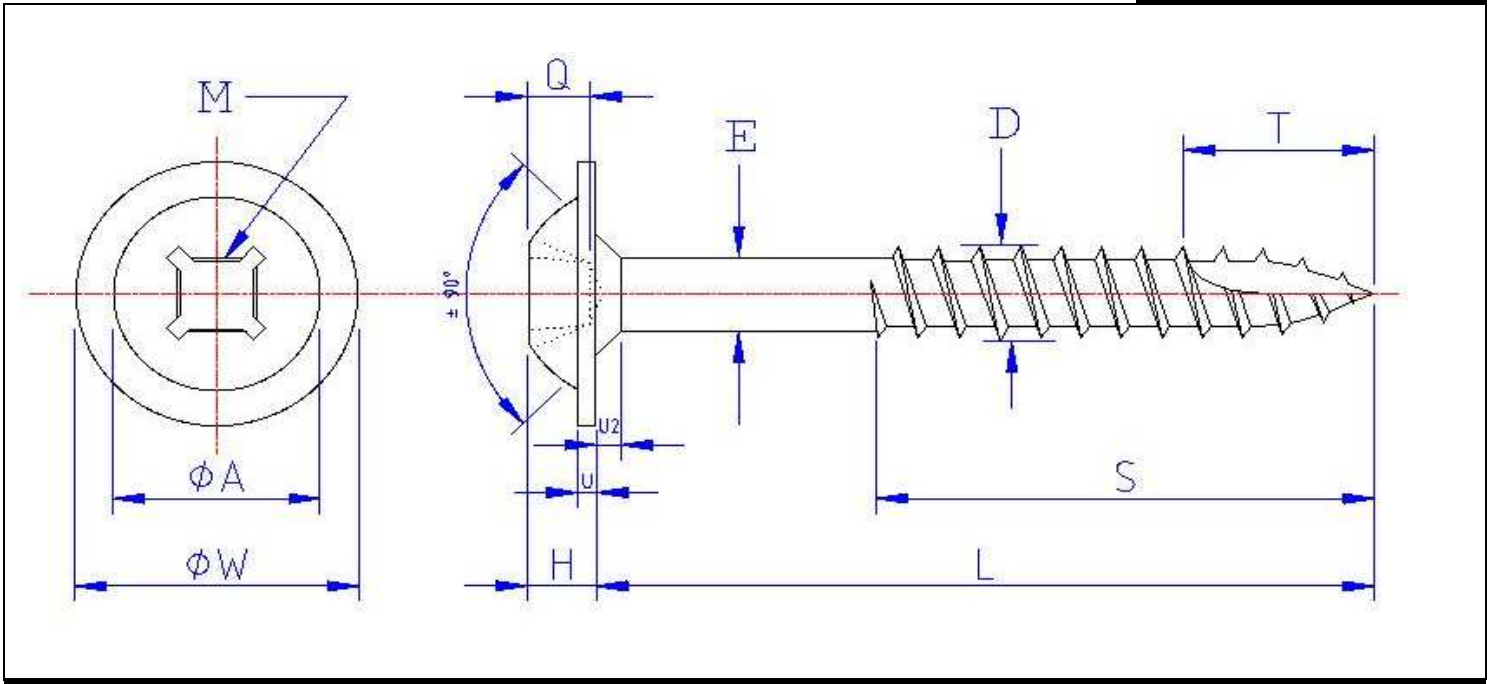

unit: INCH

L LENGTH TOLERANCE	> 5/8" to ≤ 1-1/2"	+0	-0,05
	> 1-1/2" to ≤ 2-3/4"	+0	-0,06

S THREAD LENGTH	Half Thread

SCREW	M PUNCH		Q DRIVE DEPTH	H HEAD HEIGHT	U WASH. HEIGHT	U2 COLAR HEIGHT	W WASHER DIAM.	A HEAD DIAM.	E BODY DIAM.	D THREAD DIAM.	T POINT LENGTH	THREAD PER INCH	TORK INCH/ POUND
# 7	# 2	Min	0,060	0,101	REF. 0,040	REF. 0,040	0,358	REF. 0,295	0.116	0.144	0,290	16	30
		Max	0,075	0,113			0,380		0.127	0.155	0,350		

Pan Washer head, Quadrex recessed, Single lead thread, Type-17, ZINC

Date : 30 juin 2014

Done by : P.B.