TIP-ON BLUMOTION for MOVENTO

Features

- New four-dimensional adjustment
  - — Side-to-side, ±**1.5** (front and rear)
  - — Height, +**3**
  - — Tilt, +**5**
  - — Depth, with TIP-ON BLUMOTION units, -**1**/+**2**
  - — Depth, with elongated holes, ±**4.5**
- Integrated BLUMOTION soft close
- Wide range of drawer lengths from 12" to 30", in 3" increments
- Runners for 1/2" to 5/8" drawer material thickness
- Bottom mount holes for mounting to a fixed shelf or a flush bottom cabinet
- Exceeds ANSI/BHMA A156.9 2010 grade 1 specifications
- Standard duty, 125 lb static load capacity
- Heavy duty, 170 lb static load capacity
- Excellent stability and less sag, even when drawer is fully loaded
- Bearing block for consistent reveal, even in a fully loaded drawer
- Rear notch increases to **125** (4-15/16") to accommodate new TIP-ON BLUMOTION feature
- Same drawer box construction as TANDEM runners

Accessories

- TIP-ON BLUMOTION, a touch-to-open feature with soft close
- Lateral stabilization available for wide drawer applications
- Wide variety of ORGA-LINE drawer organization options

Drawer Preparation and Installation Differences

TIP-ON BLUMOTION for MOVENTO

Drawer Preparation

TANDEM 563/569 program

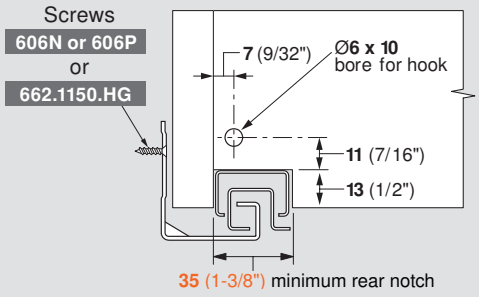

MOVENTO 763/769 program

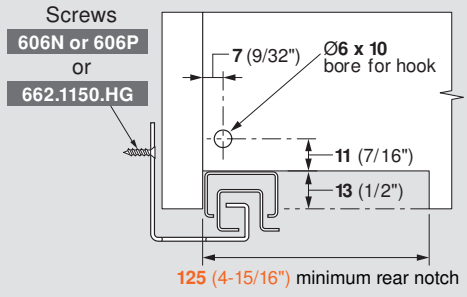

Differences

- Rear notch width changes from **35** (1-3/8") to **125** (4-15/16")
- No change to mounting screws
- No change to rear hook hole location, depth or diameter

Locking Device Installation

TANDEM 563/569 hole location

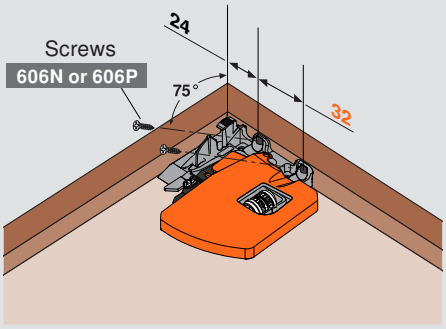

	Part No.
Without side adjustment	**T51.18xx**
With side adjustment	**T51.19xx**

MOVENTO 763/769 hole location

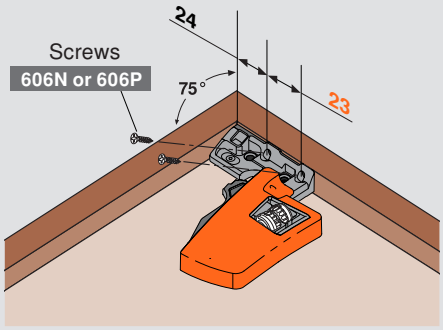

	Part No.
With side adjustment	**T51.76xx**

Differences

- **9** (11/32") difference in mounting hole location

NOTE: The locking devices are not interchangeable between TANDEM and MOVENTO.

Concealed Runner Installation

TANDEM 563/569

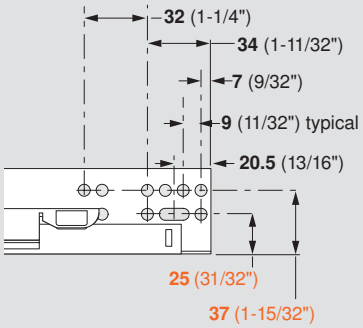

MOVENTO 763/769



Differences

- The top hole location in height changes from **37** (1-15/32") to **38** (1-1/2") in flush bottom applications
- The bottom hole location in height changes from **25** (31/32") to **26** (1-1/32") in flush bottom applications