ASSA ABLOY, the global leader in door opening solutions
Rixson® is a registered trademark of Yale Security Inc., an ASSA ABLOY Group company. Copyright© 2003, 2014, Yale Security Inc., an ASSA ABLOY Group company.
All rights reserved. Reproduction in whole or in part without the express written permission of Yale Security Inc. is prohibited.

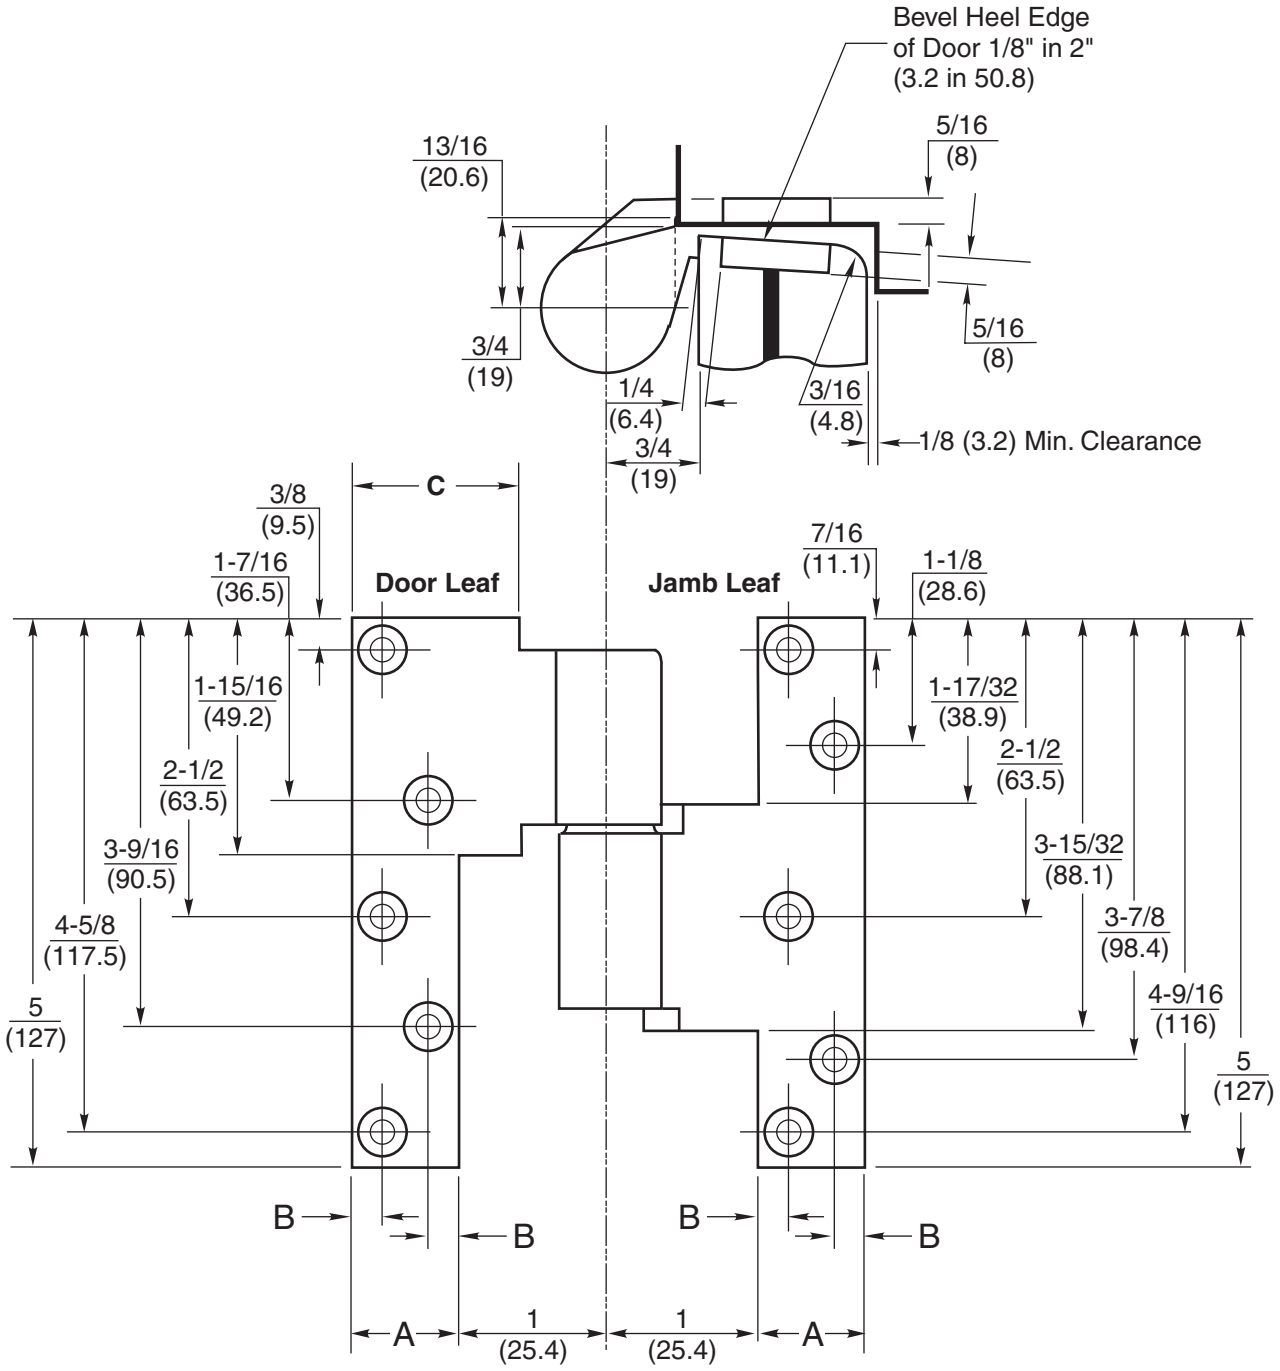

Door Thickness	A	B	C	Max. Lead Thickness
1-3/4 (44.4)	1-1/4 (31.8)	1/4 (6.4)	1-1/2 (38.1)	9/32 (7.1)
2 (50.8)	1-1/2 (38.1)	5/16 (7.9)	1-3/4 (44.4)	3/8 (9.5)
2-1/4 (57.1)	1-3/4 (44.4)	5/16 (7.9)	2 (50.8)	15/32 (11.9)
2-1/2 (63.5)	2 (50.8)	5/16 (7.9)	2-1/4 (57.1)	9/16 (14.3)
3 (76.2)	2-7/16 (62)	5/16 (7.9)	2-11/16 (68.3)	3/4 (19)

For Door Thickness Not Listed–Use Next Size Smaller for Prep

Notes:
1. Do not scale drawing.
2. Dimensions are given in inches (mm).
3. Pivot drilled for 1/4-20 x 5/8" FHMS or #14 x 1-1/2" FHWS.
4. Right hand shown.

ML19 and FML19 Side Jamb Pivot for Heavy or Leadlined Door 3/4" Offset – Handed

RIXSON
ASSA ABLOY
www.rixson.com

TEMPLATE NUMBER	DATE
IP50070	03-14