



SPICE STORAGE PULL-OUT


WARNING: Unit is prone to tipping prior to being properly secured to a fixed shelf. Use caution when handling during installation and only attach the unit to the permanently fixed bottom shelf of a cabinet. Attaching the unit to an adjustable shelf will risk injury.

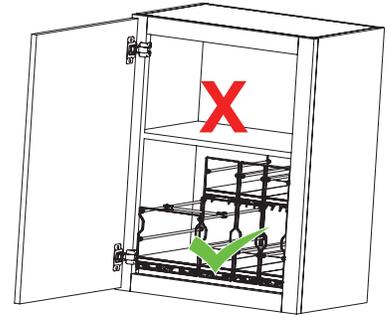

- 1) Remove unit from package.




- 2) Position unit in cabinet to ensure clearance of sides and hinges.

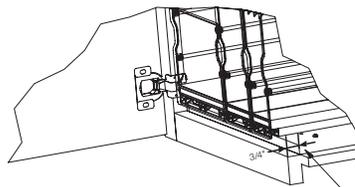


NOTES:
IF YOUR CABINET HAS A FRONT FRAME
POSITION THE BASE AGAINST THE BACK EDGE
OF THE FRAME
IF YOUR CABINET DOES NOT HAVE A FRONT FRAME
POSITION THE BASE AT LEAST 3/4" BACK FROM THE
FRONT EDGE OF THE BOTTOM SHELF

- 3) Use pencil to mark where you want the front corners of the base to be positioned.


- 4) Remove each rack from its slide by advancing each slide forward then depressing the release lever under the slide of each rack.

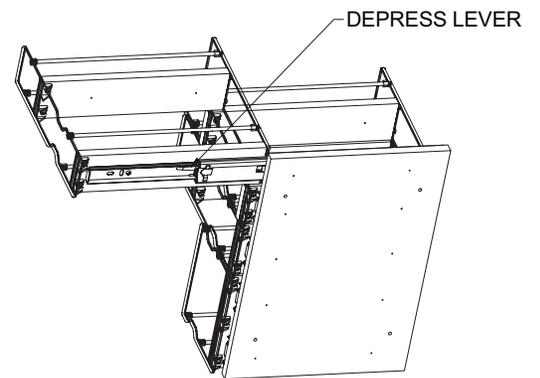


- 5) Orient base so that the slides pull forward.

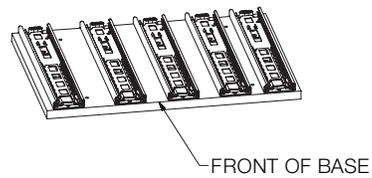

- 6) Place base in cabinet as shown, positioning the front corners of the base where the cabinet was marked in Step 3.

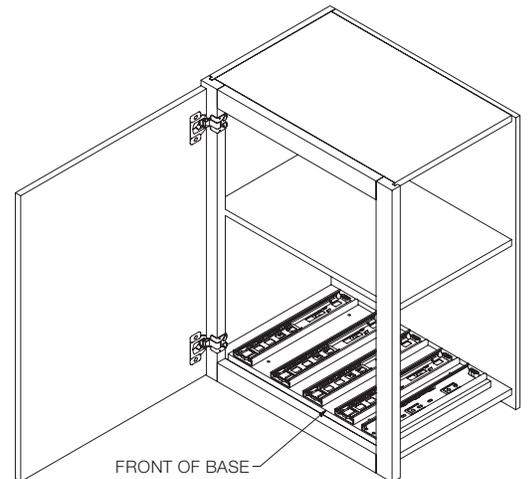

- 7) Attach the base to the cabinet with the (4) wood screws provided in the (4) pre-drilled mounting holes.

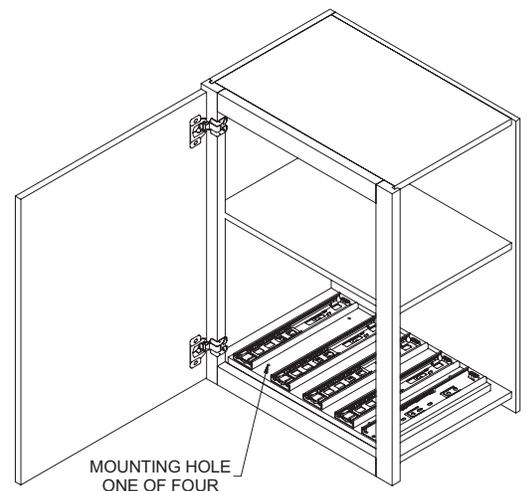


- 8) Insert each rack back into position (see notes below).

Slide Preparation:

Note:


- 1) **Make sure the carriage shown in bronze color below are fully forward and secure in the plastic guide shown in blue below.**
- 2) **It is of great importance to keep the rack and mounted slide level with each other when inserting.**
- 3) **Some racks have more than one slide.**

Insert the spice rack into the mounted base member. Push the rack in until completely closed. Cycle the spice rack two or three times to complete installation.

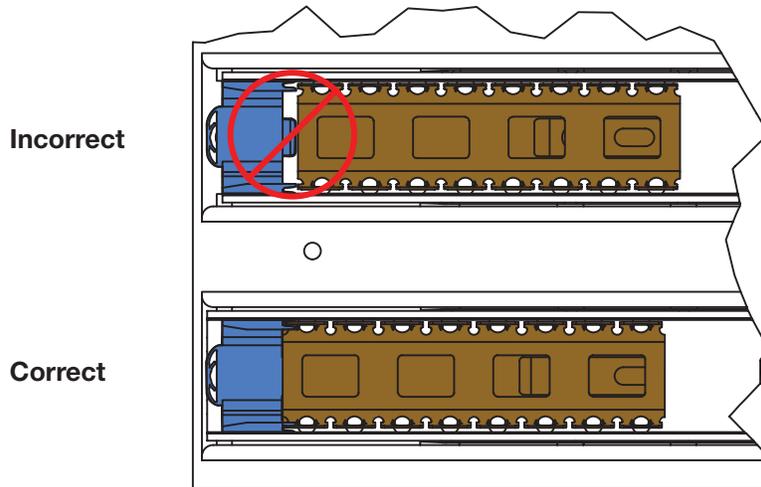

Warning: Ensure racks are properly attached to their slides and operating smoothly prior to filling racks to avoid injury from tipping during use.

- 9) Installation complete. Your racks are ready for use. Please note the weight limits below for each type of rack.

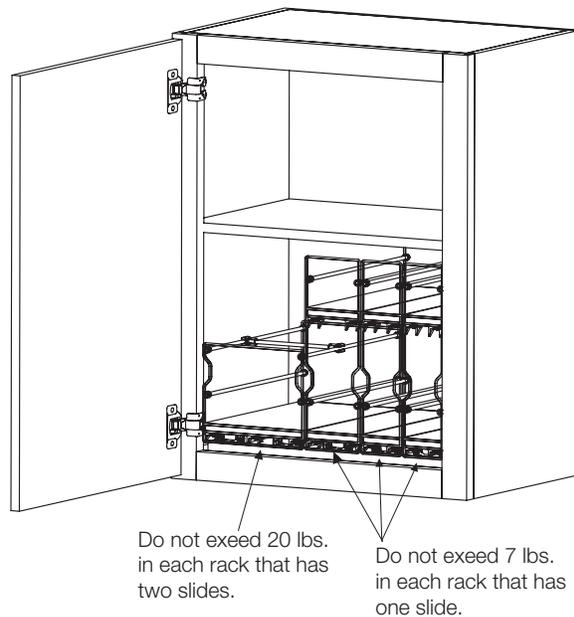

HÄFELE

3901 Cheyenne Drive • Archdale, NC 27263
1-800-423-3531 • www.hafele.com/us